



PULL-DOWN KITCHEN FAUCET

INSTALLATION INSTRUCTIONS

Model:CA-W3374


Notes before installation:

- 1.Please check that all components are present.
- 2.Before installation ensure that all feed lines are clear of debris
- 3.Pictures in the manual are general in content and may not represent exactly your purchased faucet.If you are having difficulties, please contact a professional plumber.


Daily maintenance:

- 1.Use a soft cloth and vinegar to remove hard-water spots
- 2.DO NOT use abrasive cleaning products as the use will break down finish and will void the product warranty.
- 3.Acceptable cleaners include vinegar or mild non-abrasive liquid detergents.
- 4.If the water volume appears to be less than optimum,remove, inspect, clean, or replace aerator.


Tools we will need:




Adjustable Wrench




Phillips Screwdriver

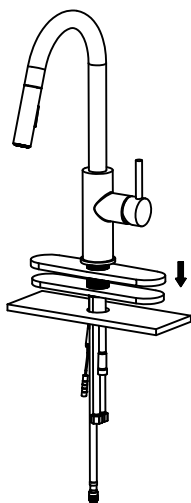


1. Remove the metal lock nut, metal washer, and rubber washer from the faucet shank. Install the faucet shank and flexible supply lines through the counter-top hole

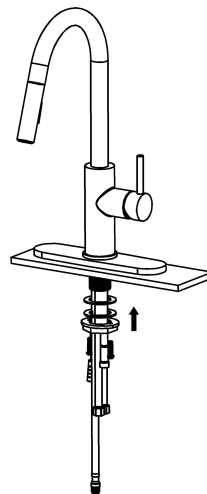

2. Replace the rubber washer, metal washer, and locking nut. Hand-tighten the lock nut up to the underside of the countertop, ensuring the faucet is in the proper position; securely tighten the screw on the lock nut.

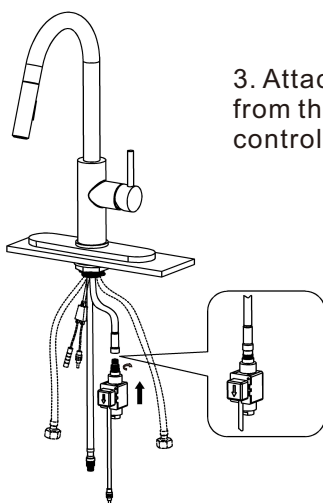


3. Attach the short braided hose from the faucet to the top of the control box.

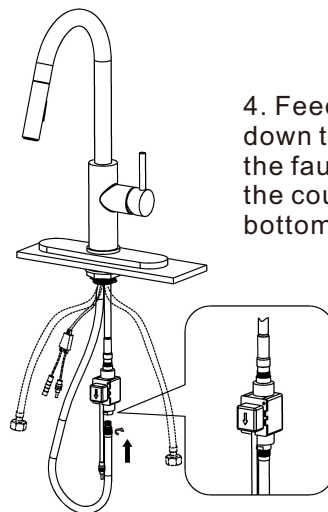


4. Feed the black sprayer hose down the faucet spout and through the faucet body to the underside of the countertop and connect it to the bottom of the control box.


Note: Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties, please contact a professional plumber.

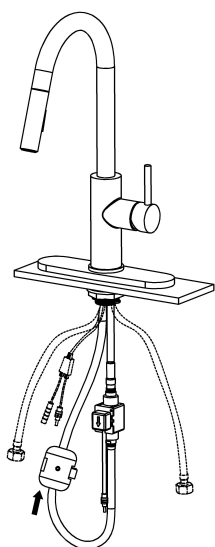


5. Install the gravity weight onto the spray hose. The weight should be placed approximately 2" above the natural curve in the hose.

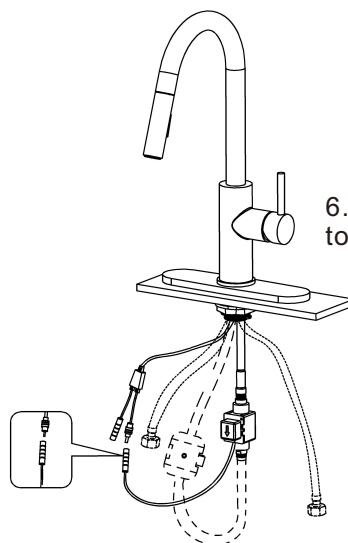


6. Attach the black connector to the black line from control box.

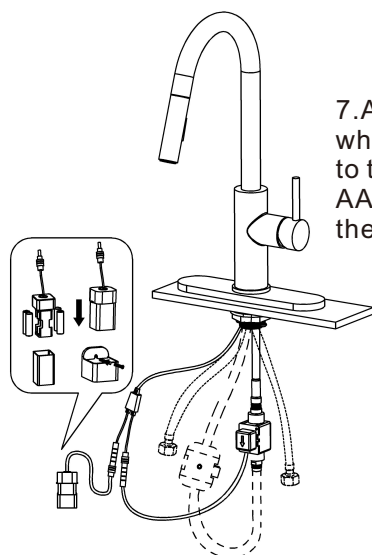


7. Attach the power connector, which houses the batteries, to the control box. Insert four AA batteries(not Include) into the battery compartment.

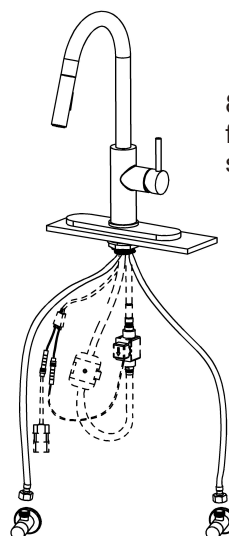

8. Attach the hot and cold flexible supply lines to the shut off valves.

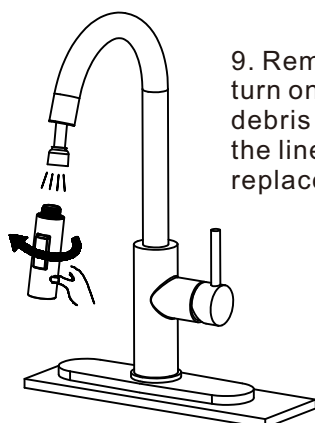


9. Remove the sprayer head and turn on the faucet to flush out any debris that may be in the lines. After the lines have been flushed, replace the sprayer head.

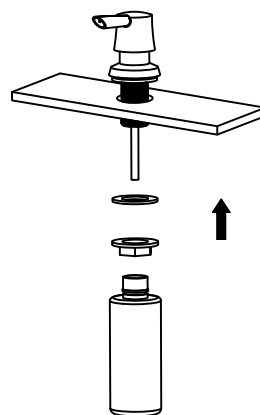

10. To install the soap dispenser, unscrew the plastic soap bottle from the soap dispenser pump and remove the mounting nut and rubber gasket from the shank. Insert the soap dispenser pump into the countertop, from the underside of the countertop, place the rubber gasket and mounting nut onto the shank. Screw the nut up to the countertop and tighten. Place the plastic soap bottle to the shank and spin it counterclockwise until it stops. NOTE: To fill the soap simply remove the soap dispenser pump and pour soap into the opening.

Note: Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties, please contact a professional plumber.

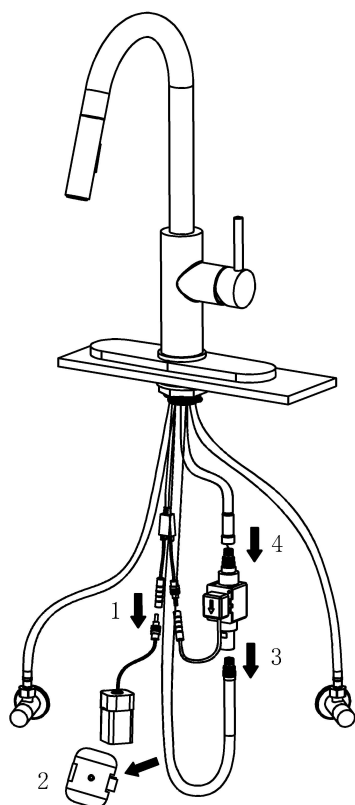


Note: If the faucet can not be turned on with sensor, please try to remove the control box under the counter, that will help you to continue to use the faucet.

Step 1: Remove the battery box.

Step 2: Remove the weight from the pull-down hose.

Step 3: Remove the pull-down hose from the control box.

Step 4: Remove the control box from the short braided hose.

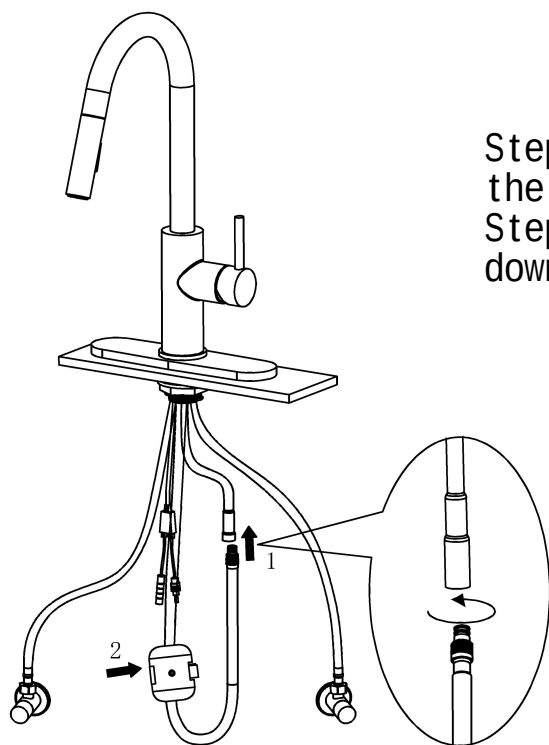

Step 1: Tighten the pull-down hose to the short braided hose.

Step 2: Install the weight to the pull-down hose.

Note: Pictures in the manual are general in content and may not represent exactly your purchased faucet. If you are having difficulties, please contact a professional plumber.