




## Onemount™ #10004 Instruction Sheet

US Patents  
#8,033,563  
#11,628,698  
#11,660,916

**Disclaimer:** The ratings of the Onemount™ System are intended to represent the capability of the product and in no way reflect the ratings or capacity of the towing system it is being used with. You, the consumer or operator, are strongly advised to learn the ratings of the various components of the towing system and never exceed the limits of the lowest rated component being used.

- The 1-7/8" Hitch Ball is rated for 2,000 lbs capacity
- The 2" Hitch Ball is rated for 8,000 lbs capacity
- The 2-5/16" Hitch Ball is rated for 10,000 lbs capacity
- The Step Platform can be used when the Triball mount is not being used for towing purposes

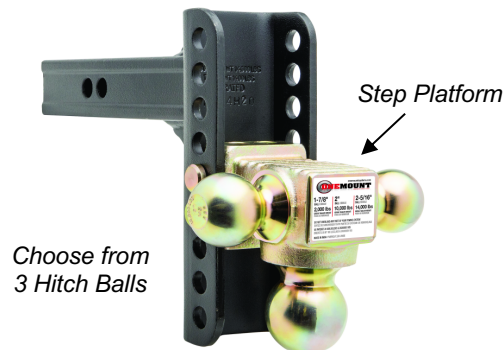

**WARNING:** Do not exceed vehicle's towing capacity or receiver hitch capacity, whichever is less. See your Vehicle Owners Manual to determine Vehicle Tow Rating.

1. Install the Platform shank into the 2" receiver hitch of your vehicle and secure it with the included hitch pin and clip. Always secure the hitch pin with a cotter pin.
2. Find the correct hitch ball for your towing application – and raise or lower the Triball with Step to the desired height within the platform channel. Insert both of the supplied clevis pins through the holes that line up with the holes in the platform. Secure each pin with the included cotter pins.

**Note:** The supplied clevis pins are specifically engineered for the Onemount™ System. If replacement pins are needed, they must be replaced with original factory One Mount™ pins. **WARNING:** Use of any pin other than of Onemount™ manufacture could be a serious safety hazard and will void the warranty.

3. Prior to towing, check to make sure that the pins are secured into place with cotter pins.
4. Never hook up trailer safety chains to the Onemount™ System.



The preinstalled rubber bumper will help to reduce noise and rattle, but is not required for towing. The rubber bumper can be adjusted by turning it clockwise or counter-clockwise.

**Warning:** Please ensure that the safety chains operate freely around the Onemount™ System and don't become entangled in the Platform or Ball Accessory.