

⚠ WARNINGS ⚠

- Risk of electric shock - Disconnect power at the source before installation.
- If you are unsure about the installation or the maintenance of the wall light, please consult an electrician.
- Do not make or alter any holes in the wiring enclosure or modify any electrical componentry.




CAUTIONS

- To insure personal safety, proper grounding of the electrical fixture is required.
- The fixture must be wired in accordance with the National Electric Code and applicable local codes or ordinances.

WIRING INSTRUCTIONS


If you are replacing an existing fixture, remove and disconnect the old fixture first.

1. Ensure that power has been turned off by switching the circuit breaker or by removing the fuse from the fuse panel.
2. Remove the mounting bracket from light fixture. (Figure 1)
3. Expose the supply wires from the outlet box.
4. Position the supply wires with the white supply wire on one side of the outlet box and the black supply wire on the other side.
5. Attach the mounting bracket to the outlet box by allowing the outlet box screws to pass through the slot in the mounting bracket. (Figure 2)
6. Connect the outlet box ground wire (green or copper) to the fixture ground wire (green) using a wire connector.
7. Connect the white wire from the fixture assembly to the neutral supply wire (typically white) from the post using a wire connector (Figure 3)
8. Connect the black wire from the fixture assembly to the hot supply wire (typically black) from the post using a wire connector (Figure 3)

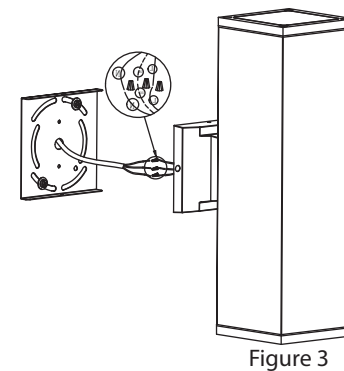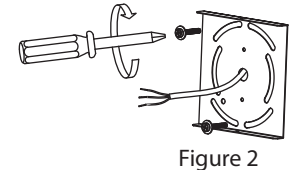

FIXTURE MOUNTING INSTRUCTIONS

1. After all connections are secure, carefully tuck the wires into the electrical outlet box. No loose strands or loose connections should be present.
2. Attach the fixture mounting plate to the fixture mounting screws on either side of the mounting bracket. Make sure no wires are pinched or exposed.
3. To prevent moisture from entering the outlet box and the fixtures mounting plate causing a short, apply a bead of clear caulk to outline the outside of the fixtures mounting plate where it meets the wall. Leave a small space at the bottom to allow any condensation or moisture to escape.
4. The installation is now complete. Restore the electricity and check the operation of your lighting fixture.

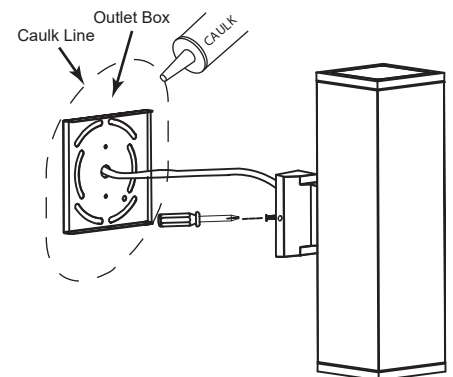

3 YEAR WARRANTY

Maxxima extends a 3 year limited warranty to the original purchase that the products listed are free from defects in material and/or workmanship only. Maxxima will replace any warrantied product to the original consumer/purchaser if the product fails because of defects due to workmanship and/or materials within the limited warranty period. Limited warranty is not transferable and applies to the original installation of the Maxxima product. This offer does not constitute in any way a product guarantee and Maxxima does not hereby assume any obligation whatsoever beyond sending a free replacement product.