

# 6' MULTI-FUNCTION SCAFFOLD

## GENERAL SAFETY GUIDES AND ASSEMBLY INSTRUCTIONS

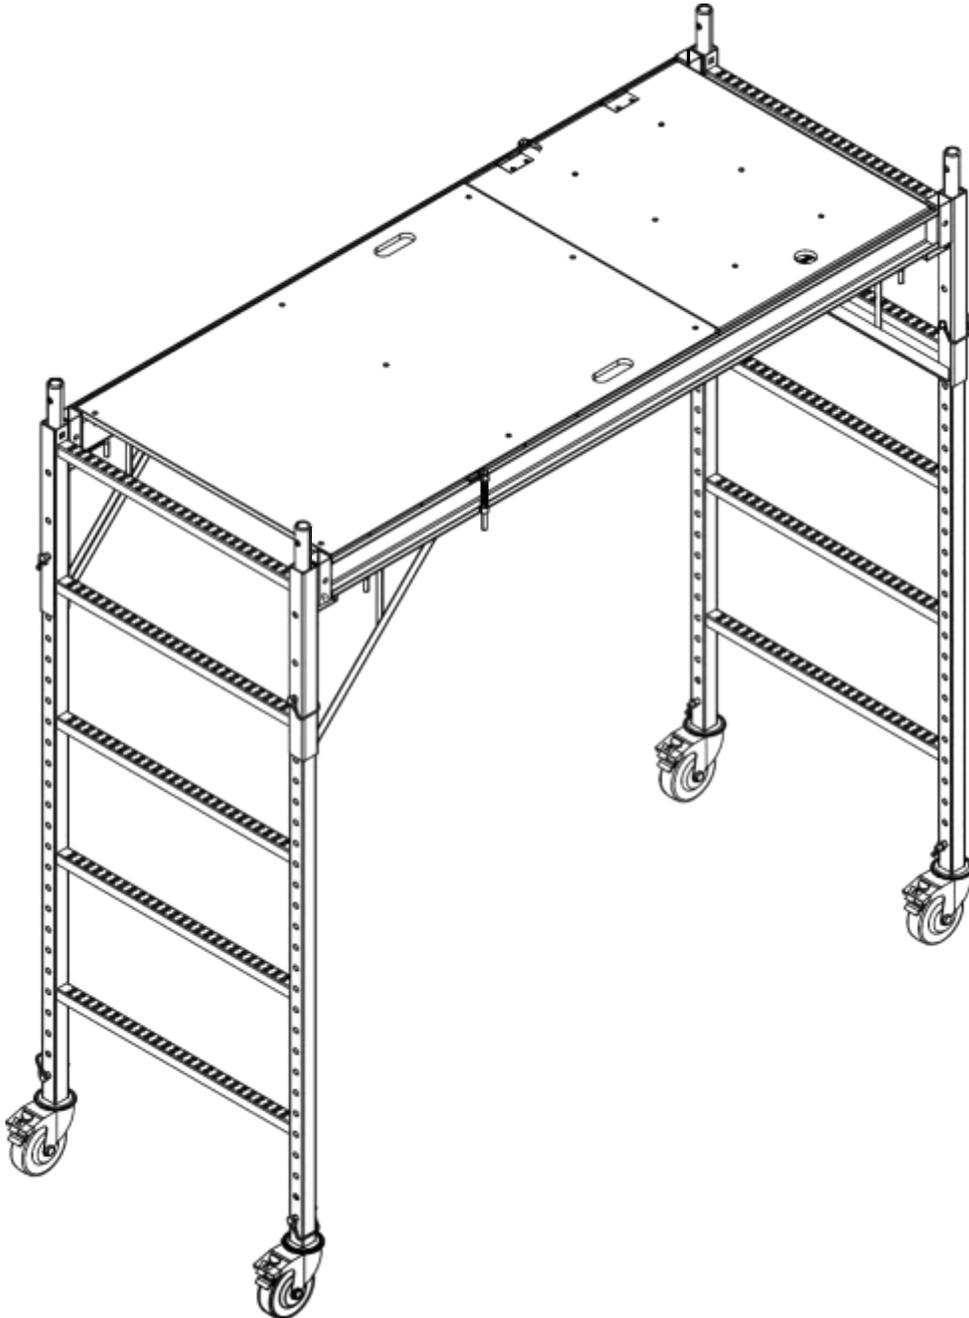


Image may differ in appearance from the product

# GENERAL SAFETY GUIDELINES

## LOAD CAPACITY

This equipment is design to safely support a maximum load of **1,100 lbs (499 Kg)** equivalent to one person standing on the scaffold plus materials.



**DO NOT OVERLOAD**

For your safety and the safety of anyone near the scaffolds, please follow the following safety guidelines:

Before using the scaffold:

- **Keep the safety rules and manual instructions available every time that the scaffold is in use.**
- Always verify that the parts are in good condition before using the scaffolds. Make sure that parts are not damaged, bent, broke or missing.
- **Follow all the local, state, and national codes, ordinances, and regulations applicable to scaffolds.**
- **PINCHING Hazard!** Use safety gloves when assembling the scaffold.
- Check that all the locking components (pins and caster brakes) are secured in the assembly as per this manual.
- A maximum of 3 units can be stacked vertically. Guardrails and outriggers **MUST** be used when stacking units.
- **Consult with the manufacturer in case of doubt when assembling the scaffold.**
- Contact the manufacturer if any part is missing or damaged when opening the box.

During use of the scaffold:


- Do NOT use scaffold at a height of 6ft or more without installing guardrails (sold separately) on all open sides of the platform.
- Always access the platform from the inside of the scaffold using the ladder frame and through the trap door.
- **Avoid using scaffold near power lines. Be aware of electricity near the area working.** 
- NEVER move the scaffold while people are standing on it.
- Use this scaffold on a firm surface free of debris, holes, or obstructions.
- **DO NOT use this scaffold to tie-off a person for falling arrest.**
- ALWAYS use outriggers (sold separately) when stacking units.

**Refer to the Manufacturers Scaffolding Safety Guidelines booklet included in the box for a complete guide on scaffold safety regulations as per OSHA, ANSI and CSA standards.**


For more information about scaffolding, see OSHA's Safety Topics [osha.gov/scaffolding](https://www.osha.gov/scaffolding)

# BOX CONTENT


ID	PART CODE	DESCRIPTION	QTY.
A	MPISI-A1	LADDER FRAME	2
B	MPISU-A2	BRACE	2
C	MPISU-A3	PLATFORM	1
D	CAS5SS4P	CASTERS	4
E	PNSP2	LOCKING PIN	8

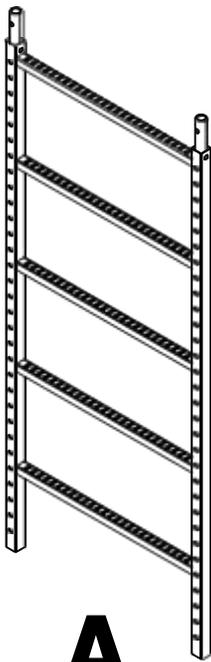


**A**

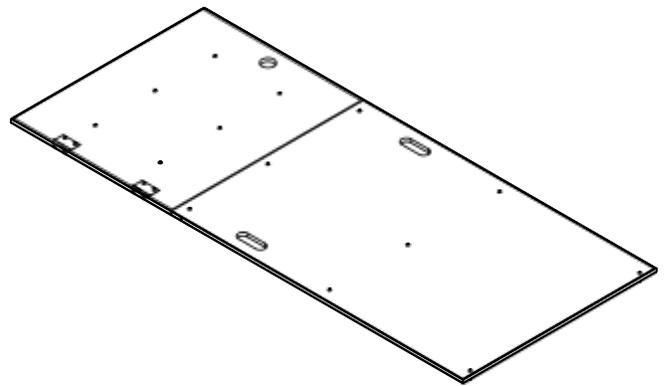

**C**



**D**

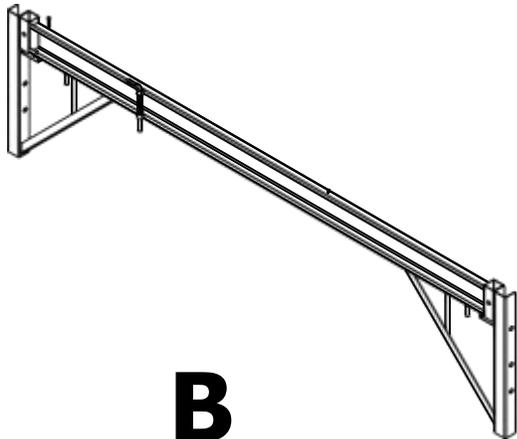

**B**



**E**

- 1 Place ladder frames on the floor.
- 2 Install casters on ladder frame.
- 3 Tightly lock the casters by depressing the brakes. (Fig. 1).
- 4 Install locking-pins to secure the casters. (Fig. 2).
- 5 Repeat steps (1-4) for the second ladder frame.

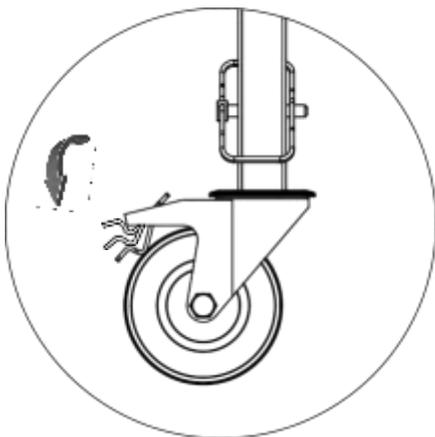
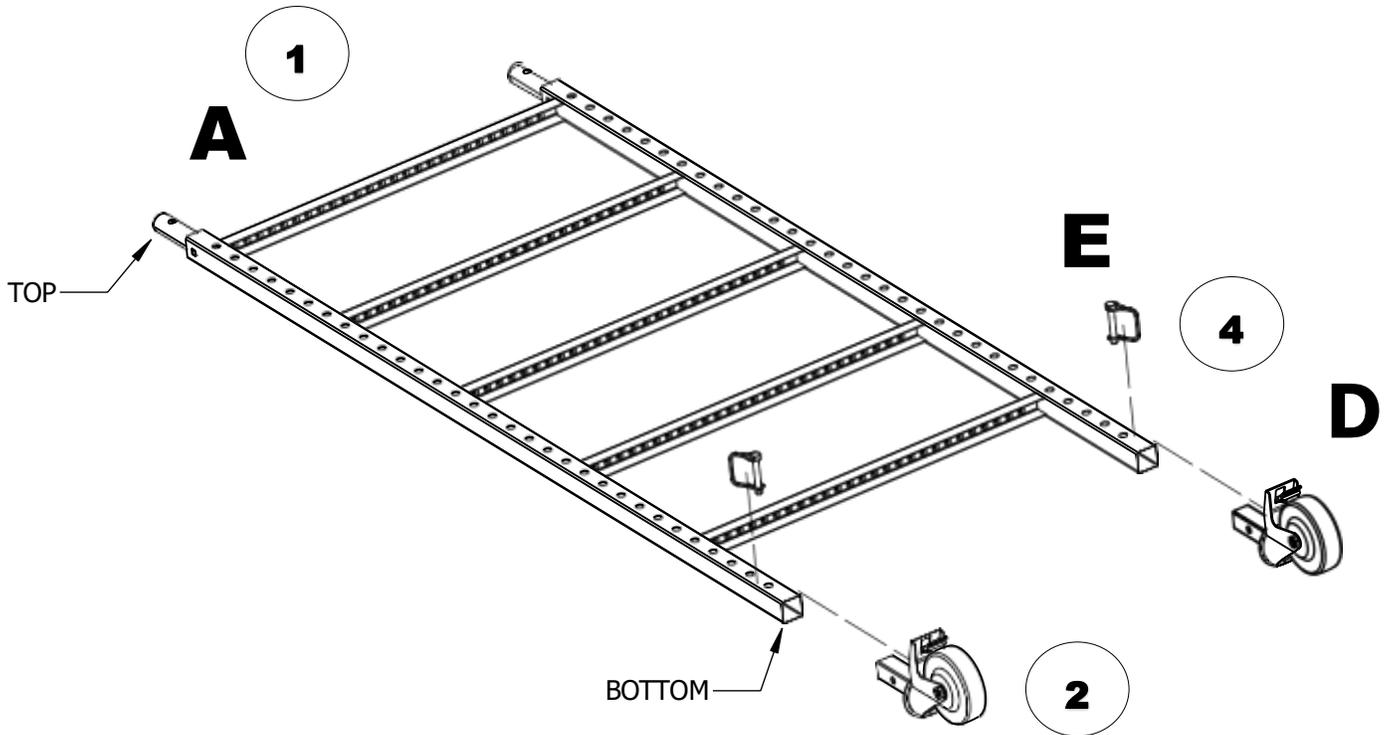


Fig. 1

3

CASTER  
SECURED

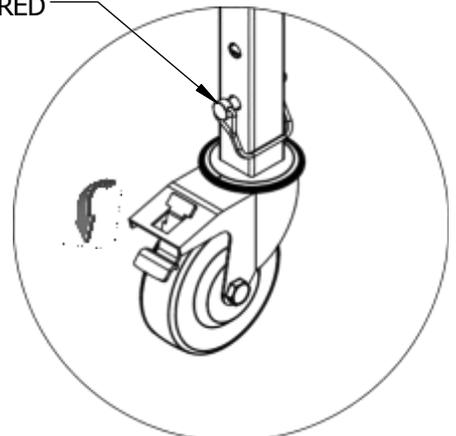


Fig. 2

- 6 Place one brace on the floor.
- 7 Pull the spring-pin (Fig.1) and place one ladder frame onto the brace, so that the middle rung is close to the brace.
- 8 Align the spring-pin with one hole of the ladder frame until the spring-pin is locked. (Fig 1)

NOTE: Spring-pin is locked when stopper reaches the square tube. (Fig. 2)

- 9 Repeat the steps 6-8 on the opposite side with second ladder frame.

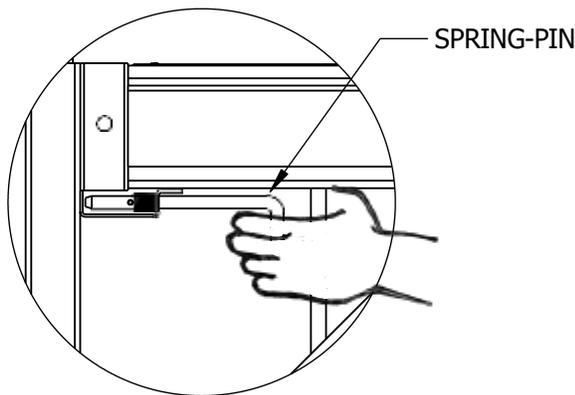
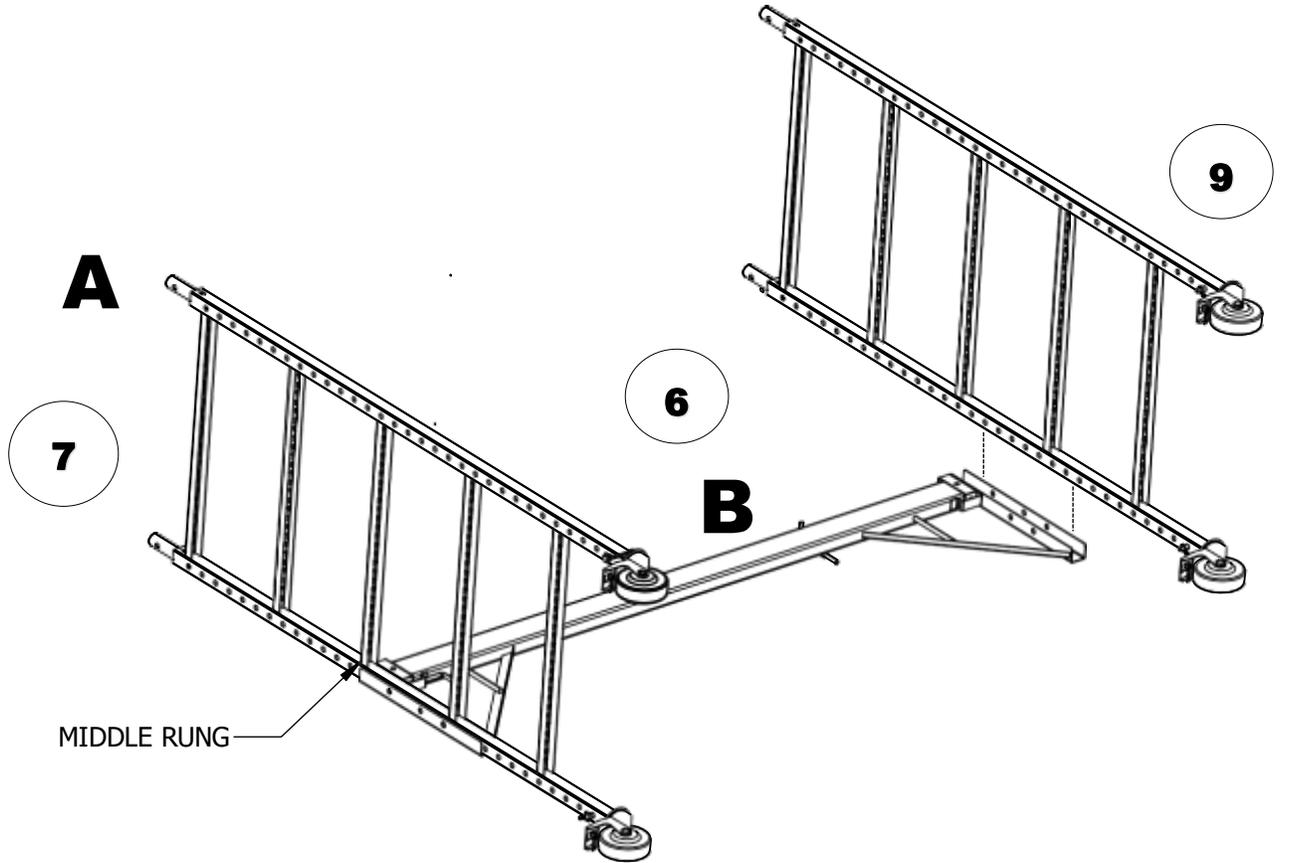


Fig.3.

SPRING-PIN  
PULLED

8


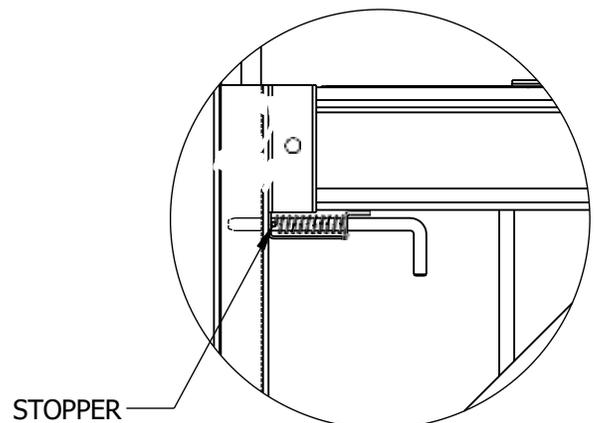


Fig.4

SPRING- PIN  
FULLY ENGAGED

- 10 Install the second brace following the steps 7 and 8. Make sure both braces are aligned.
- 11 Stand the assembly up.

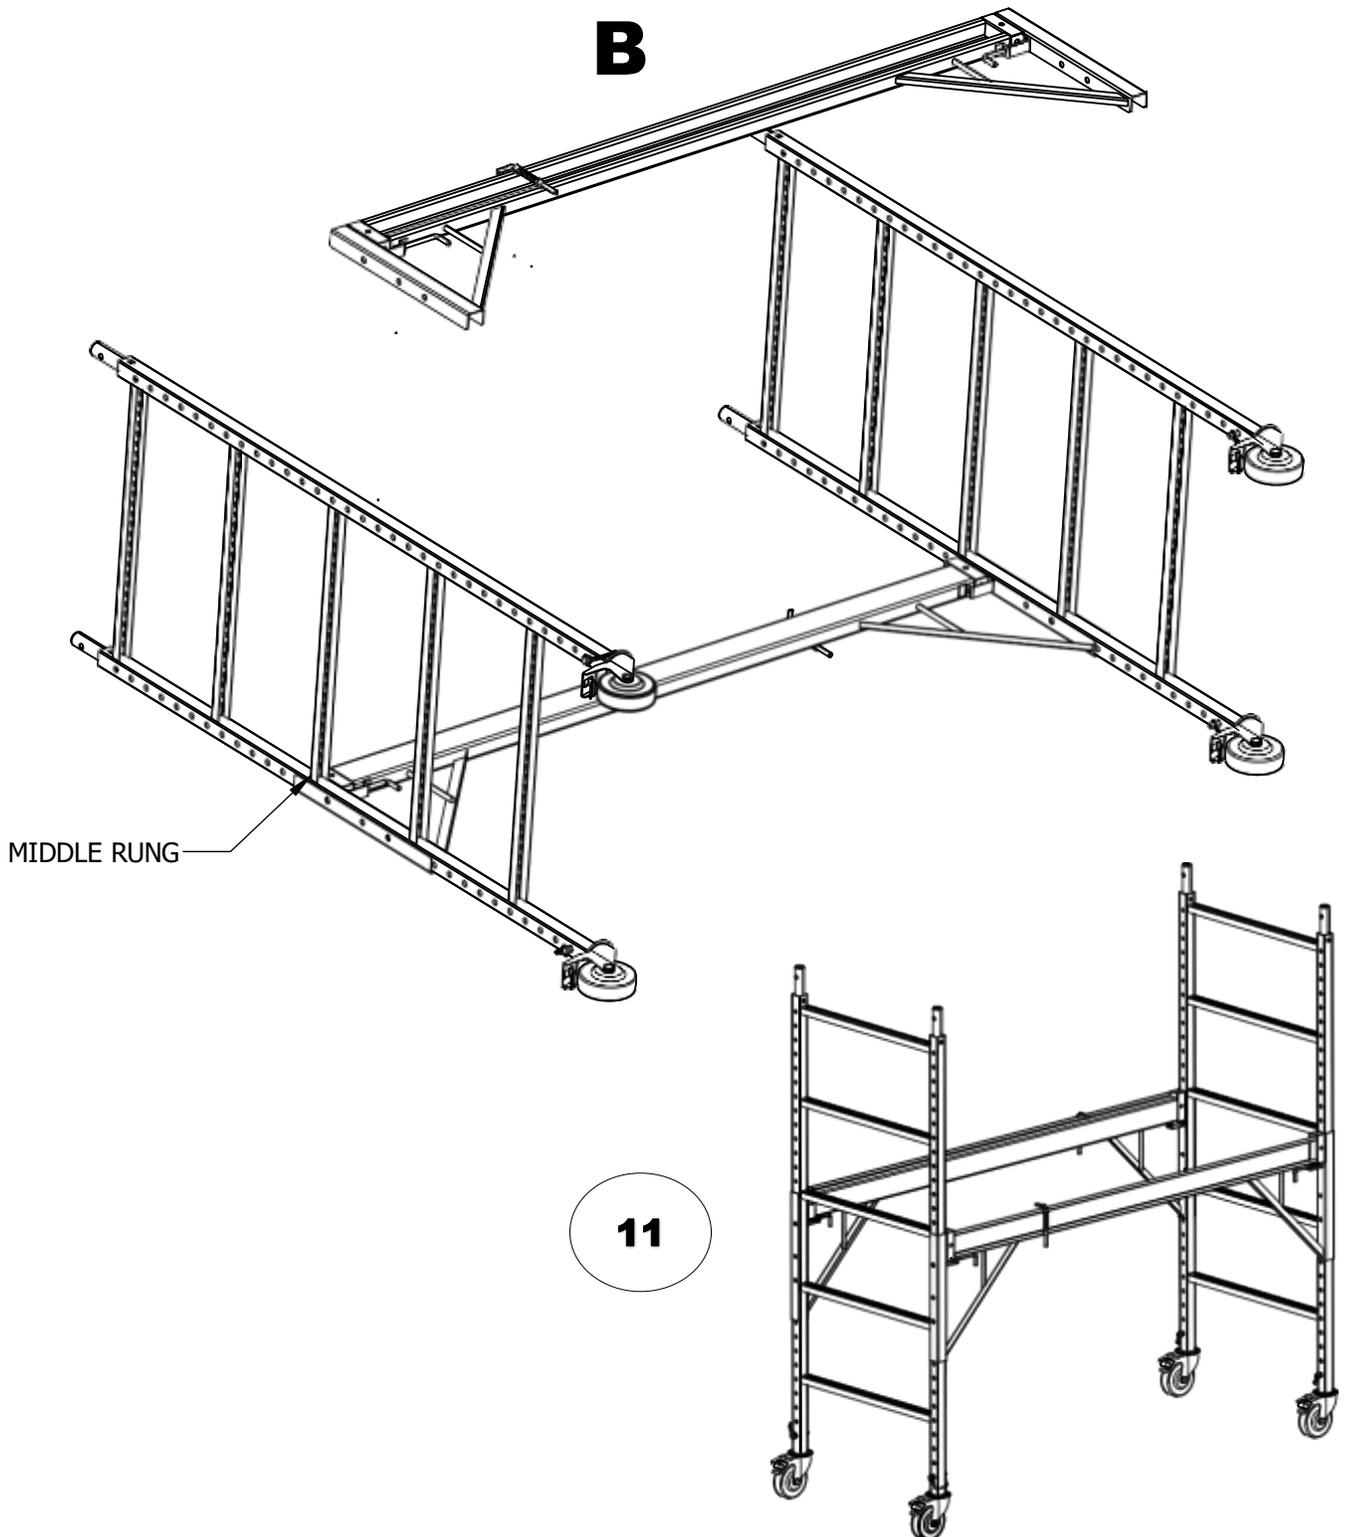

- 12 Adjust the height of the braces as desired using the spring-pins.
- 13 Install the locking-pins into the assembly. (Fig. 1)
- 14 Make sure that the securing-pins attached to the braces are turned outward. (Fig. 2)
- 15 Place the platform within side rails of the braces.  
Note: Check all corners to make sure the platform fits all around.
- 16 Turn the securing-pin towards the platform. (Fig 3)

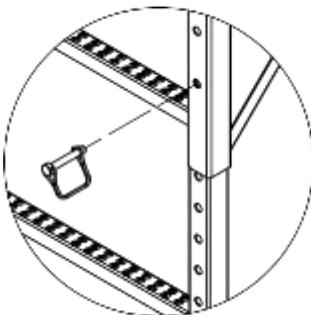
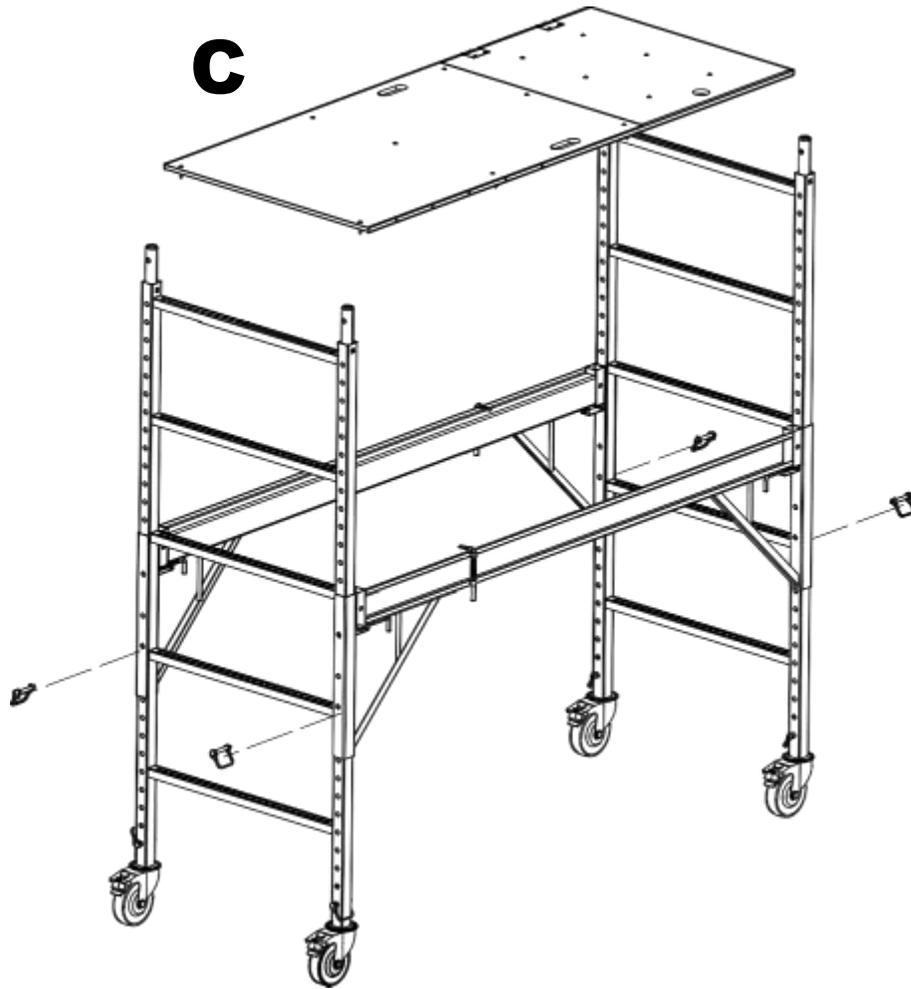


Fig 5

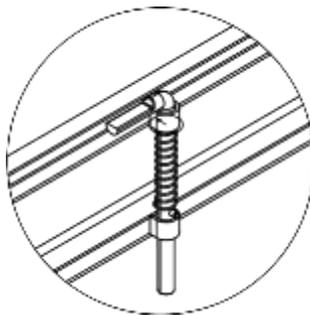


Fig 6

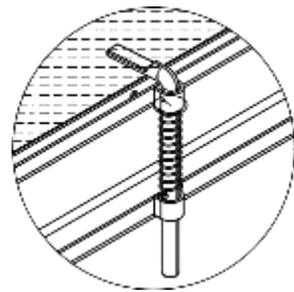


Fig 7