

# Dual-Color LED Exit Sign

Project:	
Type:	
Catalog #:	

## STANDARD



## ILLUMINATION

- Ultra-bright, energy efficient, long-life Red and Green LED.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90 minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.


## HOUSING

- Injection molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish.
- EZ snap out Chevron directional indicators.
- Compact, low-profile design.

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery pro-rated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes..
- UL listed

## DIMENSIONS

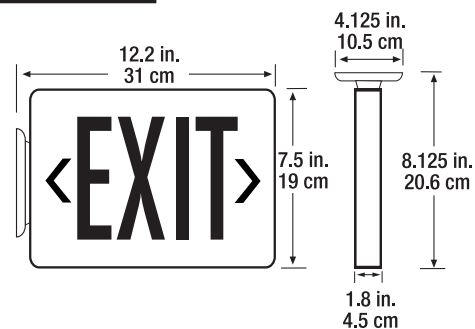

# LED Exit Sign

Project:	
Type:	
Catalog #:	

## ELECTRICAL INFORMATION

Catalog Number	Input Watts (W)		Input Amps (A)	
	120V	277V	120V	277V
<b>7097</b>	3.8	3.8	0.034	0.020