

Wellworth® Classic

Two-piece elongated 1.6 gpf toilet **K-3505**

Features

- Elongated bowl offers added room and comfort.
- Equipped with Sloan FLUSHMATE® Sloan® Valve Company.
- 1.6 gpf (6.0 lpf)
- 12" x 10" (305 mm x 254 mm) water surface.
- Left-hand Polished Chrome trip lever.

Material

Vitreous china.

Installation

- Seat and supply line sold separately.
- Standard 12" (305 mm) rough-in.

Recommended Products/Accessories

K-4636 Cachet® Quiet-Close™ elongated toilet seat K-5588 Purefresh® Elongated toilet seat

K-4108 C3®-230 Elongated bidet toilet seat with remote control

K-5420 Low-Profile Bolt Caps

Included Components

Product consists of:

4645

4303

9481-L

Additional Components:

Bolt cap accessory pack

Equipped with Sloan FLUSHMATE® – Sloan® Valve

Company

Tank accessory pack

Tank cover



Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
	0	White
	96	Biscuit
	7	Black Black™





Wellworth® Classic

Two-piece elongated 1.6 gpf toilet **K-3505**

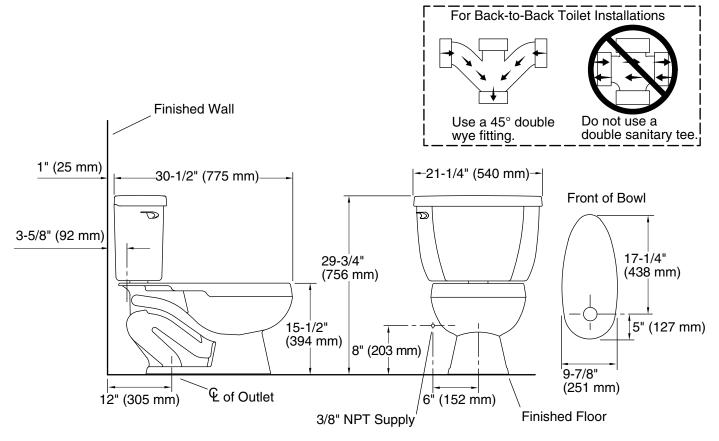

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor
Bowl shape: Elongated

Flush type: Pressure Assisted Trap passageway: 2-1/4" (57 mm)

Water Consumption

Full: 1.6 gpf (6 lpf)

Water surface size: 12" x 10" (305 mm x 254 mm)

Rim to water 5-5/8" (143 mm)

surface:

Rough-in: 12" (305 mm)
Seat-mounting 5-1/2" (140 mm)

holes:

Fixture Supply Requirements

Min static pressure: 20 psi (137.9 kPa) Max static pressure: 80 psi (551.6 kPa)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

1-800-4KOHLER (1-800-456-4537)

