

### Items you will need

- Safety glasses
- Pencil or pen
- Tape measure
- Utility knife
- Jigsaw
- Carpenter square (speed square)
- Power screw gun or drill
- Soft mallet
- Portable power saw
- Fine-tooth saw blades (40-tooth minimum, sharp carbide-tipped wood or finish/trim blades)
- Large file or medium-grit sandpaper
- Chalk line
- Spacing tools
- Fastener-specific tools recommended by manufacturer

Each Deckorators® Vault board has a unique appearance and should be arranged according to the end user's preference. Prior to construction, check with your local regulatory agency's code requirements. For best results, follow all installation instructions, paying close attention to gapping, spacing and fastener requirements.

### Joist spacing requirements

#### Installation style

|             | Standard | Picture frame | Diagonal (45°) |
|-------------|----------|---------------|----------------|
| Residential | 16"      | 16"           | 12"            |
| Commercial  | 12"      | 12"           | 12"            |

Note: All dimensions are on-center.

*Note: Always follow best workmanship practices, including, and not limited to, square cutting both board ends prior to installation.*

### Gapping requirements

#### Installation temperature

|                        | Above 32° F (0° C) | Below 32° F (0° C) |
|------------------------|--------------------|--------------------|
| Side-to-Side           | 1/8"               | 3/16"              |
| End-to-End             | 1/16"              | 1/8"               |
| End-to-Side            | 1/16"              | 1/8"               |
| Abutting Solid Objects | 1/8"               | 1/4"               |

1X6-16' GR. DKR.




End Tag




Product Sticker

SIDE VIEW


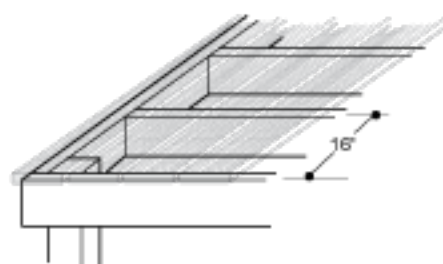


Standard

TOP VIEW

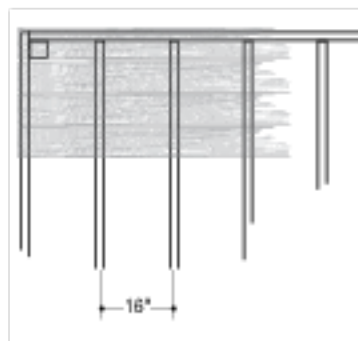

Picture frame

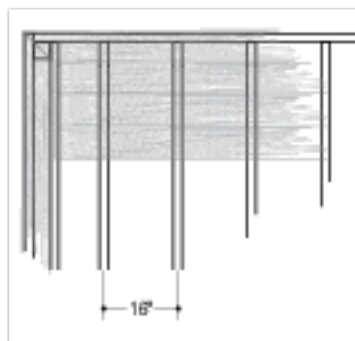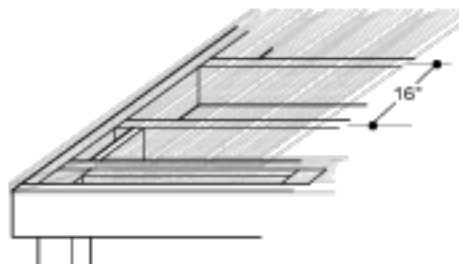

Diagonal

