

User's Manual







BEFORE INSTALLATION

► Installation Environment


- 1. Before installation, confirm whether the inlet pipe and angle valve are correc, Make sure that the installation is completed, and the water has been flushed to ensure that there is no impurities in the water inlet pipe;
- 2. Water inlet pressure requirements: 5bar≥ inlet pressure ≥0.5bar, it is recommended to install a pressure reducing valve if it is greater than 0.05MPa;
- 3. When installing and using the faucet, please use normal torque to prevent the handle from breaking.
- 4. If the customer goes out for a long time or does not use the faucet for a long time, please close the faucet valve and turn on the faucet switch to release the pressure and water in the faucet.

► Installation Aids

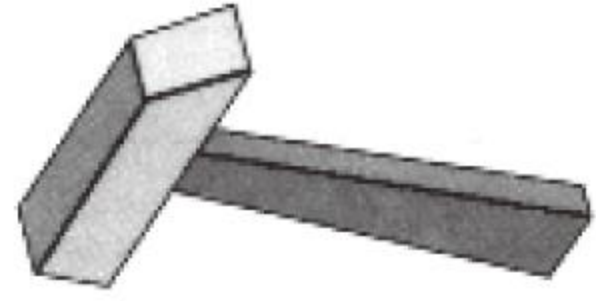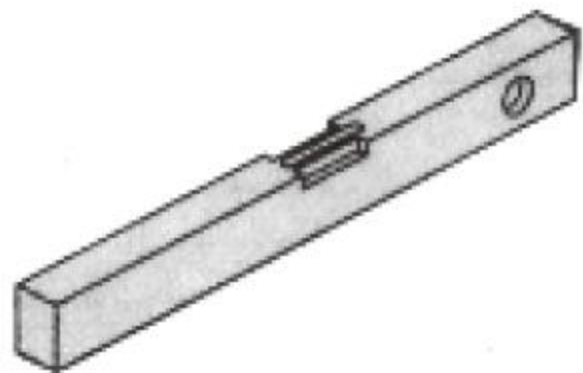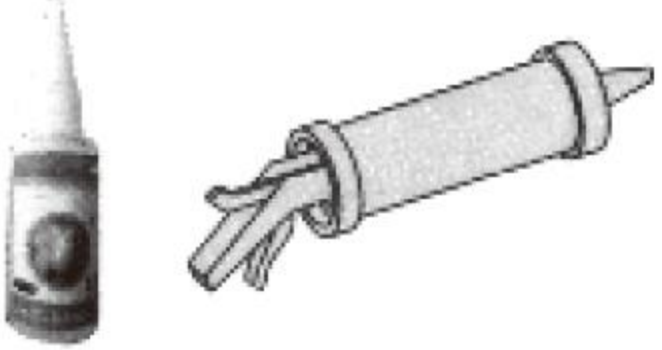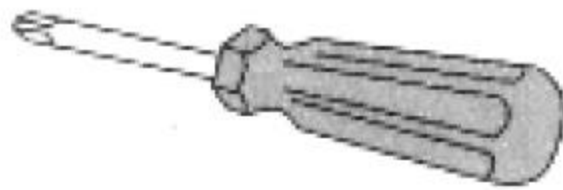 Hammer	 Spirit level	 Adjustable wrench
 Glue(do not use glue containing acetic acid)	 Impact drill	 Screwdriver

► Parts List

NO.	Item	Qty	NO.	Item	Qty
1	Pre-embedded body	1	8	Washlet	1
2	Protective cover	1	9	Installation Manual	1
3	Connectors	2			
4	Bathtub body	1			
5	Screw packs	1			
6	Hose	1			
7	Shower seat	1			

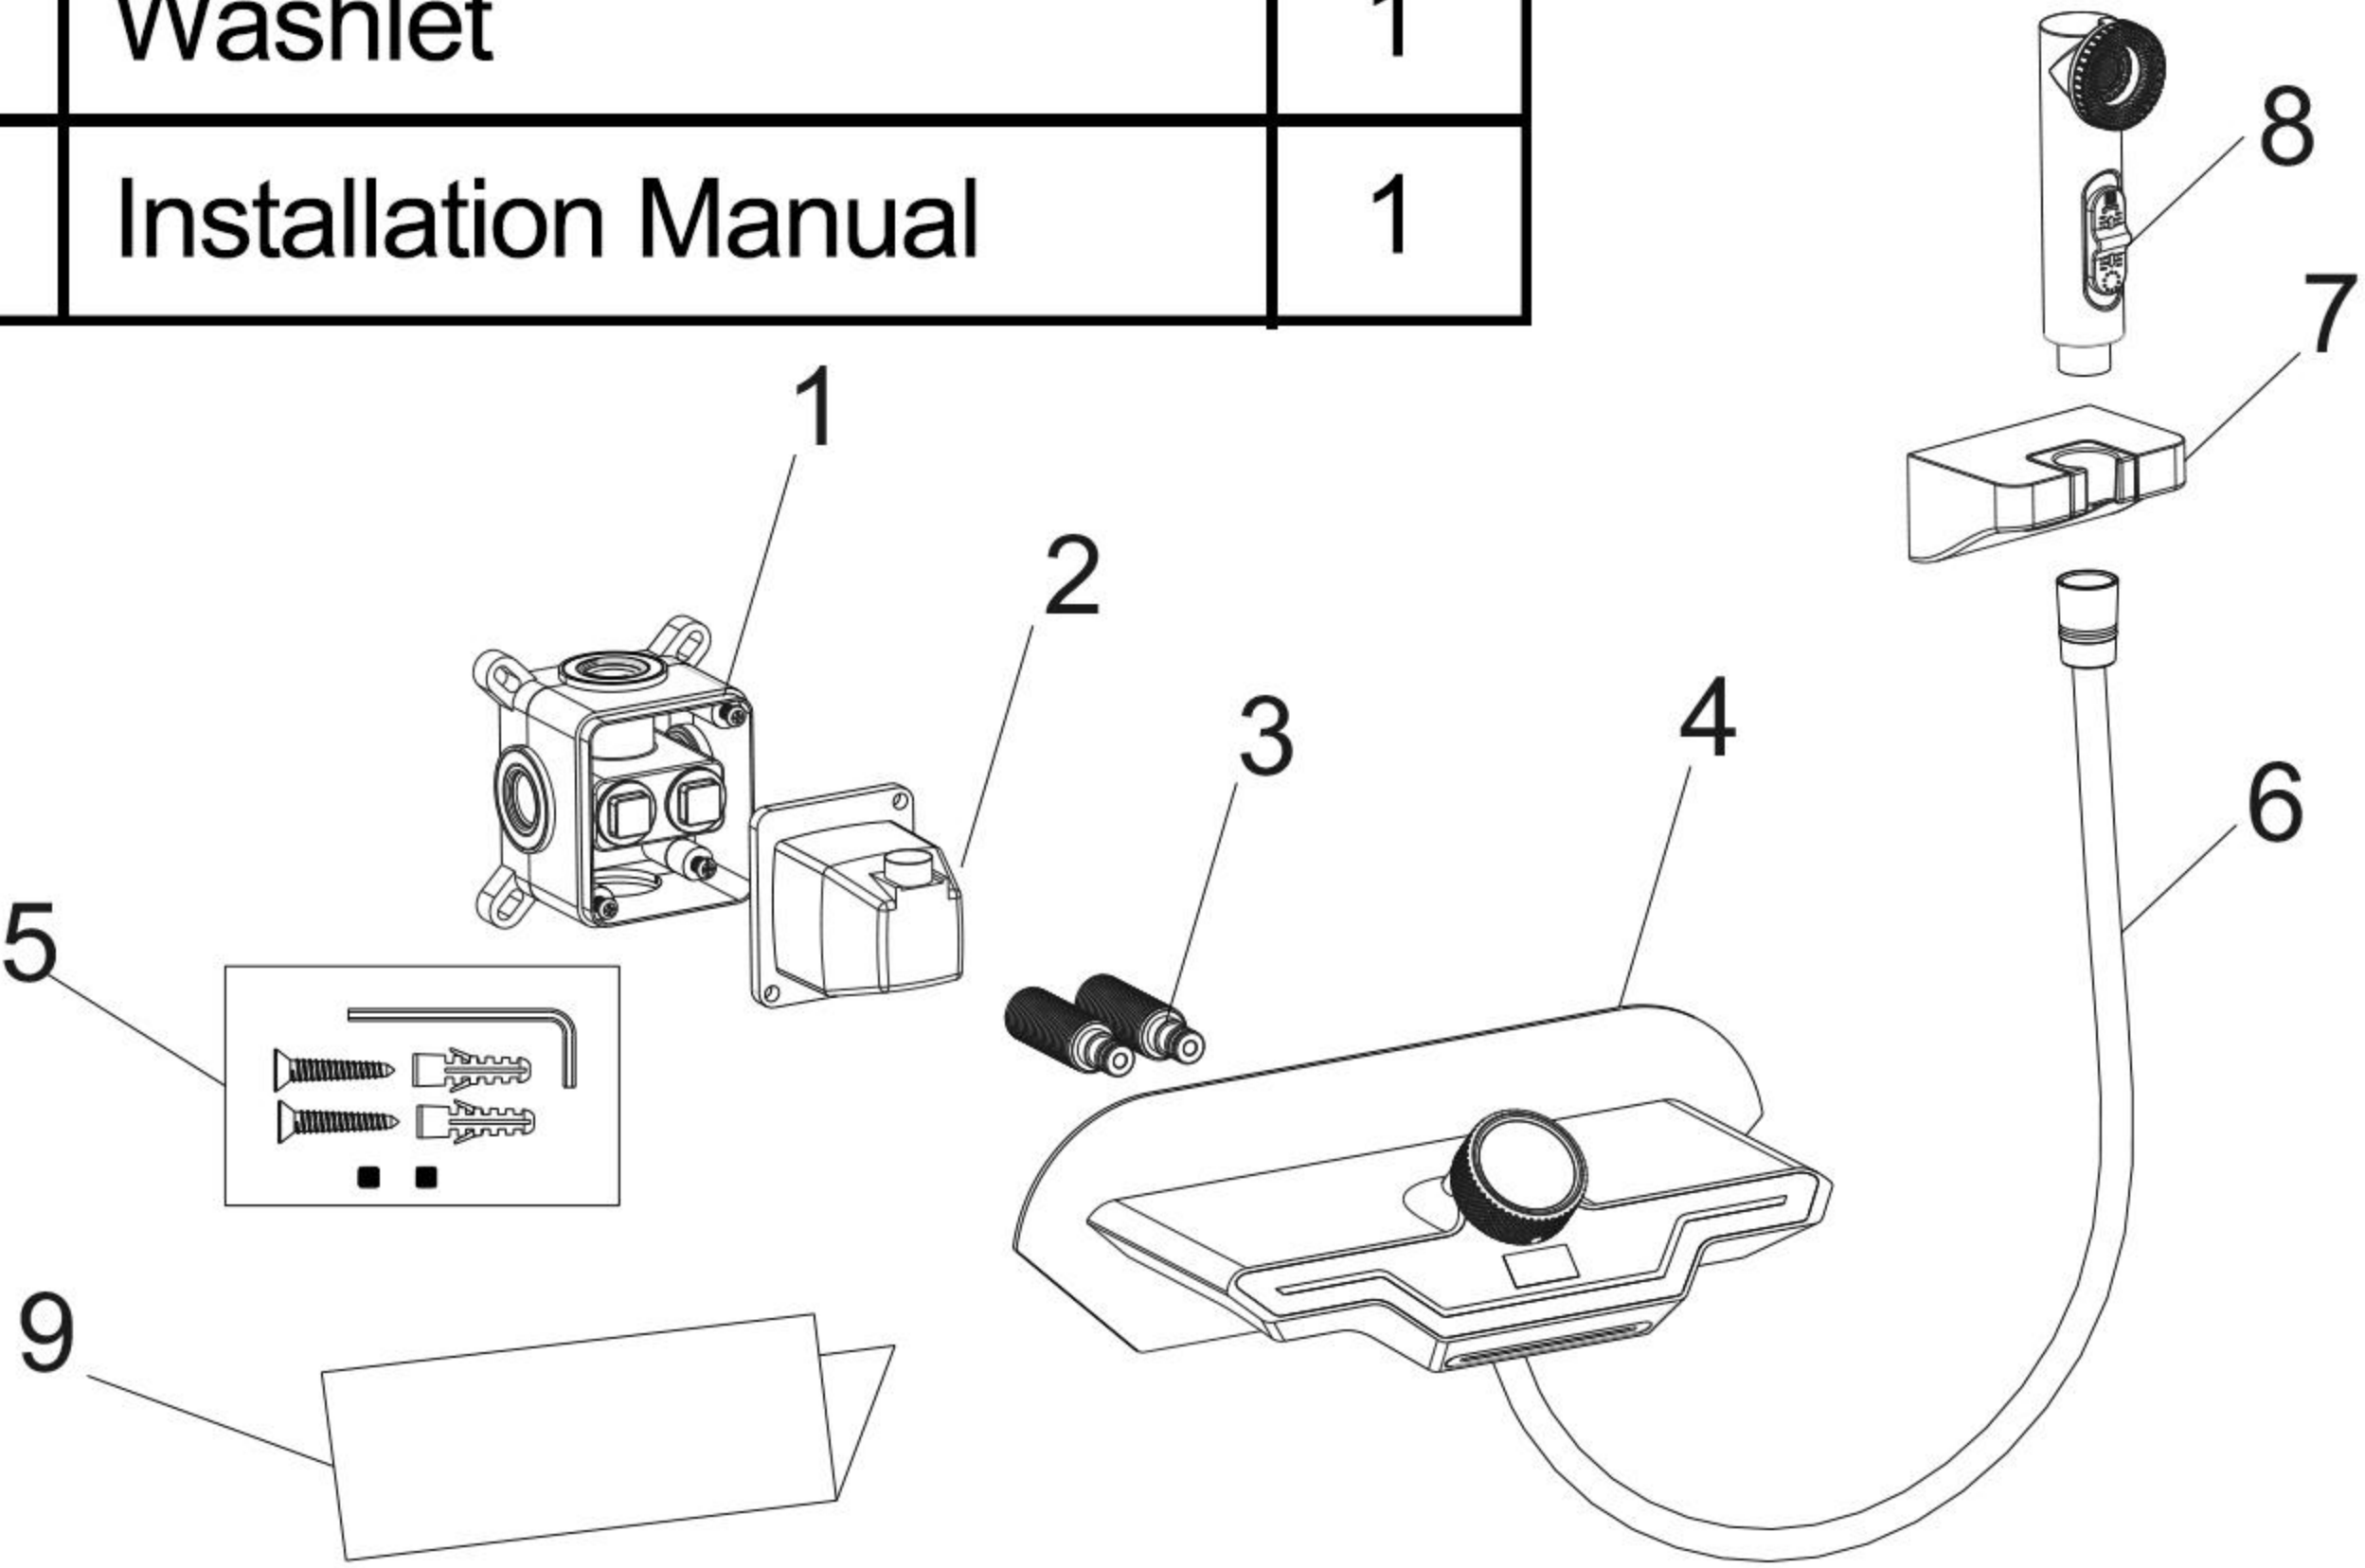

Check accessories


Standard List of Accessories:

When you open the product packaging, please check whether the objects in it are consistent with the main body and accessories you purchased. If there is any inconsistency, please contact our company or our distributor.


- Note: 1.Accessories are subject to change without prior notice if the change does not affect usage;
2.The appearance of the product is subject to the physical objects you receive, and the schematic diagram is only for reference.

INSTALLATION STEPS

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.

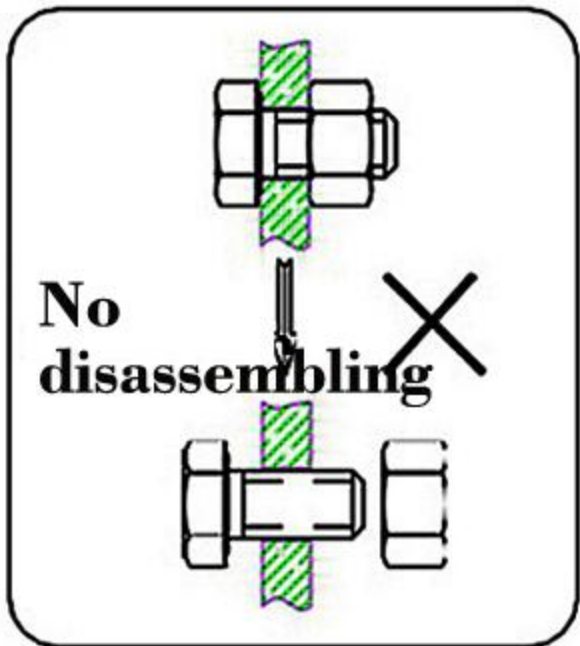


Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.

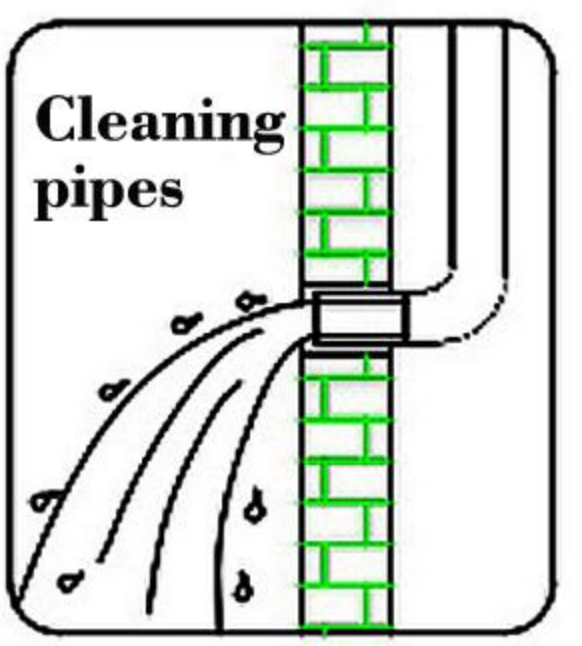



Pre-embedded procedures

1. Pre-embedded box connection, hot and cold water pipes must pay special attention to; left hole cold water, right hole hot water.

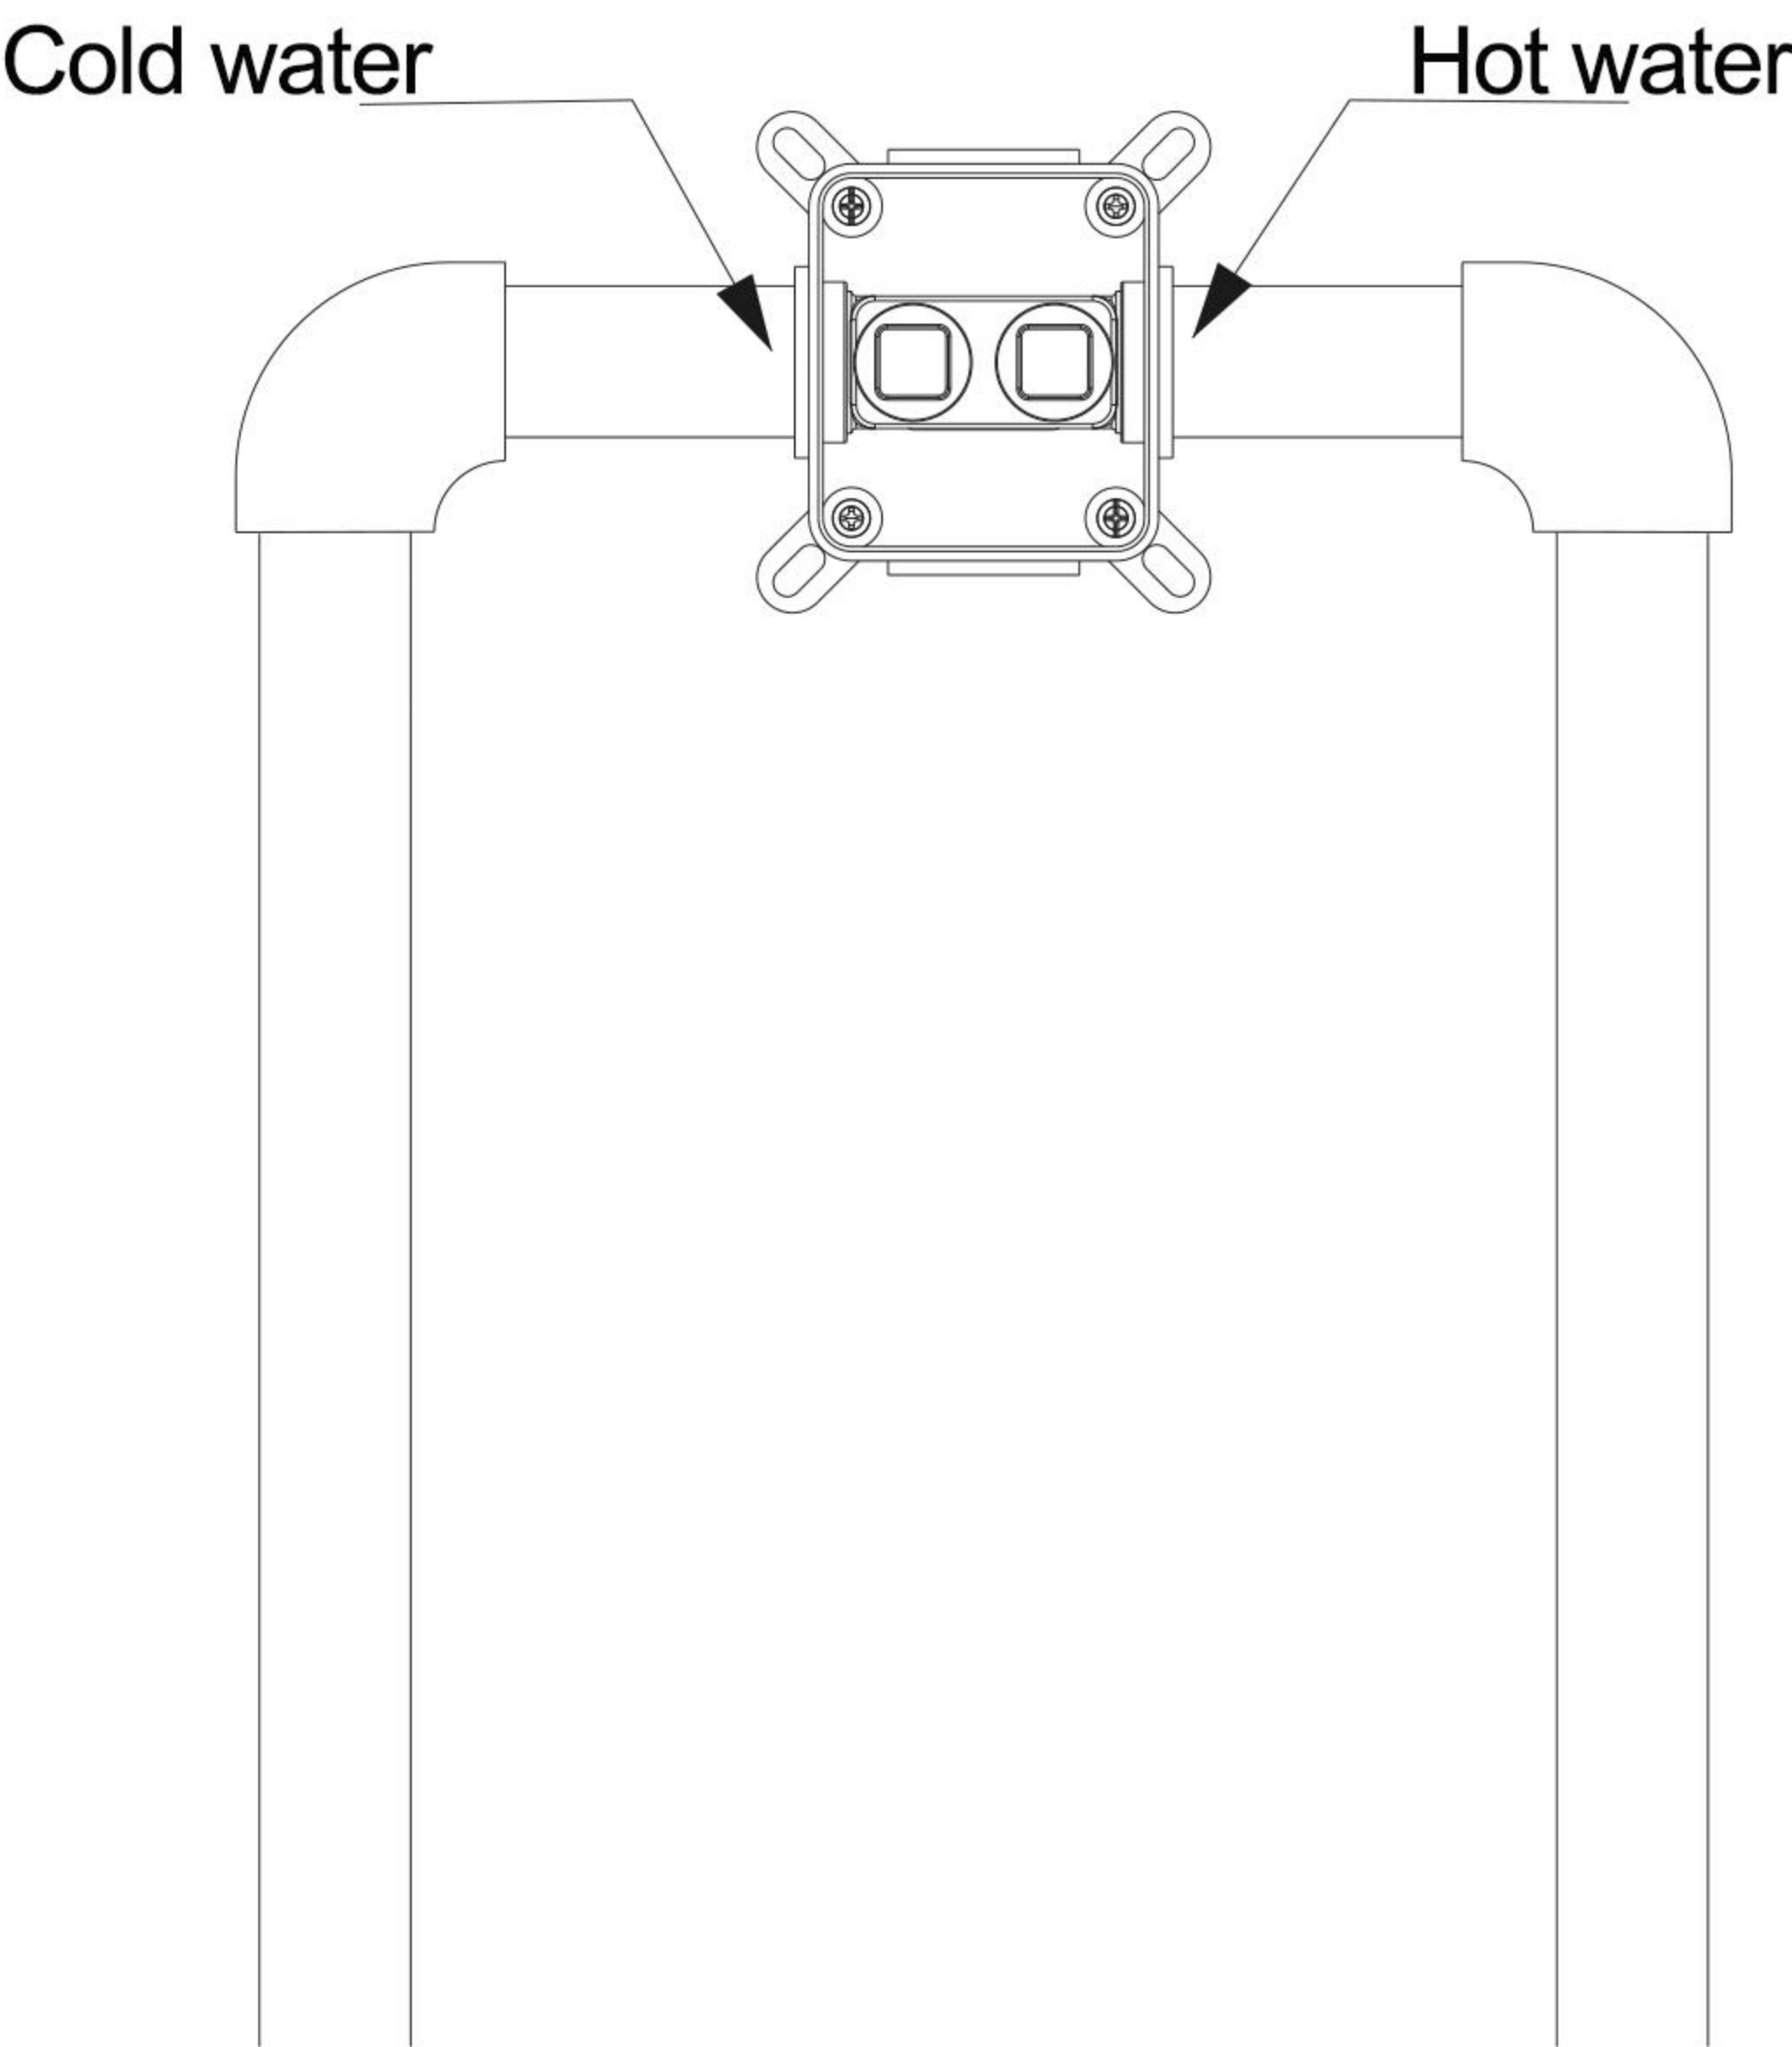


Pre-embedded body open wall size

The open wall size of the pre-embedded box is 95MMX110MM.
Note: the pre-embedded box needs to be flush with the tile surface

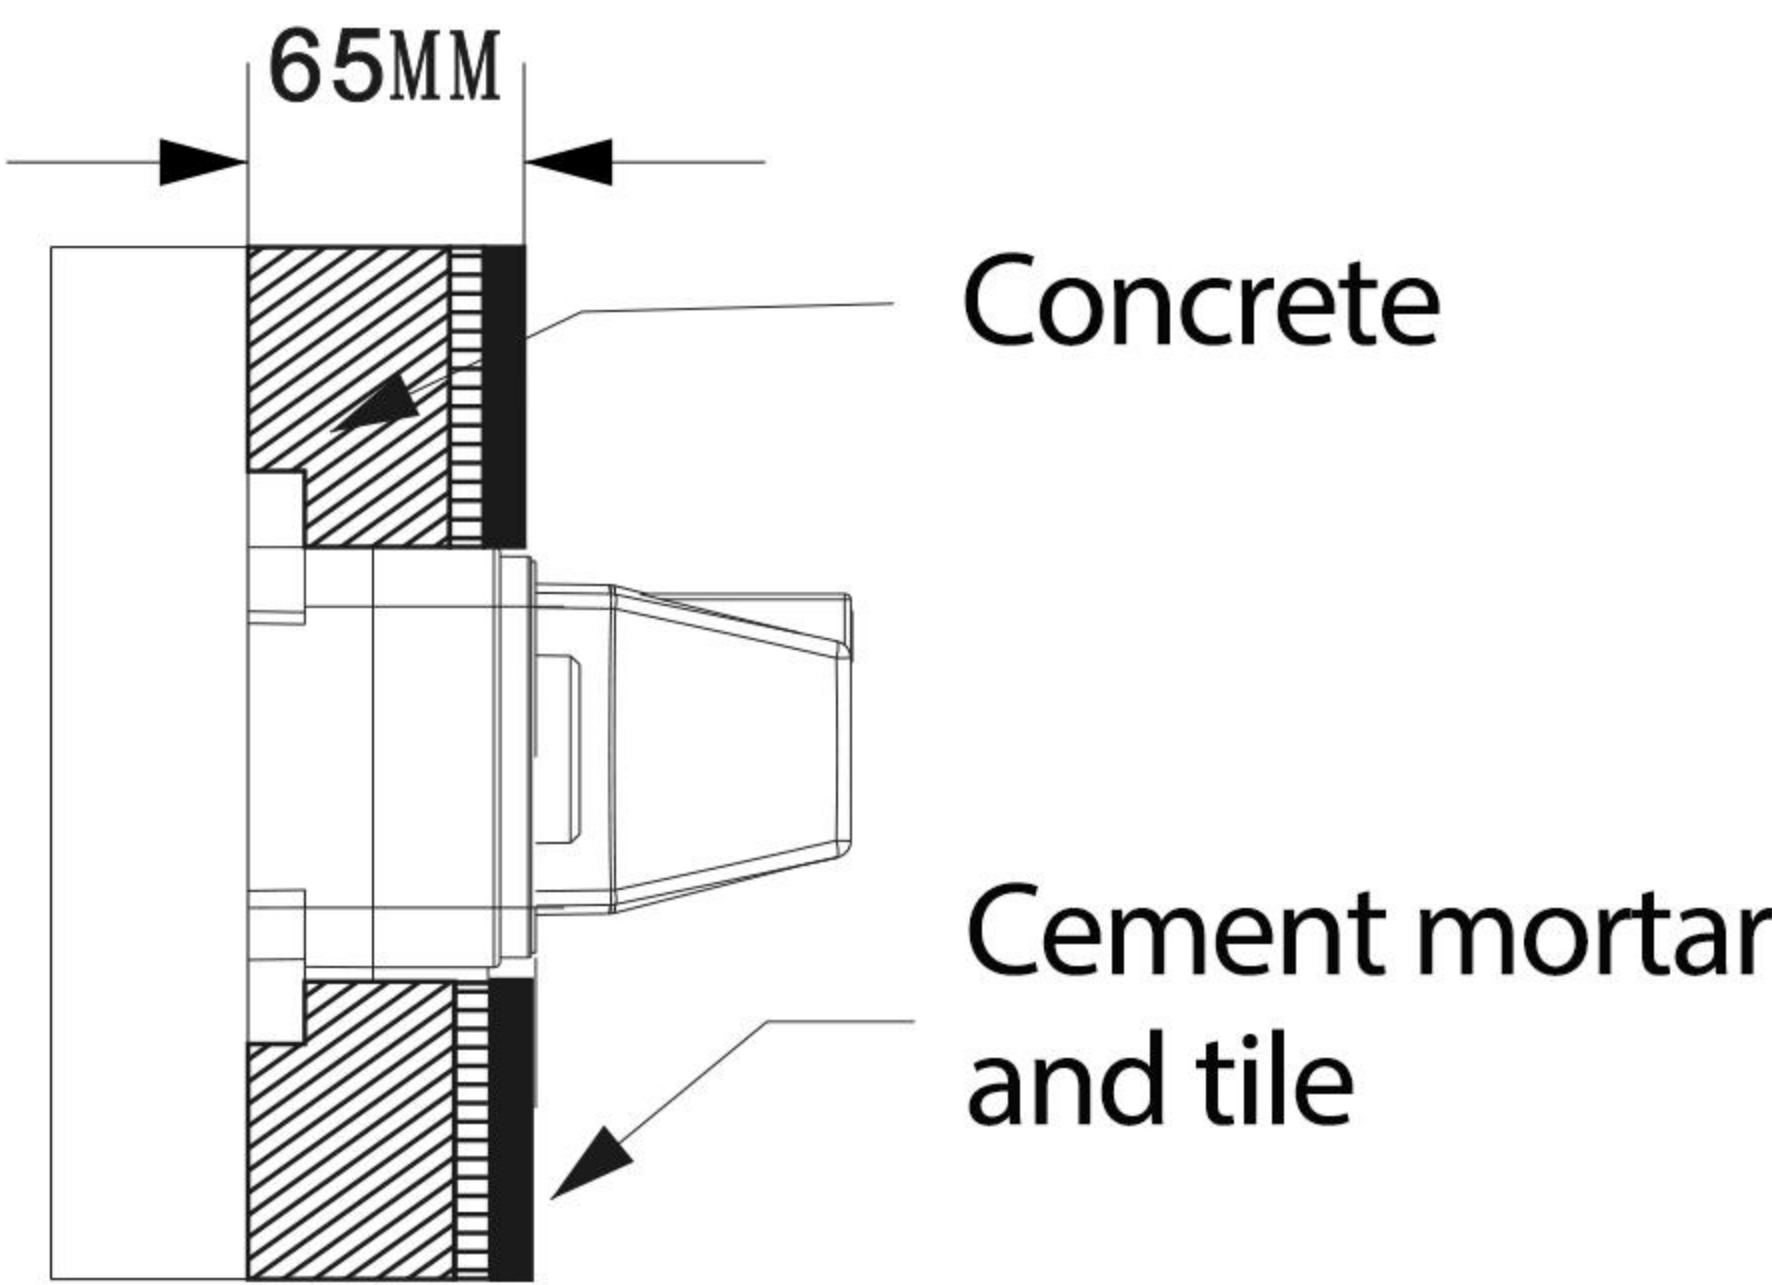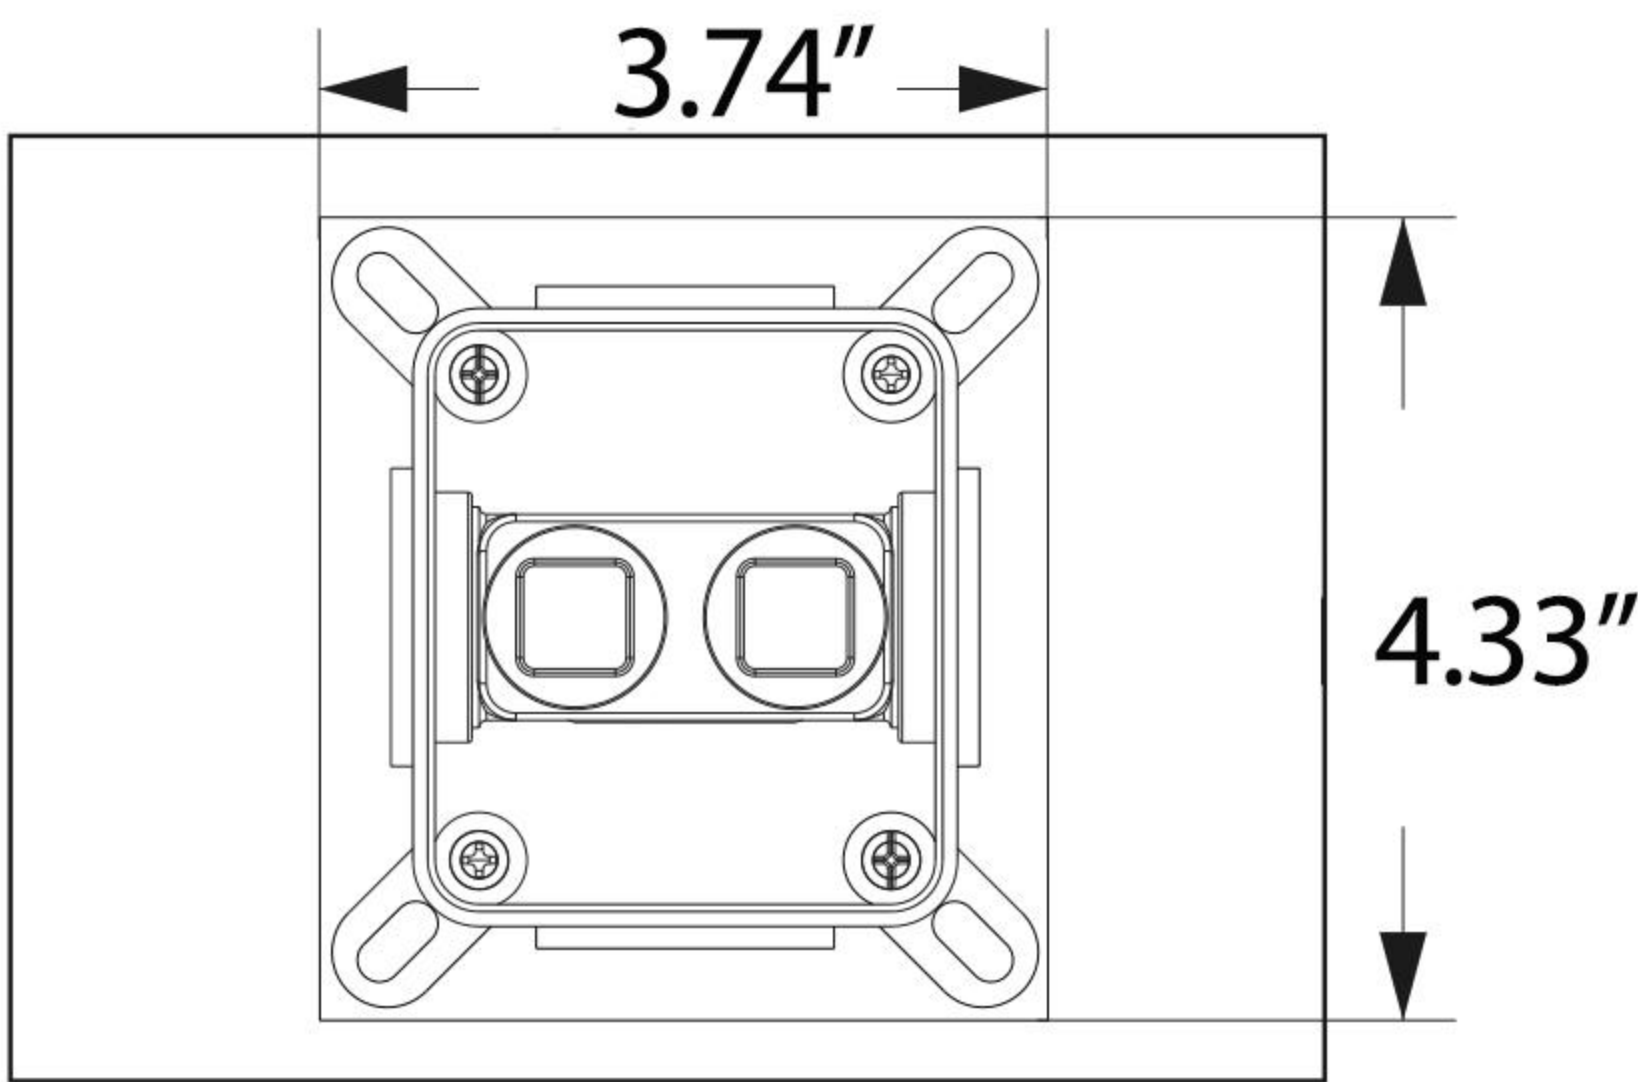


Connection of bathtub faucet

1. According to the basic size of the product, refer to the figure below to open the wall and dig the main buried port as well as the hot and cold water pipe inlet.
2. Link the cold and hot water inlet pipes with the pre-embedded box and tighten them with a spanner to fix them.
Note: The main body is recommended to install the height of 90MM specific height needs to be based on the actual bathtub height to confirm.

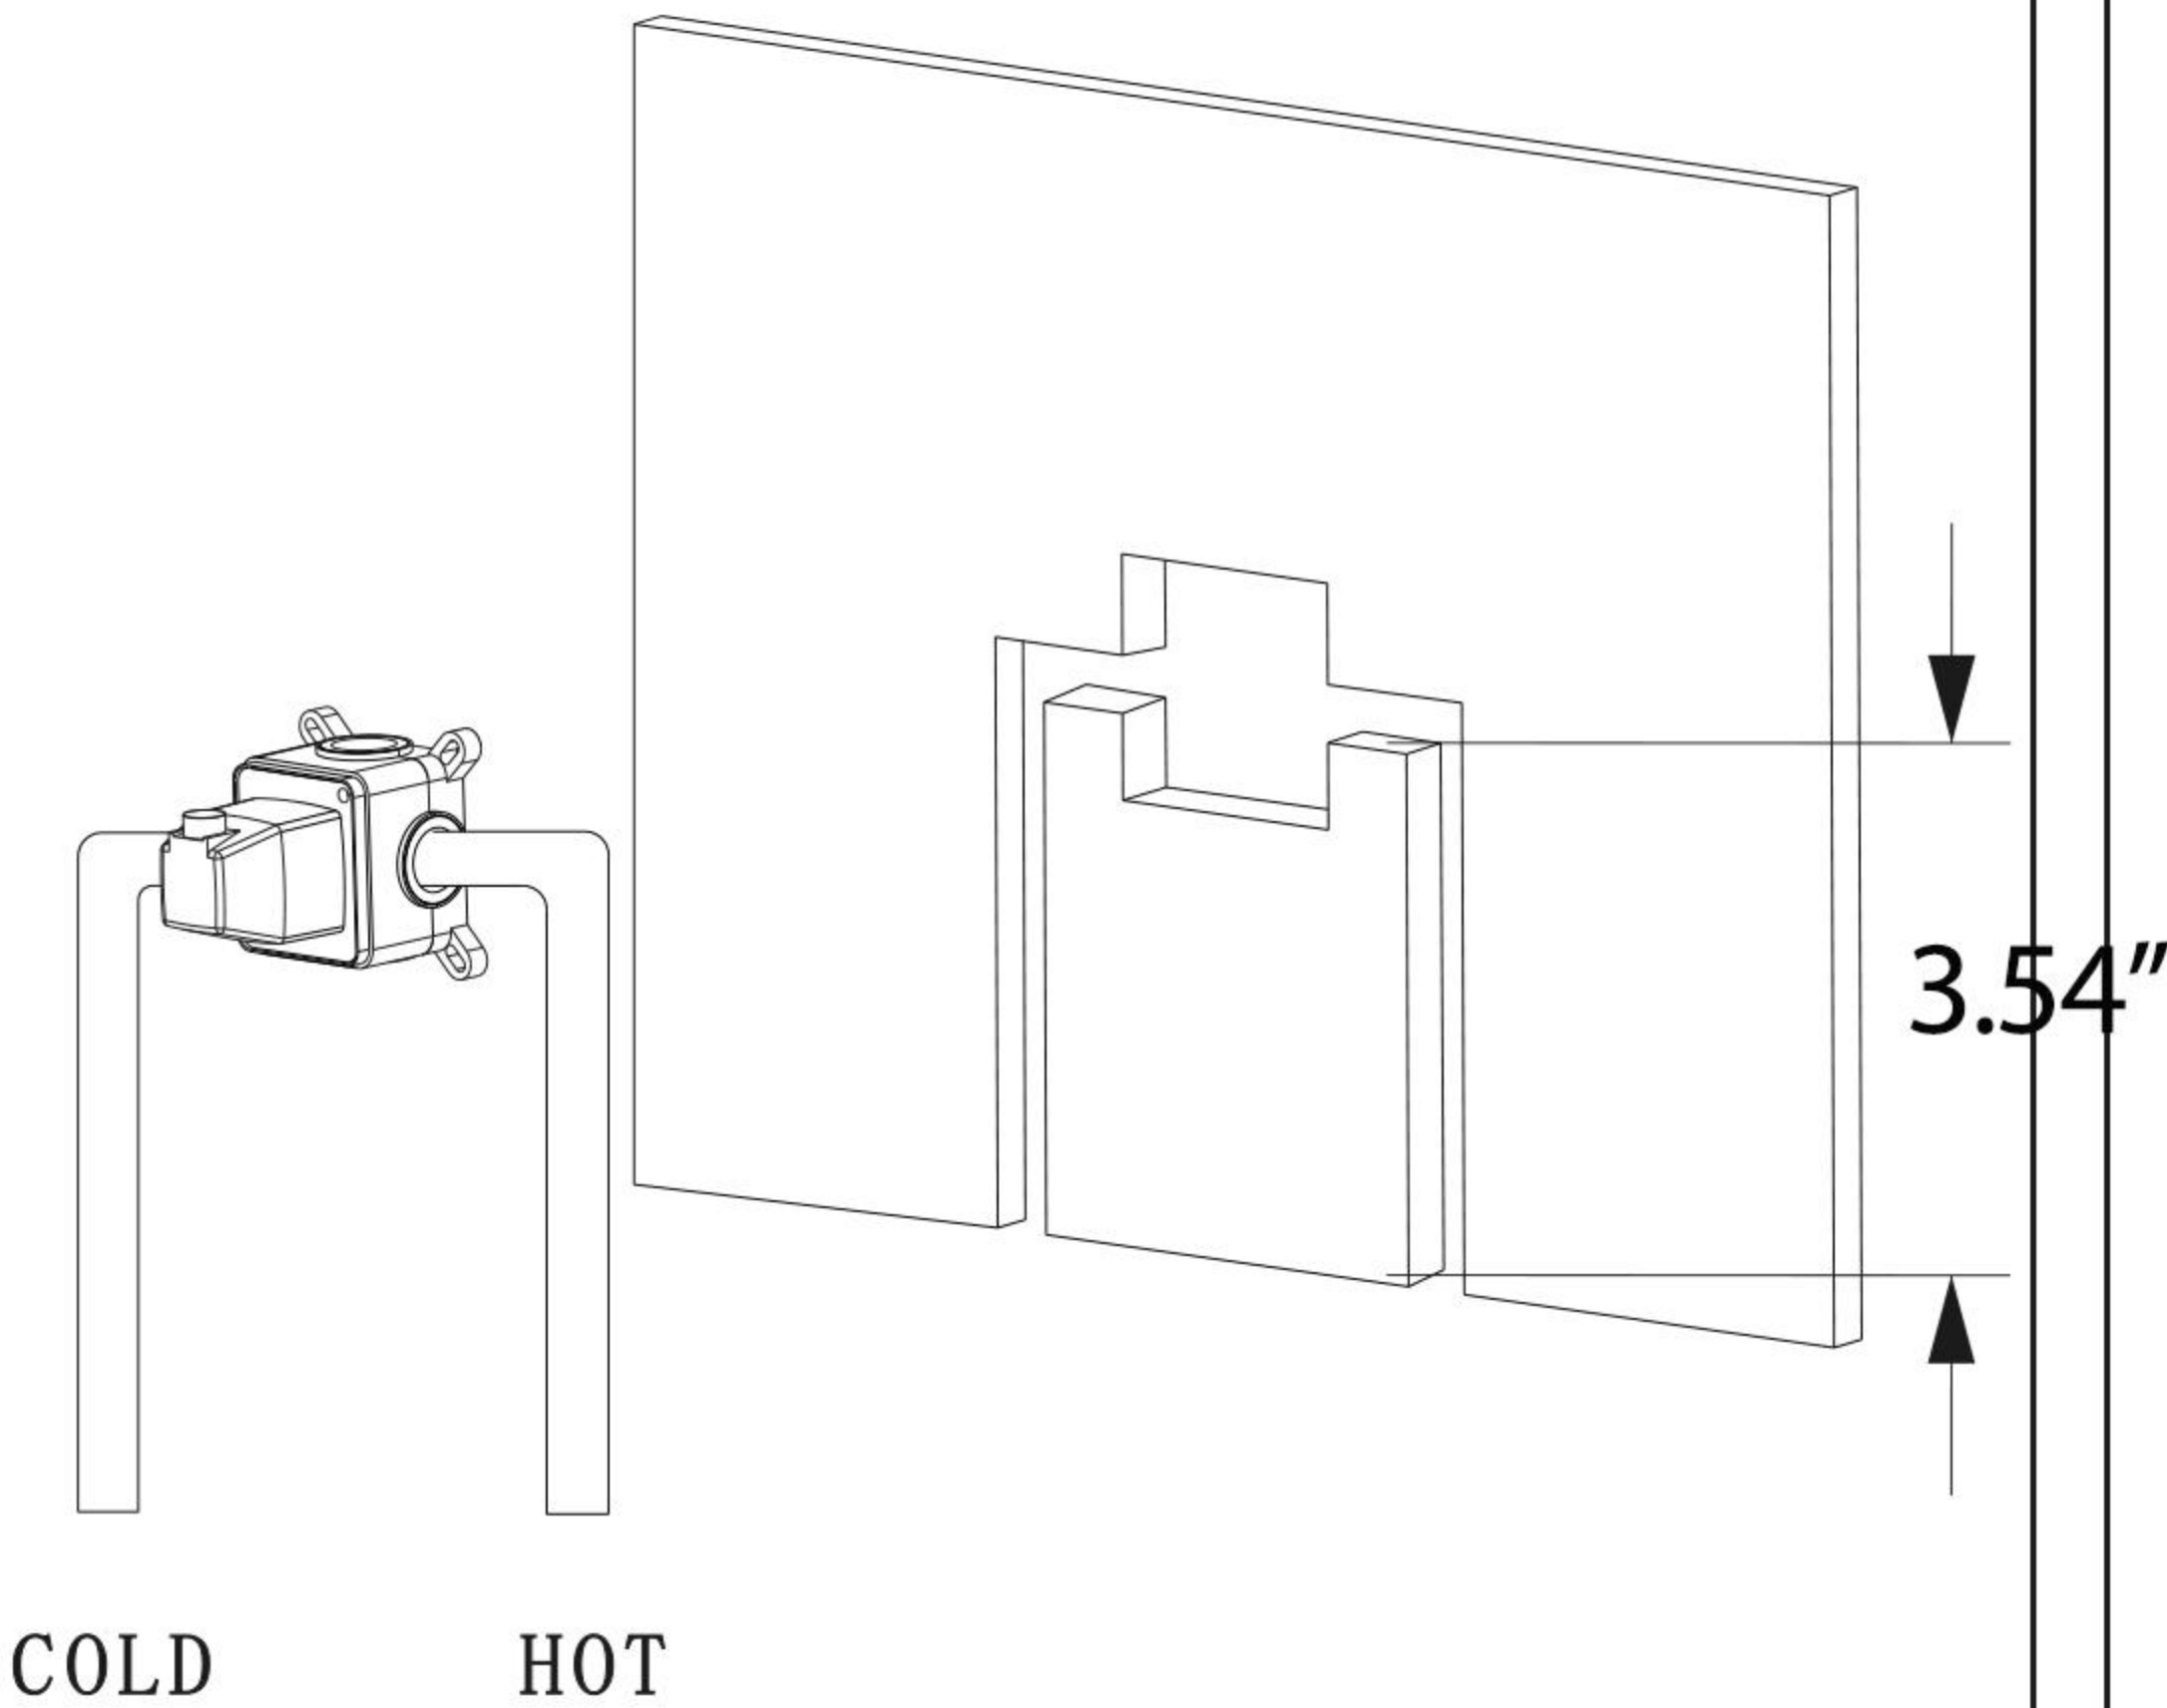

Water test and sealing test


Purpose: To flush out the magazines and sludge in the pipeline to avoid clogging and affecting the water function.
1. Open the pre-buried box cover, remove the outlet of the white I move the female via Yakusen limit white was dyed loan fall, and then rinse the pipeline: and then turn on the water.
2. After the sealing test, please put the protective mask as it is.

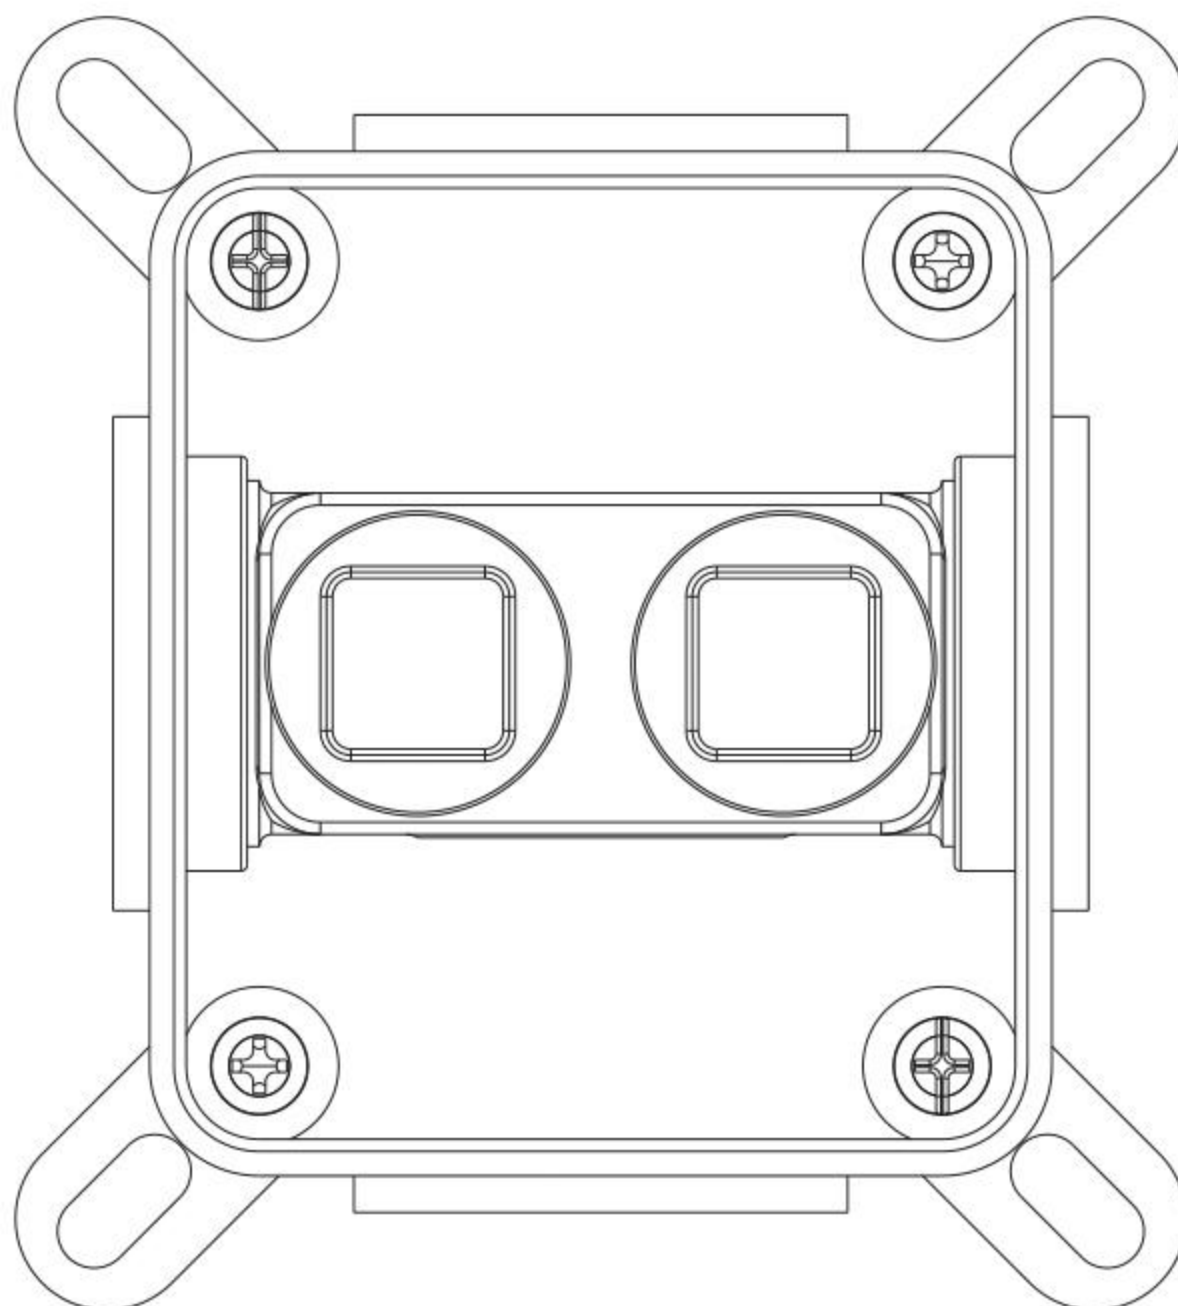

INSTALLATION STEPS


Sealing procedure

1. Measure the pre-embedded box parallel and perpendicular to the wall with a balancing ruler, if the wall is not level, the then it can be repaired to ensure that the angle between it and the vertical wall is close to 90 degrees at the maximum, so as to facilitate the later laying of tiles for decoration.

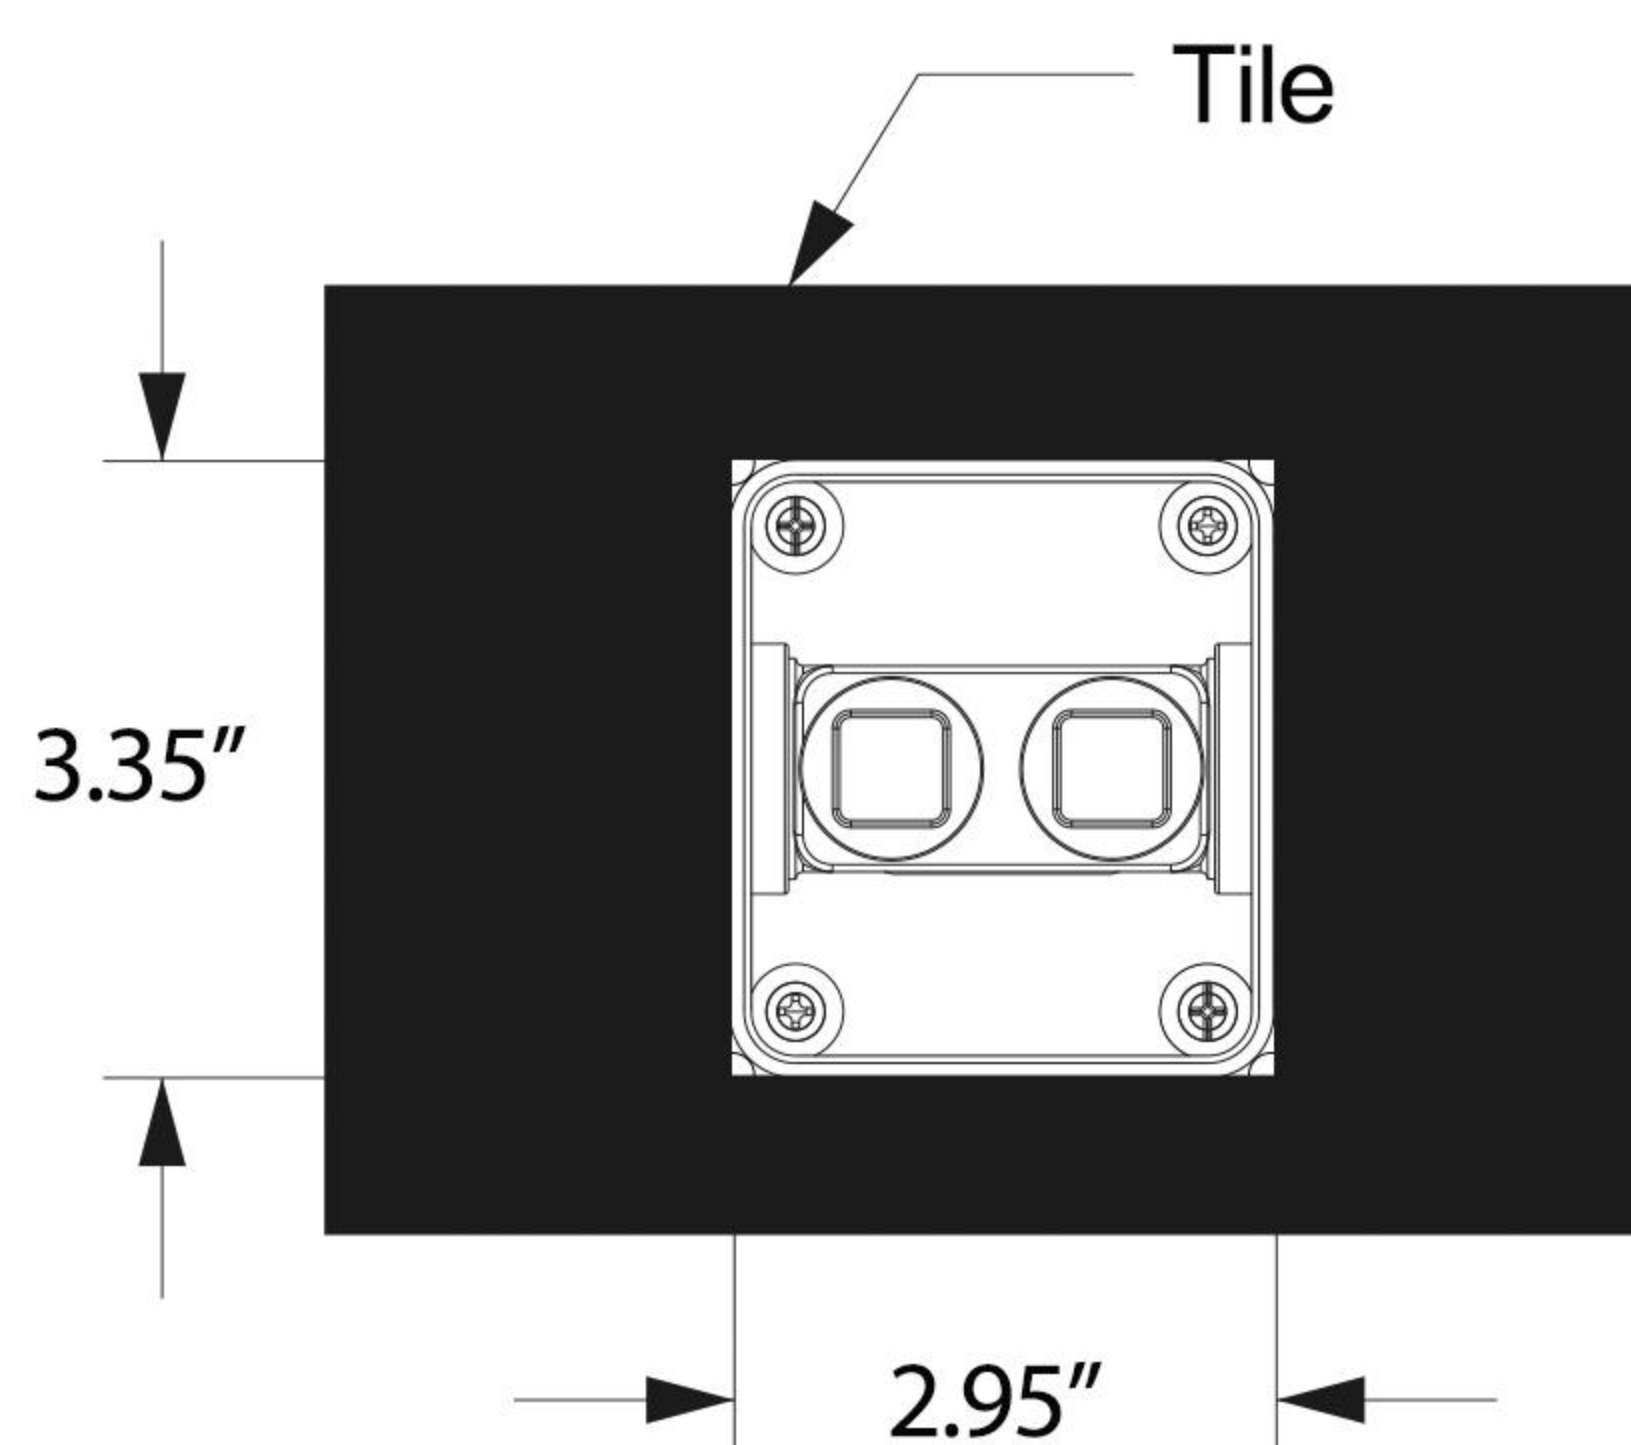

Installation procedure

1. Remove the shield and the white plug of the main body outlet.
2. Install the decorative panel on the main body, close to the wall.
3. Add the tape on the spout connecting rod (112 teeth) and connect the descent spout with the spout, and screw the hexagonal screws as shown below

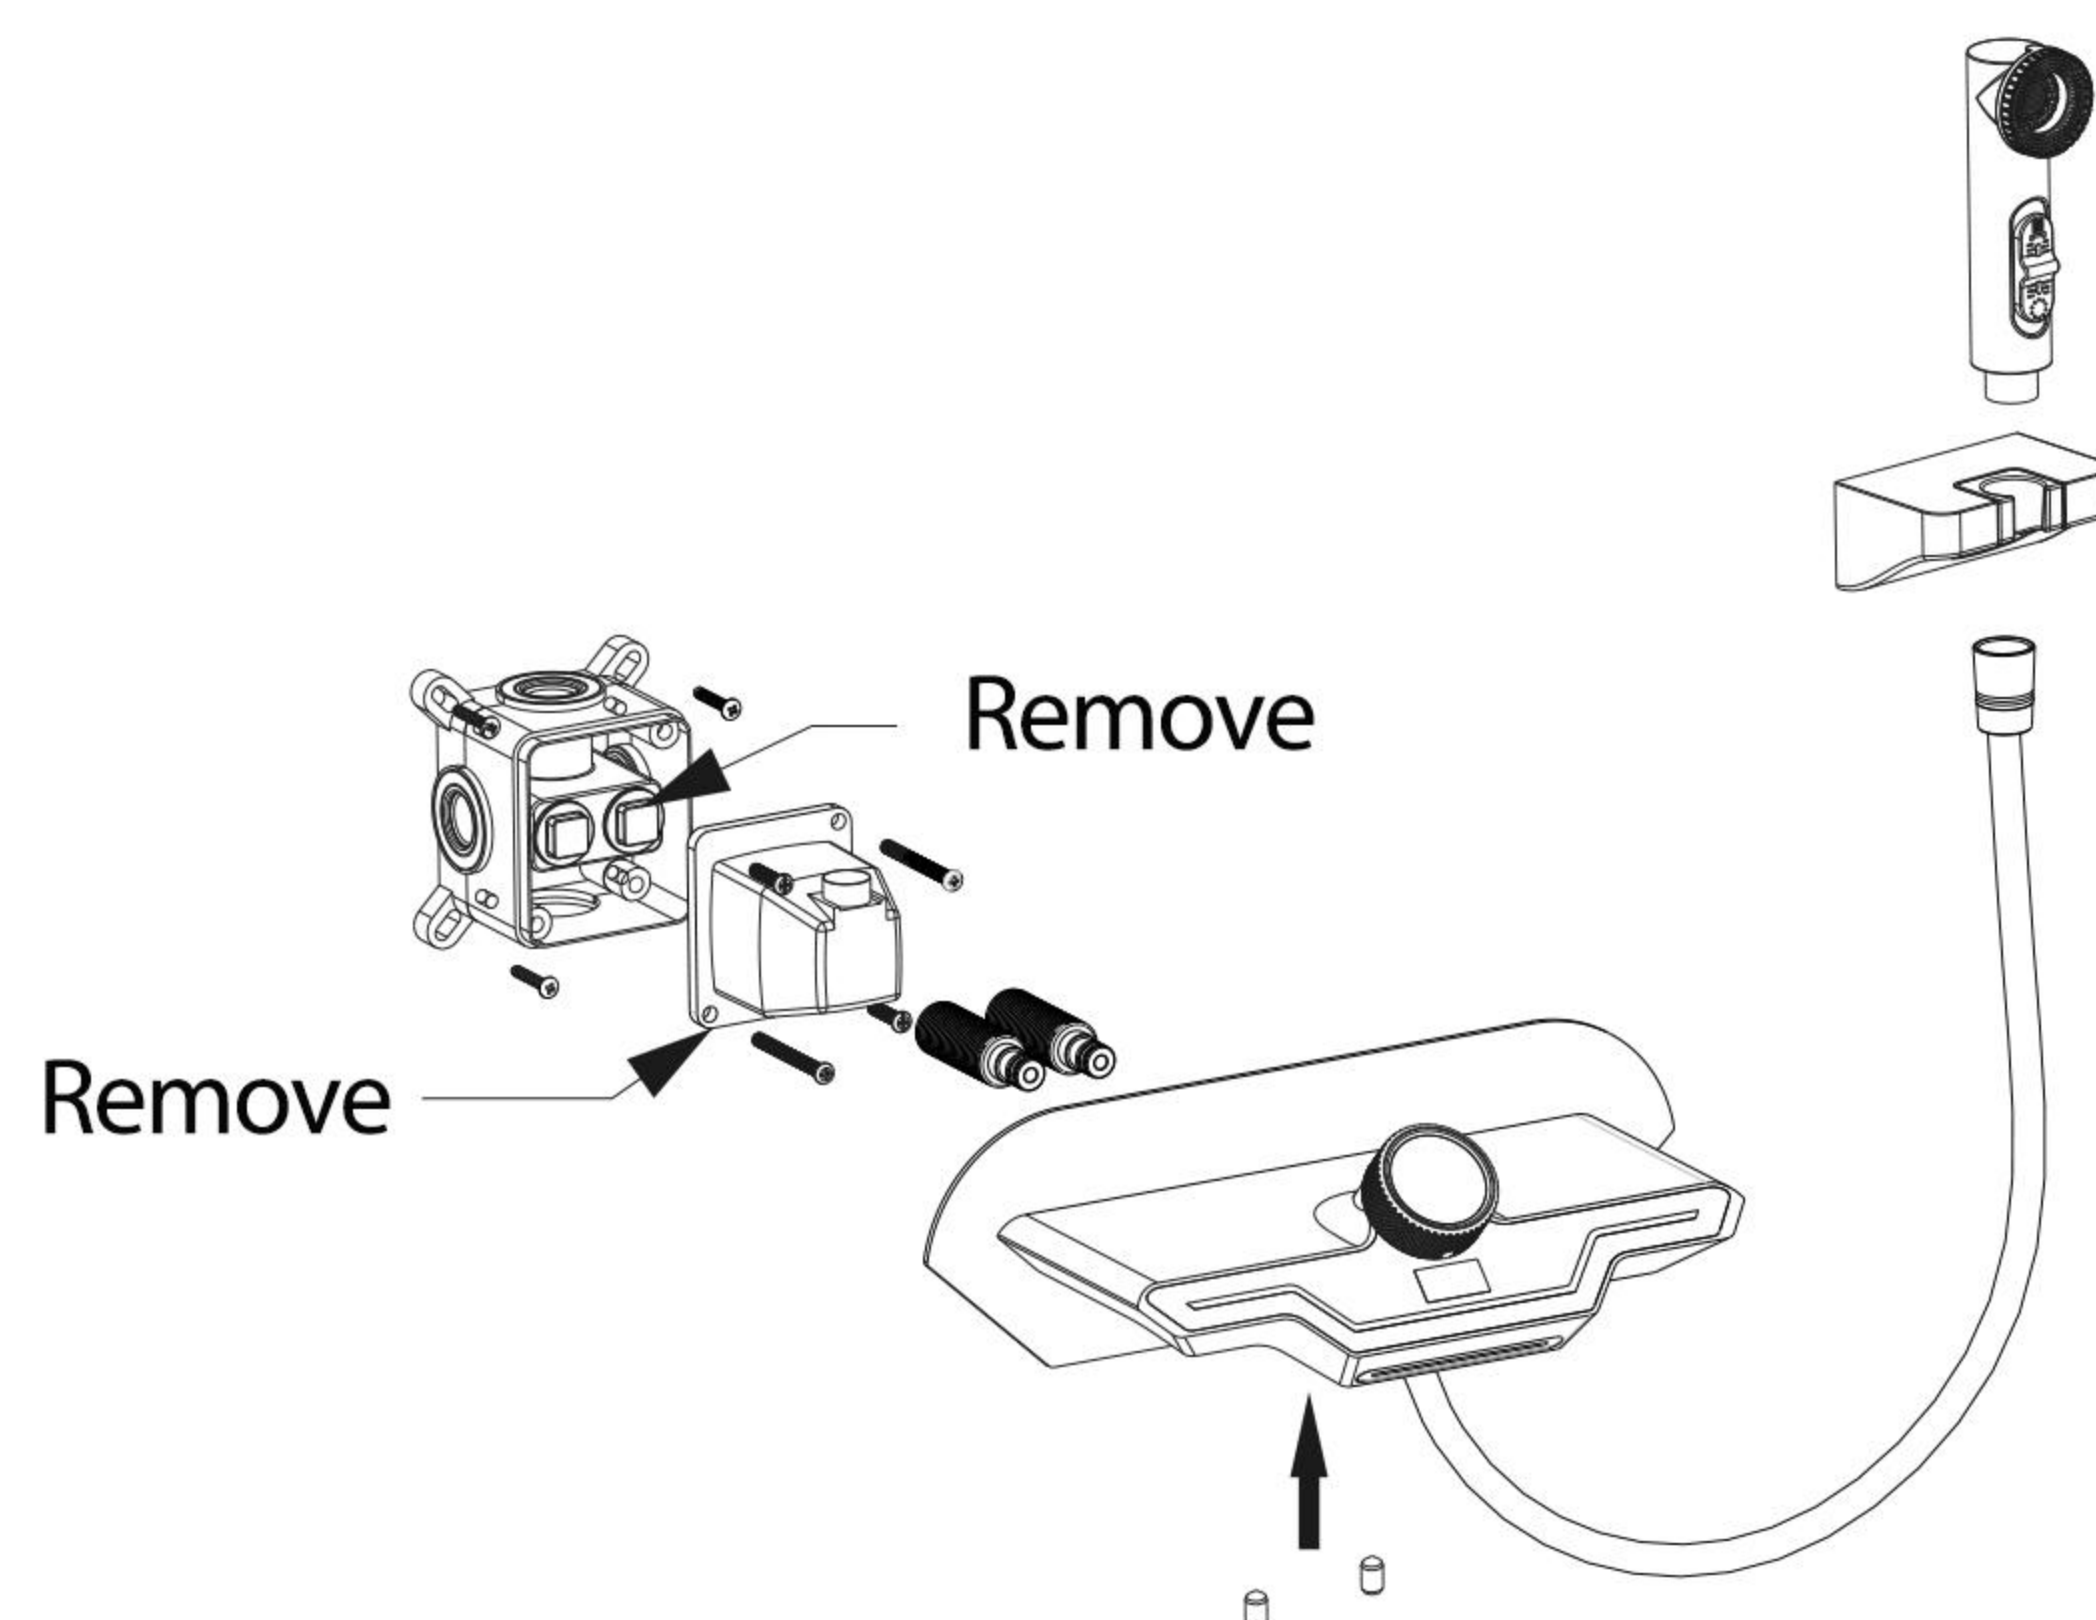

INSTALLATION DIMENSION



CLEANING CARE

In order to keep the appearance of faucet clean,bright and good performance, please take care of the faucet as follows;

- 1.Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner,or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.



Please feel free to contact us if you have any questions. We will help to solve the issue together with you.

