

PARTS & ASSEMBLY SHEET

Fixture Name: SMYTH 2073-3P GMT

This fixture assembled PO:_____Date:____


Notice: Please review the Parts List and check for all parts before assembling the fixture. If any parts are missing or damaged, please note on this sheet and contact the place of purchase to arrange for replacement parts.

PARTS LIST Company Name: Co Account#: below to be filled out by retailer					
Mounting Strap 3/4"*1" 1ea	99,00	Green Screw G8/32*H8 mm 1ea		Mounting Screws H32 mm 2ea	<u>шшш</u>
Wire Connectors Orange 3ea		Hex Nut G3/8*H4 mm 2ea		Top Loop 57*65 mm 1ea	Θ
Tube Φ22*50mm 3ea		Nipple 3/8"*H45MM 1ea		Canopy 1ea 126*126*H25MM	
Chain 1ea 6FT*Ф4.2mm		Threaded Ring 1ea Ф23-16T*H5mm	<u>[[]]]</u>	Screw Collar Loop 1ea 3/8"*H42.4mm	
Chain Connector 2 ea Ф4*H55mm					
Part Needed Quantity					
Part Needed	Quantity				
Reason why (missing, scratched, broken glass, bent, bad finish)					
Comments					

FIXTURE ASSEMBLY INSTRUCTIONS Read and review installation instruction sheet before assembling the fixture

- Feed the fixture wires through Rod (V) to Center Rod (K) and connect the rods well.
- 2. Hook the top of Center Rod (K) to the Top Loop (J).
- 3. Connect the Top Loop (J) to the chain.
- 4. Hook Hanger Rods (R) to the Frame (S), then hook the top of Hanger Rods (R) to the Top Loop (J).
- 5. Slide the Candle Sleeves (U) over the sockets.
- 6. Slide Glass Shades (T) onto the lamp fitters.



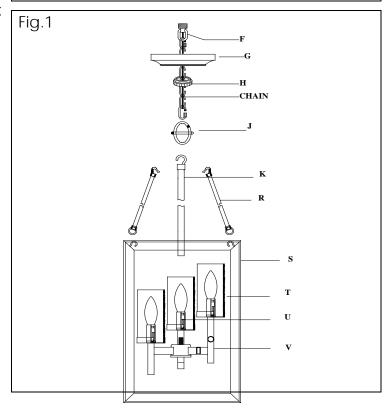



INSTALLATION INSTRUCTIONS

Fixture Name: SMYTH 2073-3P GMT

For Chandelier Light Fixture

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

HANGING THE FIXTURE (Fig.1)


- Carefully remove the new fixture from the carton along with the yellow bag that holds all parts. Check that all parts are included as shown in the illustrations and Parts and Assembly Sheet.
- 2. Shut off the power at the circuit breaker and remove the entire old fixture from ceiling, including the old mounting strap.
- 3. Thread Nipple (C) into Canopy Loop (F) until snug.
- 4. Thread the other end of Nipple (C) with Canopy Loop (F) attached into Mounting Strap (D).
- 5. Place Lock Washer (B) over end of Nipple (C) protruding through Mounting Strap (D) and thread Hex Nuts (A) onto nipple (C) until tight.
- 6. Take this mounting strap assembly and mount to ceiling junction box with junction box screws (E). Tighten screw securely with screw driver.
- 7. Unscrew the Canopy Loop Collar (H) from Canopy Loop (F). Take the Canopy (G) and pass over the Canopy Loop (F). Approximately one half of the Canopy Loop (F) exterior threads should be exposed. Adjust until desired height is reached. The Canopy Loop Collar (F) should fit snugly on the Canopy Loop (F) after the Canopy is installed. Remove Canopy (G) and Canopy Lock Collar (H)
- 8. Assemble the fixture and have an assistant or a secure support to hold the weight of the fixture while you complete the wiring connections.
- 9. Thread the fixture wires and ground wire of the assembled fixture through the chain loops, Canopy Loop (F), Nipple (C) and into the Junction Box.


CONNECTING THE WIRES (Fig.2)

- 10. Attach the power supply wires to the fixture lead wires by connecting BLACK to BLACK (or SMOOTH) and WHITE to WHITE (or RIBBED).
- 11. Ground wire connection: Connect fixture's ground wire to supply ground wire (this usually has green insulation) with wire connector. If there is no supply ground wire at the ceiling junction box then attach fixture ground wire securely onto green grounding screw that is located at the mounting bar.

NOTE: Twist the wires together in the same direction you twisted the wire connector onto the wires.

- 12. Tuck these wire connections neatly into the ceiling Junction Box.
- 13. Raise Canopy (G) to the ceiling and secure it in place by tightening the Canopy Loop Collar (H) into the Canopy Loop (F).
- 14. Install the light bulbs and glass shade as per the Parts and Assembly Sheet.

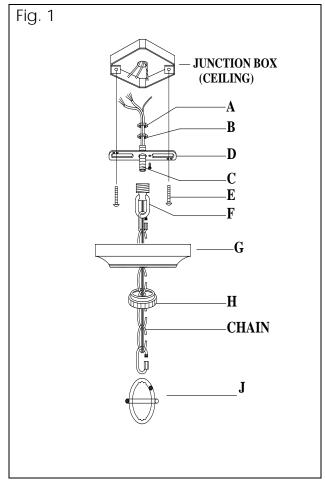

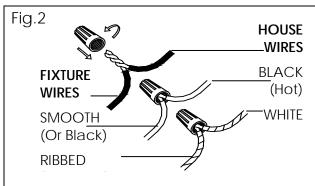

YOUR INSTALLATION IS NOW COMPLETE. RETURN POWER TO THE JUNCTION BOX AND TEST THE FIXTURE