

Commercial Sink Instruction Manual

Product ID. QNFQK



Scan for Support
support@garvee.com



GARVEE.com

Commercial Sink Instruction Manual

47*20*37inch




Product Components

<p>Short screw 4pcs</p>	<p>Wrench 1PC</p>	<p>Pool body 1PC</p>	<p>Pool chassis 1PC</p>	<p>Long Sink leg 4pcs</p>
				
<p>Faucet sleeve box 1set</p>	<p>Black gravity ball, in the faucet sleeve box 1PC</p>	<p>White transparent washer, in the faucet sleeve box 1PC</p>	<p>Yellow metal washer, in faucet sleeve box 1PC</p>	<p>Drainage pipe set 1set</p>
				
<p>Water outlet,in the drain pipe set</p>	<p>Drain pipe, in the drain pipe set 1pc</p>	<p>Yellow metal nut,in the drain pipe set 1pc</p>	<p>Black plastic washer,in the drain pipe set 1pc</p>	<p>Black deodorant washer,in the drain pipe set</p>
				
<p>Metal washer,in the drain pipe set</p> 				

Installation Steps

Step 1: Mounting sink chassis

Place the chassis on the ground, insert the lower legs into the corresponding holes in the chassis in turn, and then fix the chassis to the height required by the legs, tighten with screws, and fix each leg in turn.

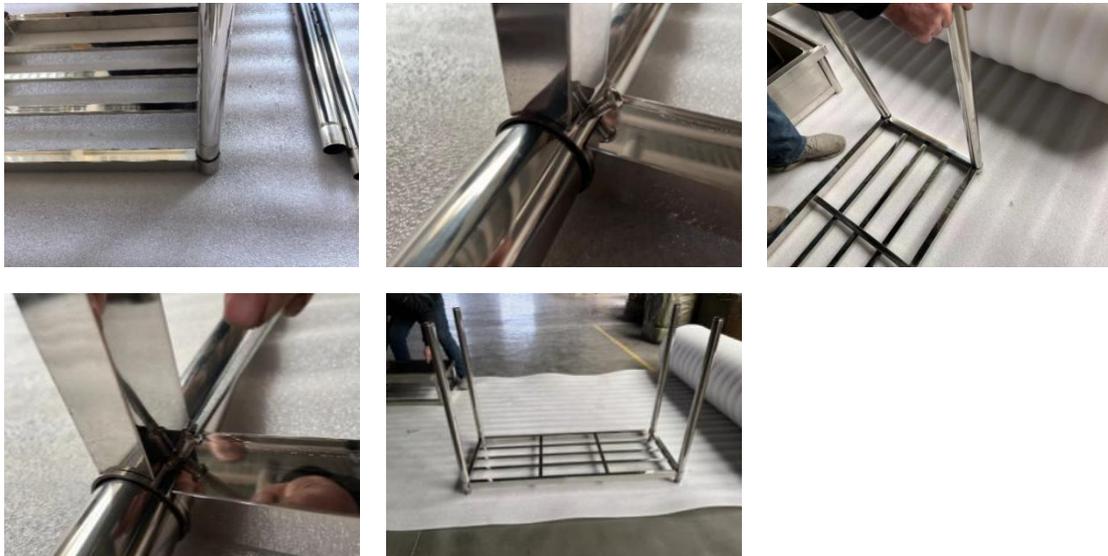

Step 2: Sink Installation

Turn the upper tank upside down, then insert the assembled chassis into the corresponding upper leg, secure it, and reverse it.



Step 3: Install drainage device.

Remove the plastic nut and black plastic rubber ring from the drainer, make sure that the white rubber ring is on the drainer, and put it into the water inlet slot. After inserting it, put the black rubber ring on the drainer, and then rotate and tighten the plastic nut.



Step4: Drain pipe installation

Place the black rubber ring in the drain pipe, thread the yellow fitting to the drain pipe, and then assemble the drain pipe to the drainer assembly and tighten. (Make sure that there is a black plastic washer in the drain pipe) See if you need to install an anti-odor gasket, tear off the film on the blue decorative sheet, plug it in from the bottom of the drain, and then install the black anti-odor gasket to the bottom of the drain, and adjust the position as needed.






Step5: Install faucet fittings

Push in the metal fittings that come with the faucet in the following order to tighten, then thread the white plastic washer from the bottom to the top of the faucet (be sure to check that the white washer is properly installed to prevent water leakage).



Step 6: Install faucet

First insert the gray wire of the faucet into the top hole of the sink, and then insert the hot and cold water inlet pipe into the top hole of the sink in turn, and then insert the metal semicircle washer from the bottom to tighten it, and twist the screw of the gravity ball into two halves with a wrench and set it on the gray line (when setting, you need to pull the gray line faucet to set the gravity ball on that) and then tighten the screw.

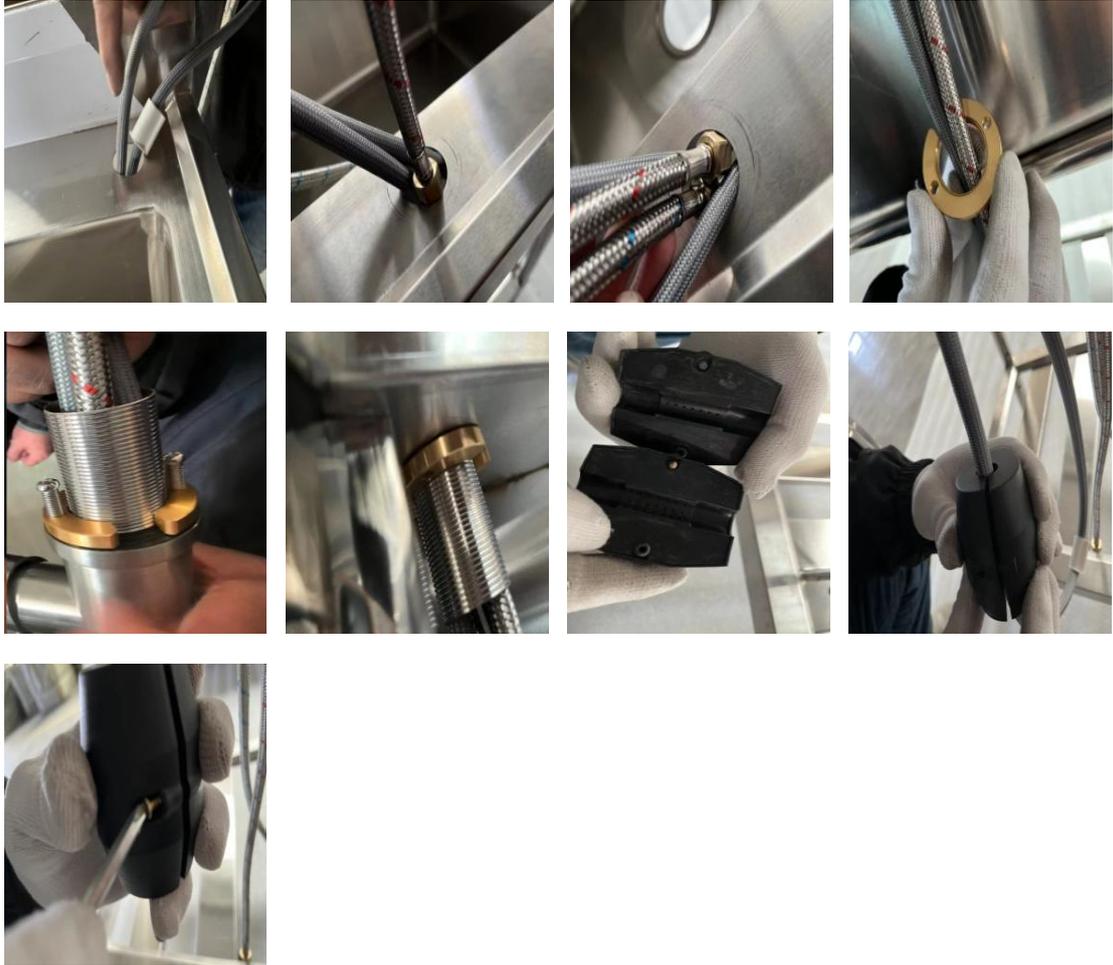

Step 7: Pool installation completed



Thank you for choosing our company's products, please read this instruction manual carefully