


PREPARATION

1. Record your model number for future reference.
2. **DANGER: Risk of electric shock.** To avoid electric shock, the power must be turned off at the circuit breaker or fuse box before beginning the installation procedure.
3. **DANGER: Risk of electric shock.** To avoid electric shock, the outlet box must be properly grounded.
4. **Important Information.** Inspect the product for any damage. This product is for indoor use only. Observe all local codes.



Please see next page for a larger installation image

TOOLS AND MATERIALS NEEDED

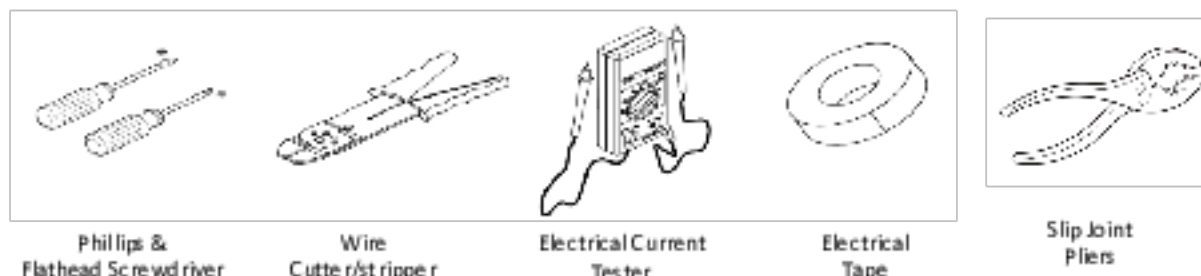

FIXTURE INSTALLATION

1. Remove the fixture and parts bag(s) from the carton. Put them onto a clean and soft cloth to protect finish. Confirm all parts are included.
2. Determine what height you want the fixture to rest at by mixing and matching the downrods (L, M, N, and O).
3. Thread wire and ground wire (P) through desired downrods (L, M, N, and O) and loop (K). Then tighten the desired rods together and attach to base structure (Q).
4. Adjust nipple (E) protruding height to the desired position and then tighten nut (D). Secure coupling (H) onto nipple (E).
5. Thread wire and ground wire (P) through hook (J), coupling ring (I), canopy (G), coupling (H) and nipple (E). Then tighten coupling (H) onto nipple (E). Install hook (J) onto loop (K) and coupling (H).
6. Trim excess cord to minimum 13" beyond canopy (F). Strip wire to 5/8" at the end, and twist.
7. Lift the fixture, attach mounting bar (B) onto outlet box with screws (F). Ensure ground screw (C) is attached as shown.
8. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture green or bare ground wire to the green or bare copper wire in outlet box with wire nut (A) or fasten onto ground screw (C) on mounting plate.
9. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten fixture white wire to the white wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A). See diagram 1.
10. **NOTICE:** To avoid short circuit, make sure wires are not exposed. Fasten the fixture black wire to the black wire in outlet box with wire nut (A). Wrap the wire connector with electrical tape so that the tape seals the end of wire nut (A). See diagram 1.
11. Tuck wires carefully inside outlet box. Let the coupling (H) protrude through the hole in the canopy (G). Attach canopy (G) onto ceiling by threading coupling ring (I) onto coupling (H).
12. **NOTICE:** Do not exceed recommended wattage. Rated **Max 60W Type G9, recommend using G9 15W listed LED bulb.** (Bulb(s) not included).
13. Install bulbs to the sockets (U).
14. Loosen screws (S) and raise arm (R). Then install glass shade (V) onto arm (T). Gently lower arm (R) onto glass shade (V). Then tighten screws (S).
15. Repeat steps 12-14 for all shades.
16. Restore power to circuit at breaker or fuse box.

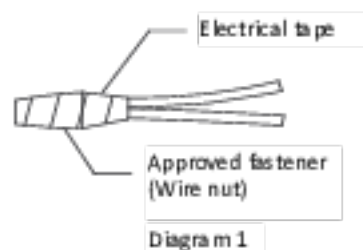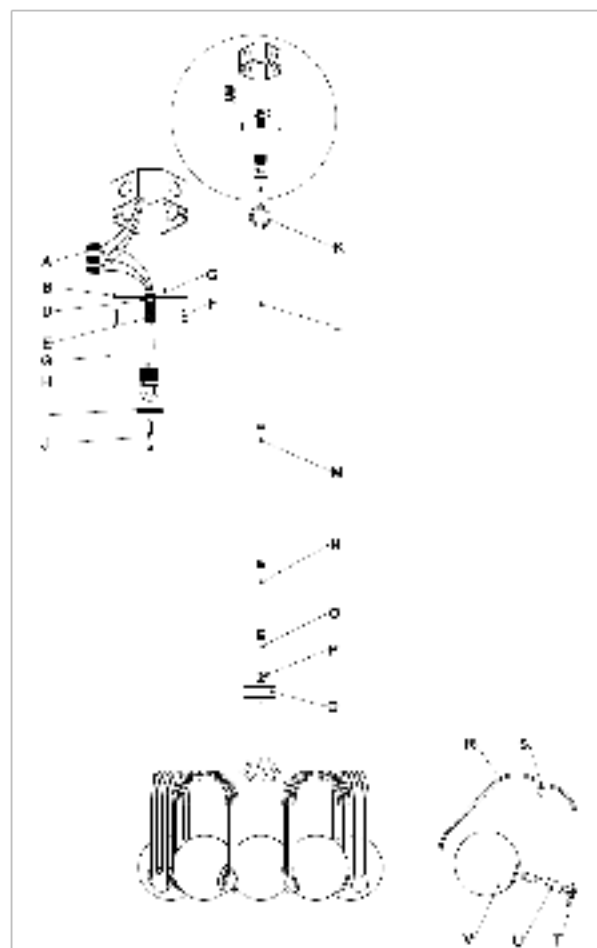

CLEANING: Please clean fixture with a soft and dry cloth ONLY. Clean glass with a mild soap.