


INSTALLATION OF THE FAUCET


1 New Faucet Preparation

Shut off the water supply. Remove the old faucet by disconnecting the supply tubes under sink and then unscrewing the faucet from the counter top by removing the mounting nuts. Clean the sink top surface in preparation for the new faucet.

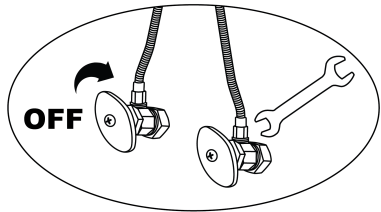


2 Install Faucet on Sink Top

Place the faucet in position on the sink top and screw nuts and washers upward from under the sink onto faucet connectors. Tighten the nuts alternating until they are nearly flush with the underside of the sink top. Then, align the faucet as desired. While maintaining set alignment, tighten down lock nuts to lock faucet into place. **Note:** lever handles should turn towards front of faucet for proper operation.

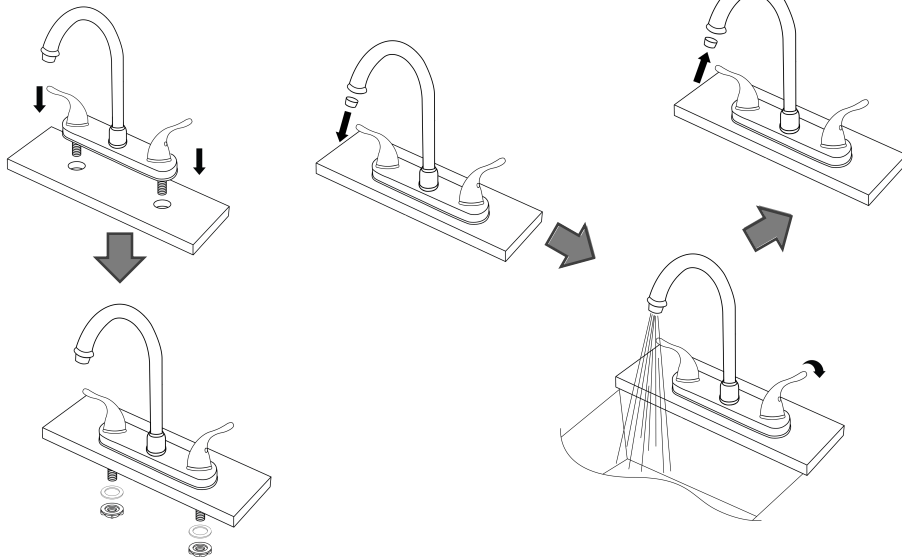

3 Install Faucet Hoses

If you have a hose supply that is long enough to reach the faucet lines, assemble as follows: slide water supply hose into faucet's connections, and side nut up to a flush position. Hose will go partially into faucet's connection. Carefully hand tighten nuts, then use a wrench to hold the hoses securely into place. Plumbers Tape may be used to help prevent leaks.

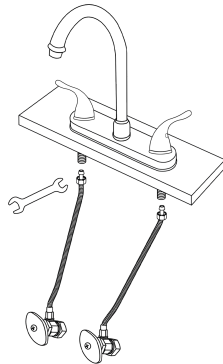

4 Remove Aerator and Flush

Once installation of hoses is complete, remove the aerator. Turn the water supply on and allow both hot and cold water to run for 30 to 60 seconds. While water is running, check for leaks around and under the sink. Once done replace aerator. Your Lordear faucet is ready to use.

MAINTENANCE AND CLEANING

Cleaning Tips: The finish on your product is designed to retain its beautiful sheen for years. To maintain the original look of the finish, a little care and caution should be used. We recommend the use of mild soap and water to clean the product.

THE USE OF ABRASIVE CLEANERS MAY SCRATCH THE FINISH OR CAUSE OTHER DAMAGE.

RECOMMENDED TOOLS AND MATERIALS

- ◆ Adjustable Wrench
- ◆ Plumbers Tape (Thread Seal Tape)


BEFORE YOU BEGIN

There are a variety of things to do before installing any new plumbing system into your home or residence. Before you begin work make sure you:

- ◆ Shut off the main water supply
- ◆ Cover your drain to prevent loss of parts
- ◆ Observed any local plumbing codes
- ◆ Inspect fixture for damage - Replace as necessary

Package Includes:

1x PC Kitchen Sink Faucet
1x PC Hot & Cold Water Supply Hoses

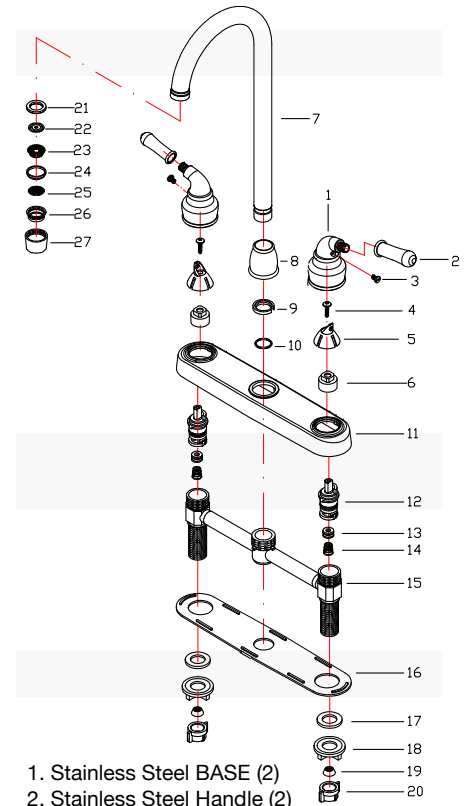

1. Stainless Steel BASE (2)
2. Stainless Steel Handle (2)
3. POM Bolt (2)
4. Stainless Screws (2)
5. POM Inner Sleeve (2)
6. POM Nut (2)
7. Brass Spout
8. Stainless Steel Spout Nut
9. POM C Buckle
10. Rubber O-Ring
11. Stainless Steel Escutcheon
12. POM/Rubber/Stainless Mandrel 2
13. Rubber Washer (2)
14. Stainless Spring (2)
15. POM/Rubber Body
16. PP Base Plate
17. Rubber Washer (2)
18. ABS Mounting Nut (2)
19. Rubber Washer (2)
20. ABS Coupling Nut (2)
21. Rubber Washer
22. POM Flow Restrictor
23. POM Filter Nut
24. POM Ring
25. Stainless Filter
26. POM Filter Seat
27. Stainless Steel Aerator Nut

