CHANGE FOR THE BETTER WITH ENERGY STAR

FANIMATION
studio collection

SLINGER™ v2

LP8147SLBN
(Lowes Item #581598)

LP8147SLBL
(Lowes Item #795392)

LP8147SLMWBN
(Lowes Item #2851336)

72″ Ceiling Fan

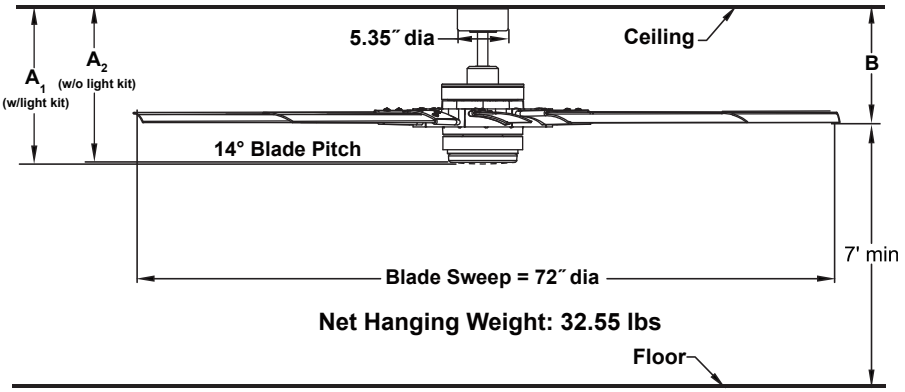

	A_1	A_2	B
Fan w/ 6″downrod	15.65″	15.34″	11.52″
Fan w/12″ downrod	21.65″	21.34″	17.52″
Fan w/18″ downrod	27.65″	27.34″	23.52″
Fan w/24″ downrod	33.65″	33.34″	29.52″
Fan w/36″ downrod	45.65″	45.34″	41.52″
Fan w/48″ downrod	57.65″	57.34″	53.52″
Fan w/60″ downrod	69.65″	69.34″	65.52″
Fan w/72″ downrod	81.65″	81.34″	77.52″

INSTALLATION REQUIREMENTS:
Fan must be attached to a securely anchored electrical junction box capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:
Requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:
DC-165NM sensorless DC motor is designed for optimal performance with this fan. Fan is Energy Star Rated.

BLADES:
A set of nine 29″ composite blades is included.

CONTROL OPTIONS:
TR305S hand-held remote control is included. Push button remote control with 16 fan speeds, fresh air, reverse, ON/OFF dimmer light levels, CCT Select (correlated color temperature selection), fan/light timer, home away, safe exit and off button. Optional TW306 wall control is available — sold separately. Instructions is provided with each control.

LIGHTING OPTIONS:
One 18-watt CCT LED (3000K/4000K/5000K) included.

DOWNROD OPTIONS:
Fan comes with a 1″ dia. x 6″ downrod (DRT1-6). Optional downrods are available in 12″,18″, 24″, 36″, 48″, 60″ and 72″. For installations requiring a longer downrod, a downrod coupler is available. Fan can be mounted on a sloped ceiling up to 19°. Most sloped ceiling installations require a standard 18″ downrod or longer downrod. Optional sloped ceiling kits (SCK1-52) are available for up to 42°. Call technical support for more information.

Available Finishes	
LBN	Brushed Nickel with Gray Blade and Opal Frosted Glass / Steel Cap
LBL	Black with Black Blade and Opal Frosted Glass / Steel Cap
LMWBN	Matte Whith / Brushed Nickel with Matte White Blade and Opal Frosted Glass / Steel Cap

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High (16th)	87	8563	285	0.39	30
Med (9th)	59	5573	615	0.14	9
Low (1th)	29	2478	960	0.05	3

Energy Guide FTC			
Power (Wave)	Total Air Delivery (CFMave)	Estimated Yearly Energy Cost ($)	Ceiling Fan Efficiency (CFM/W)
20	6830	6	342

Light Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1600	3000/4000/5000	90%

LOCATION USE:
Fan is rated for dry and damp locations. This fan is for room over 400 sq ft.