

ASSEMBLY INSTRUCTIONS SKU: HCF-2803


⚠ WARNING

- Turn off electricity at circuit breaker or main fuse box before installation.
- Do not touch the bulb with bare hands.
- Always switch off the electricity supply and allow bulbs to cool for 10 minutes before changing it.
- Do not look directly at lit bulb.

Assembly

It is recommended to use two or more persons during the assembly process.

1. Attach lamp shade (B) on the socket and secure it with socket ring.
2. Unscrew canopy nuts (C) from mounting bracket (D). Attach mounting bracket (D) to the junction box (not included) with two junction box screws (E).
3. Make electrical connections using wire nuts (F)
4. Place canopy (A) against the mounting surface, allowing the preassembled screws on mounting bracket (D) to pass through canopy (A). Secure with previously removed canopy nuts (C)
5. Install light bulbs (not included). This fixture is rated for up to Three (3) **E26 Type A 60-Watt Maximum** Bulbs (not included) or LED Equivalent bulbs (not included).
6. Restore electrical power when complete.

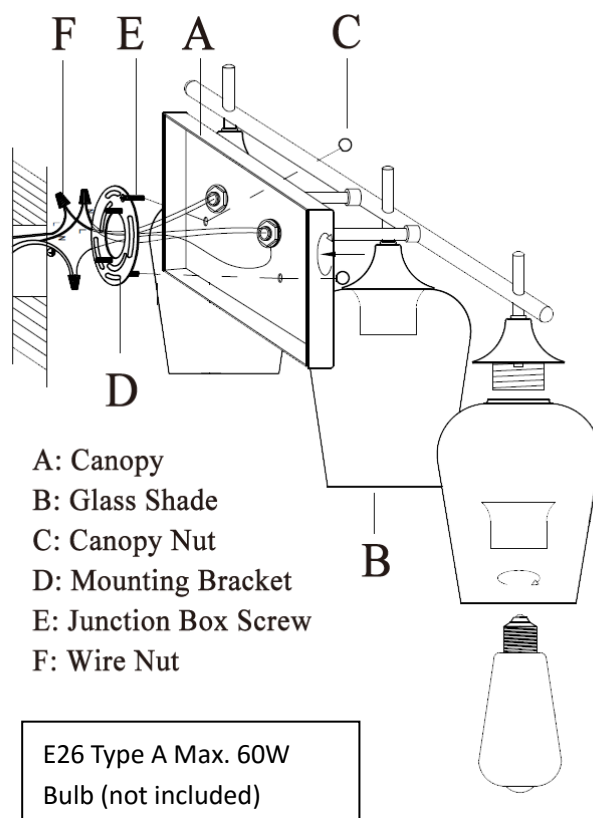

CAUTION! IMPORTANT SAFETY INSTRUCTIONS:

Connect white cord or ribbed surface cord to the white wire of supply circuit.
Connect black cord or cord with half the markings and smooth surface to the black wire of supply circuit.
Connect the bare copper grounding wire from the fixture to the green screw on the mounting bracket and the grounding conductor of the supply circuit. Use U.L/CSA Listed wire connectors suitable for the size, type and number of conductors. No loose strands or loose connections should be present.

Contact Information

Thanks for your purchase. Any questions please don't hesitate to contact us, we'll resolve all your problem ASAP. Customers are always the best teachers for us to keep growing! Should you have any questions or concerns, please do not hesitate to contact us by emailing: help@cs-supportpro.com.