


FFGC3015L S/W/B 30" Gas

		L	C	Ĭ.		Ĺ		E.
Г	K	ш	J		$\boldsymbol{\smile}$	L	K	_

Features				
Controls	Ready-Select™			
Surface Type	Stainless Steel (S), Porcelain (W/B)			
Grates	Black Matte			
Right Front Element (BTU)	12,000			
Right Rear Element (BTU)	5,000			
Left Front Element (BTU)	9,500			
Left Rear Element (BTU)	9,500			
Control Location	Right Side			
Knob Color	Black (S), Color Coordinated (W/B)			
Knob Type	Plastic			
Bowl Type				
Specifications				
Power Supply Connection Location	Right Rear			
Gas Supply Connection Location	Right Rear			
LP Gas Conversion Kit	Included			
Voltage Rating	120V/60V/15A			
Connected Load (kW Rating) @ 120 Volts¹	.001			
Amps @ 120 Volts	1.0			
Minimum Circuit Required (Amps)	15			
Approved for Electric Single Wall Oven Combination Installation	No			
Shipping Weight (Approx.)	50 Lbs.			

<sup>1</sup>For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

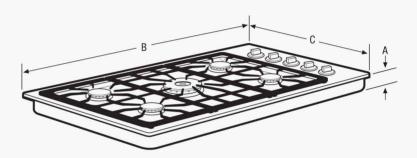

NOTE: Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.



Product Dimensions	
A-Height	4-1/4"
B-Width	30"
C-Depth	21-1/2"

<b>Cutout Dimensions</b>	
Height	5"
Width (Min.)	26-5/8"
Width (Max.)	26-7/8"
Depth (Min.)	19"
Depth (Max.)	19-3/8"

Granite Countertop Installation Kit available.