


Lita with Xtract™ Pull Down Filter Kitchen Faucet

GT529-FLC Finish(C) ☐

GT529-FLS Finish(S) ☐



Specifications

Features

- 1.8 GPM Flow Rate
- 1.0 GPM in Filter Mode
- 1 or 3-Hole Installation; Deck Plate or Single Hole Mounting Option
- 3 Function Pull-Down Sprayer
- 360° Rotating Spout
- All Metal Construction
- Mounting Hardware Included
- Mounting Posts Included

- Filters Included
- High Arc Spout
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- EPA WaterSense Certification 1.8 gpm, 6.8 L/Min
- ASME A112.18.3 (Backflow Prevention)



Dimensions

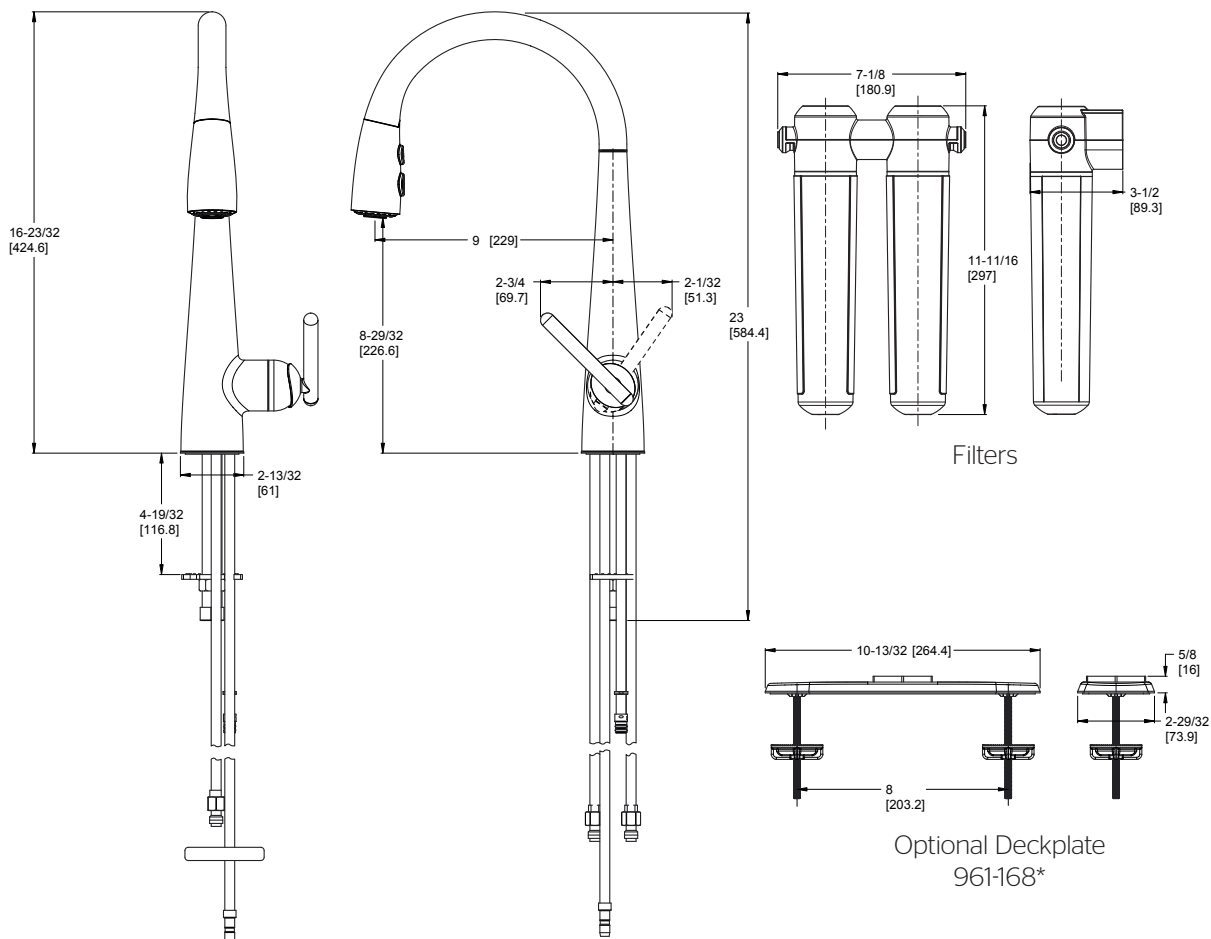

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings