

Simplice®

Semi-professional kitchen sink faucet with threefunction sprayhead K-22033

Features

- Professional-style faucet with an easy-to-clean coated hose and removable coil
- Three-function pull-down sprayhead with touch control allows you to switch between aerated stream, Sweep® spray, and Boost technology
- Sweep® spray creates a wide, forceful blade of water for superior cleaning
- Boost technology increases the flow rate by 30% with the press of a button
- Magnetic docking arm keeps the sprayhead securely in place
- MasterClean™ spravface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Single lever handle is simple to use and makes adjusting water temperature easy
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar)

Material

Premium metal construction for durability and reliability

Installation

- Single- or three-hole installation (escutcheon included)
- Flexible supply lines simplify installation

1-800-4KOHLER (1-800-456-4537)

4-22-2025 20:28 - US/CA

Recommended Products/Accessories

K-77685 Single-cartridge water filtration system K-77686 Double-cartridge water filtration system K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack





Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61 NSF/ANSI/CAN 372 DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® Faucet Lifetime Limited Warrantv

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Brass

Color Code Description


CP Polished Chrome VS Vibrant® Stainless BL Matte Black Vibrant® Brushed Moderne 2MB



Simplice®

KOHLER, Faucets

Semi-professional kitchen sink faucet with threefunction sprayhead K-22033

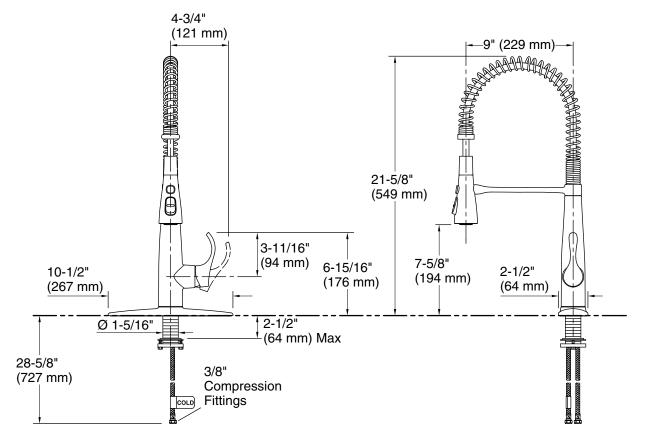

Technical Information

All product dimensions are nominal. Faucet flow rate: 1.5 gal/min (5.7 l/min)

Spout:

Spout reach: 9" (229 mm)

Notes

Install this product according to the installation instructions.

ADA complaint for faucet handles only. ADA compliant for faucet handles only ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

