


Dimension and Clearance


LRG4807U

NG: Input Pressure: 7 inches,
Output Pressure: 5 inches
LP: Input Pressure: 11 inches
Output Pressure: 10 inches
Size of Regulator: $\frac{3}{4}$ inch

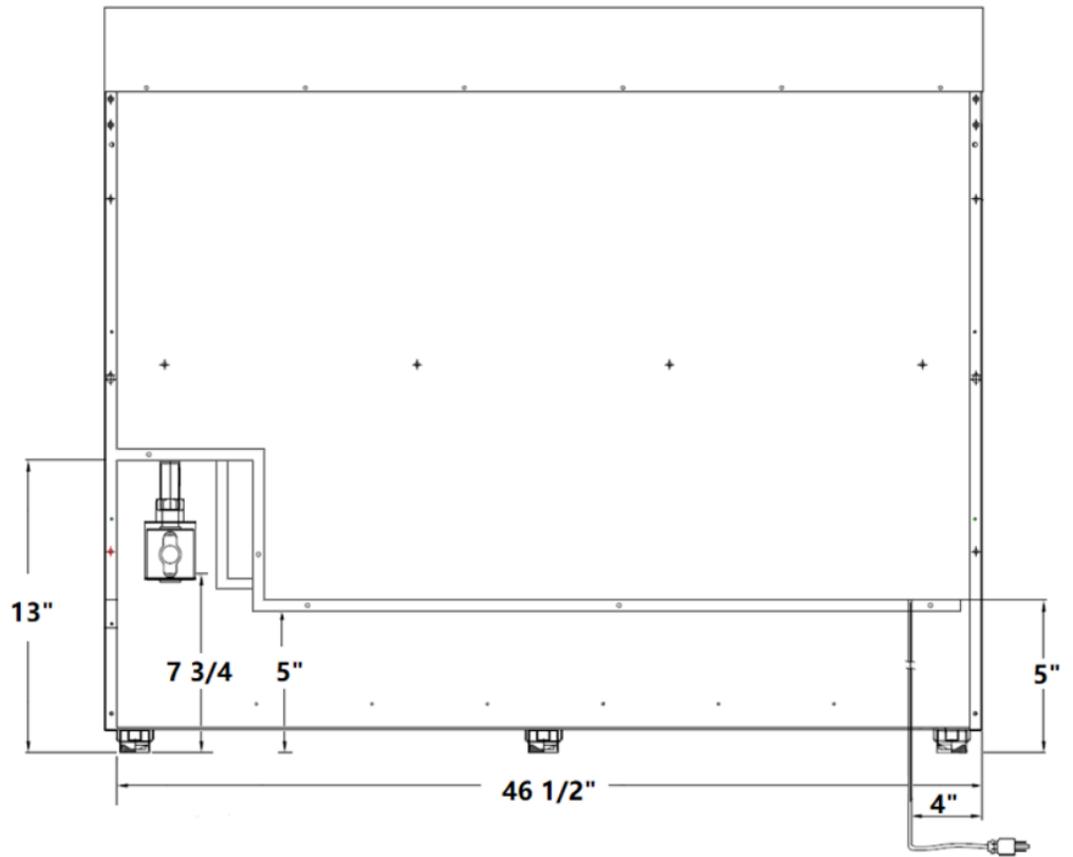

Appendix 1

Oven Knob Installation

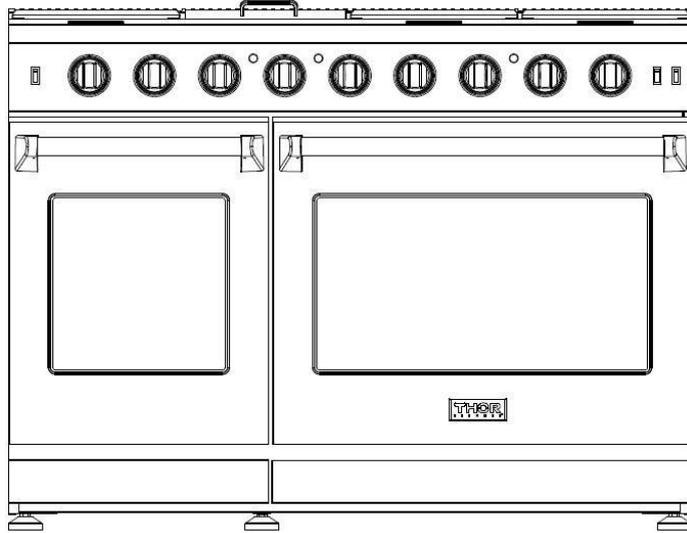

LRG4801U / LRG4807U

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨


LRG4801U / LRG4807U (From Left to Right):

- ①②: Surface Valve Knob
- ③④: Griddle/Small Oven Thermostat Knob,
- ⑤⑥: Surface Valve Knob
- ⑦: Big Oven Thermostat Knob
- ⑧⑨: Surface Valve Knob

Your range might have a KD handle that needs to be installed. Please Follow up the following procedures for the oven door handle installation.


Appendix 3

3.1 Check your Installation Kits for Door Handles

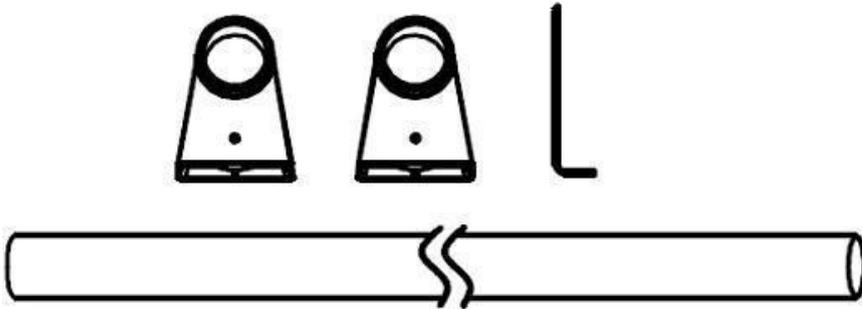

2 * Handle Holders, 1 * Installation Wrench,
1 * Handle (For 18", 30" or 36" Oven)

3.2 Connect door handle holders to each side of the handle

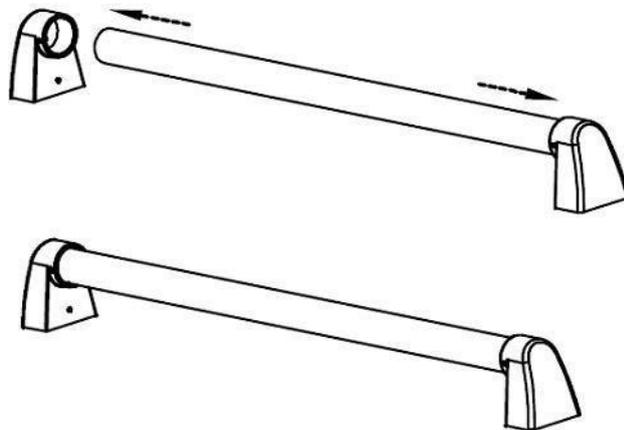


3.3 Secure the oven handle with two screws on each door handle holder (if not, handle might be loose)

Appendix 3




3.4 Lay the door handle against to the oven door and fit it on the connection part, and use the wrench to get the door handle holder tight;

Oven Handle Installation

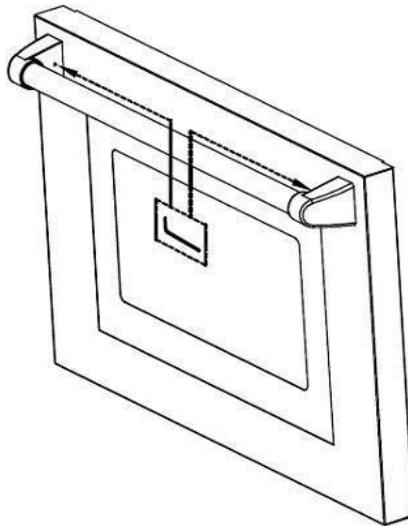


3.3 Use the wrench to tighten the door handle holders.

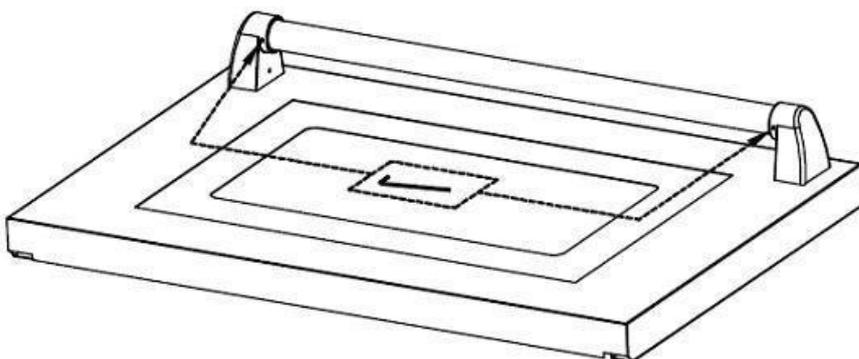

20. Rubber Pad Installation on Back Panel

In order to meet the requirement for the clearance for the back of you Thor Kitchen Range, please install 2 pcs Rubber Pad provided in the manual package Please find the accessories and follow the below steps:


1. check the installation kit included in the manual package;



2 pcs screw



2 pcs rubber pad

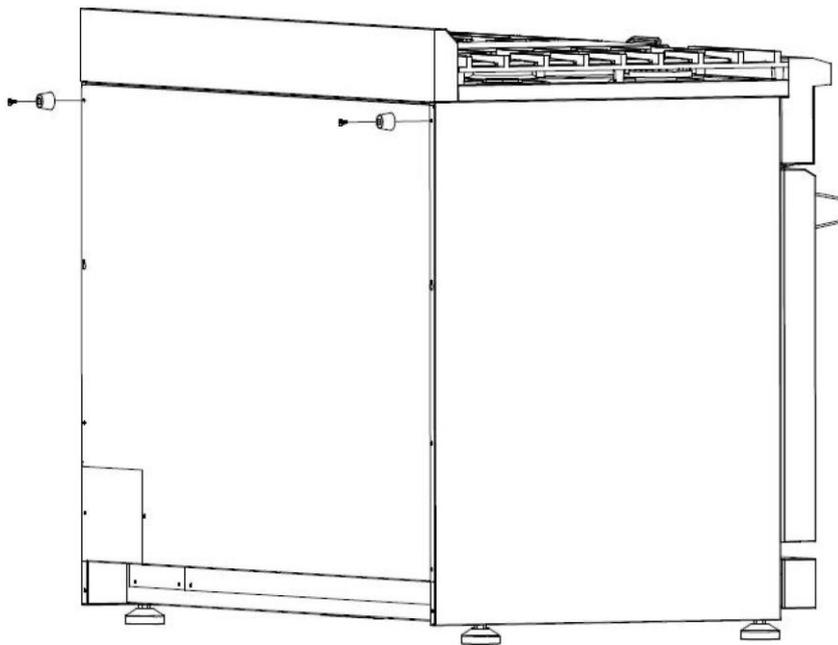

2. Install 2 pcs rubber pad shown above.