

Hisense



DEHUMIDIFIER AUTO DRY
up to 1000 sq ft coverage

MODEL **DH5020K1G**



- Bucket Full Indicator Avoids Overflows
- 3 Modes – Auto, Continuous, Manual
- 3 Fan Speeds – High, Low, Auto
- Low-temperature Operation (38°F)



Low Noise Airflow System

High-performance centrifugal fan ensures quiet operation, achieving just 47 dB(A) with the fan set on "Low"



Energy Efficient

Energy Star means its more energy efficient and helps reduce your utility bill.



Filter Indicator

Washable filter helps to reduce bacteria, odors, and particles.



Warranty

Two (2) years Parts & Labor

Control Humidity - Helps keep your home conveniently dry, fresh, and quiet

The Hisense DH5020K1G Energy Star 35* Pint 2-Speed Dehumidifier quietly collects water into the slide-out internal bucket, or can discharge the water via connecting a garden hose (not included) through the side of the cabinet. Reliable and eco-friendly this dehumidifier can operate at temperatures as low as 38°F. Easy control and the very low sound level make this a versatile choice. Additional features include an adjustable humidistat, easy accessible and washable filter, and full-tank alert.

Note:

*: New DOE test procedure, equivalent to previous 50 Pints:

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved

Hisense

Equivalent to
35/50
PINTS

DEHUMIDIFIER AUTO DRY
up to 1000 sq ft coverage

MODEL **DH5020K1G**

TECHNICAL SPECIFICATIONS

Performance

Model #	DH5020K1G
Dehumidification (Pints/24 hours)	35*
Heating Capacity	N/A
Coverage	Up to 1000 sq ft
Refrigerant	R-410A
Noise Level in dB(A)	47-49 dB(A)

Electrical

Voltage / Freq / Amps	115V / 60Hz / 5.5A
-----------------------	--------------------

General Features

Unit Control Type	Electronic
Fan Control	Button
Adj. Humidity Control	Yes
Display Type	LED
Continuous Run	Yes
Auto Dry	Yes
Manual Setting	30% ~ 80%
Timer-Clock	Yes
Fan Speeds	3 Speeds (HIGH AUTO LOW)
Pump Mode	No

Refrigeration Compartment

Auto Bucket Shutoff	Yes
Bucket Capacity	11.4 pints
Bucket Shutoff Capacity	9.1 pints
Garden Hose Connection	Yes - garden hose not included
Washable Filters	Yes
Max Pump Discharge Height	N/A

Accessories

Quick Connect Hose	No
--------------------	----

Approvals

Safety	UL
Energy	Energy Star

Shipping

Unit Dimension WxDxH (mm)	356 x 273 x 507
Carton Dimension WxDxH (mm)	405 x 335 x 535
Net Weight /Gross Weight (kg)	15.5 / 17.4

Unit Dimension WxDxH (inch)	14 x 10.7 x 20.0
Carton Dimension WxDxH (inch)	15.9 x 13.2 x 21.1
Net Weight /Gross Weight (lbs)	34.1 / 38.3
Loading (40HQJ)	1020
Loading (53')	1008 (floor loaded)
Warranty/UPC	
Parts & Labor	2 Years
UPC	819130026831

Note:


*: New DOE test procedure, equivalent to previous 50 Pints:

Product Images

Control Panel



Gravity draining with garden hose (not included)

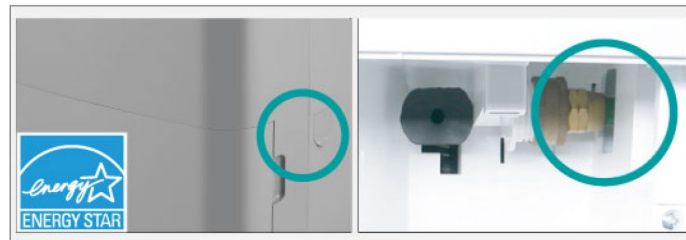

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved



Hisense USA Corporation
7310 McGinnis Ferry Road Suwanee, GA 30024
1-877-465-3566
www.hisense-usa.com