For Style 6601C16 Assembly Instruction Sheet #IS-6601C16

Tools Required: Flathead screwdriver, Phillips screwdriver, pilers, wire cutters, wire strippers, electrical tape, safety glasses


present. If any parts are missing or damaged, do not attempt to assemble, install, or operate the fixture. Contact customer service for replacement Light Source: (5) GU10 35W (Not Include). Preparation: Identify and inspect all parts before beginning installation. Check package content list and diagrams below to be sure all parts are

Warnings and Cautions

Turn off electricity at circuit breaker or main fuse box before installation. Consult a licensed electrician if in doubt. These instructions are provided for your safety. It is very important you read them completely before installing the fixture

We strongly recommend that a licensed, professional electrician perform the installation.

Disconnect fixture from power source before replacing bulbs. Make sure bulbs are given sufficient time to cool before removal

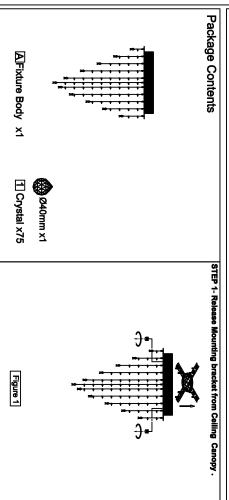

STEP 2 - Attach Mounting bracket to Outlet Box A.Pass the supply wires through the Mounting bracket (EE) Secure It with Outlet Box Screws with the head of the Green Ground Screw facing you. Tighten until snug. Attach the Mounting bracket (EE) to the Outlet Box

Hardware Contents

DESCRIPTION Wire nut Screw

QUANTITY 2pcs 2pcs

BB PART

႙

⇒ 8





Figure 2

Figure 4

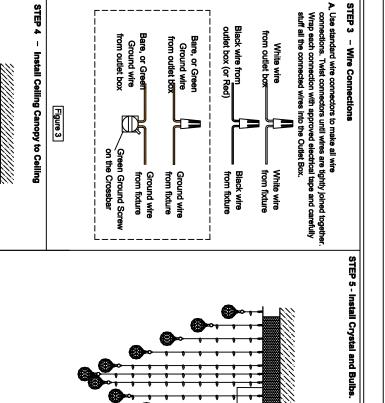

WARNING

ACCORDINGLY AND NEEDS TO BE REINFORCDE THIS FIXTERE IS VERY HEAVY



Figure 5

THE CRYSTAL BALL INSTALLATION INSTRUCTIONS

