

Project Number
16.00246



Date
2/2/2016

LAB 6

Test Sample Description

Catalog Number: P2834-12930K9

Description: LED Linear Vanity 13" w/ Etched Opal Refractor Part # 93068584

Test Method: IES LM-79-08 § 10

Preburn Time: 0:00

Time To Stabilize: 6:46

Total Operating Time: 7:03

Input Voltage (Volts): 120.1

Input Current (Amps): 0.204

Input Wattage (Watts): 22.0

Ambient Temp (°C): 25.0



Hubbell Lighting, Inc.

701 Millennium Boulevard
Greenville, SC 29607
www.hubbellighting.com

Checked: D. ROBBINS/B. FLAUM
Approved: M. WASHBURN



This report shall not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.



HUBBELL
Lighting

701 Millennium Blvd
Greenville, SC 29607
www.hubbelllighting.com



REPORT NUMBER: 16.00246

PAGE: 2 OF 8

ISSUE DATE: 02/02/16

PREPARED FOR: PROGRESS

CATALOG NUMBER: P2834-12930K9

LUMINAIRE: LED Linear Vanity 13" w/ Etched Opal Refractor Part # 93068584

LAMP CAT. NO.: EVAC-5630-L48SE-07

LAMP: 48 - EVAC 3000K LEDs

MOUNTING: Wall

NOTE: DATA SHOWN IS ABSOLUTE FOR THE SAMPLE PROVIDED.

CANDELA DISTRIBUTION

	0.0	45.0	90.0	135.0	180.0	FLUX
0	21	21	21	21	21	
5	57	22	24	22	44	3
15	53	65	42	41	38	13
25	93	78	53	43	43	28
35	111	93	63	44	40	43
45	118	92	53	35	28	48
55	123	90	42	23	16	50
65	126	87	30	12	11	49
75	128	85	19	9	9	48
85	130	85	8	7	8	47
90	130	84	3	6	8	
95	130	84	8	7	8	46
105	129	85	18	9	9	48
115	126	87	30	12	11	49
125	123	90	41	22	15	50
135	118	92	53	34	27	48
145	111	93	62	43	40	43
155	103	92	53	48	52	31
165	93	71	42	46	62	17
175	28	37	32	33	22	4
180	19	19	19	19	19	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0- 30	44	6.7
0- 40	87	13.1
0- 60	185	27.9
0- 90	330	49.6
90-120	144	21.6
90-130	193	29.1
90-150	284	42.7
90-180	335	50.4
0-180	665	100.0


TOTAL INPUT WATTS = 22.0

EFFICACY = 30.2 Lm/W

CIE TYPE - DIRECT-INDIRECT

PLANE : 0-DEG 90-DEG 180-DEG

SPACING CRITERIA : 4.2 2.6 2.0

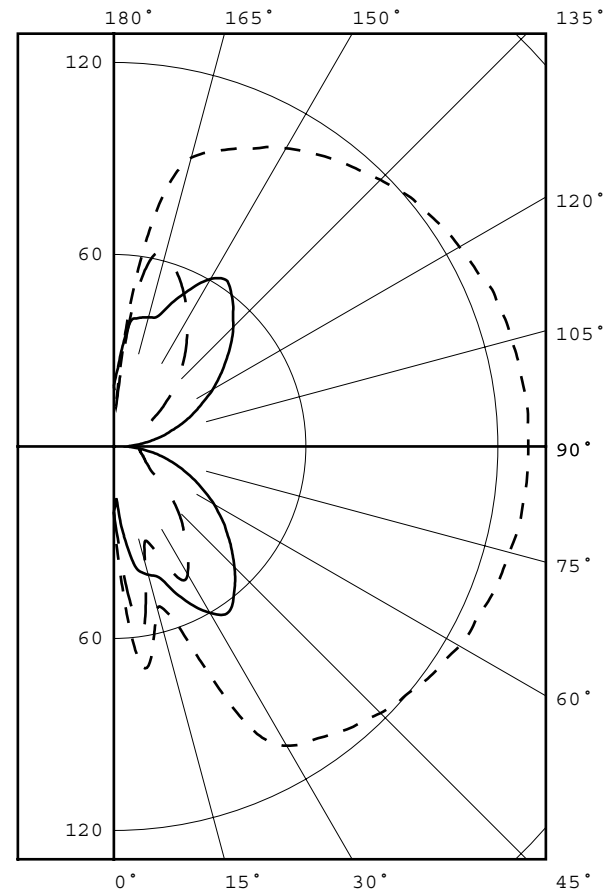

LEGEND:

0-deg: - - - - -
90-deg: _____
180-deg: — — — — —



®

HUBBELL
Lighting701 Millennium Blvd
Greenville, SC 29607
www.hubbellighting.comREPORT NUMBER: 16.00246
ISSUE DATE: 02/02/16
PREPARED FOR: PROGRESS

PAGE: 3 OF 8

PLANE : 0-DEG 90-DEG
LUMINOUS LENGTH : 2.000 13.000
HEIGHT OF SIDE : 2.000 2.000

LUMINANCE DATA IN CANDELA/SQ METER

ANGLE IN DEG	AVERAGE 0-DEG	AVERAGE 90-DEG	AVERAGE 180-DEG
45	4964.	3893.	1188.
55	5246.	3578.	680.
65	5628.	3191.	489.
75	6228.	2750.	438.
85	7124.	2008.	440.



NVLAP[®]
NVLAP LAB CODE: 201003-0

PAGE: 4 OF 8

CANDELA DISTRIBUTION

[illegible]



®

HUBBELL
Lighting701 Millennium Blvd
Greenville, SC 29607
www.hubbellighting.comREPORT NUMBER: 16.00246
ISSUE DATE: 02/02/16
PREPARED FOR: PROGRESS

PAGE: 5 OF 8

ZONAL LUMEN SUMMARY

0- 5	1.
5- 10	3.
10- 15	5.
15- 20	8.
20- 25	12.
25- 30	16.
30- 35	20.
35- 40	22.
40- 45	24.
45- 50	25.
50- 55	25.
55- 60	25.
60- 65	25.
65- 70	25.
70- 75	24.
75- 80	24.
80- 85	24.
85- 90	23.
90- 95	23.
95-100	23.
100-105	24.
105-110	24.
110-115	25.
115-120	25.
120-125	25.
125-130	25.
130-135	24.
135-140	24.
140-145	22.
145-150	20.
150-155	17.
155-160	14.
160-165	10.
165-170	6.
170-175	3.
175-180	1.



®

HUBBELL
Lighting701 Millennium Blvd
Greenville, SC 29607
www.hubbellighting.comREPORT NUMBER: 16.00246
ISSUE DATE: 02/02/16
PREPARED FOR: PROGRESS

PAGE: 6 OF 8

5-DEGREE

ZONAL LUMEN SUMMARY

0- 5	1
5- 10	3
10- 15	5
15- 20	8
20- 25	12
25- 30	16
30- 35	20
35- 40	22
40- 45	24
45- 50	25
50- 55	25
55- 60	25
60- 65	25
65- 70	25
70- 75	24
75- 80	24
80- 85	24
85- 90	23
90- 95	23
95-100	23
100-105	24
105-110	24
110-115	25
115-120	25
120-125	25
125-130	25
130-135	24
135-140	24
140-145	22
145-150	20
150-155	17
155-160	14
160-165	10
165-170	6
170-175	3
175-180	1

10-DEGREE

ZONAL LUMEN SUMMARY

0- 10	3
0- 20	16
0- 30	44
0- 40	87
0- 50	135
0- 60	185
0- 70	235
0- 80	283
0- 90	330
0-100	376
0-110	424
0-120	473
0-130	523
0-140	571
0-150	614
0-160	645
0-170	661
0-180	665



HUBBELL
Lighting

701 Millennium Blvd
Greenville, SC 29607
www.hubbellighting.com



REPORT NUMBER: 16.00246
ISSUE DATE: 02/02/16

PAGE: 7 OF 8

PREPARED FOR: PROGRESS

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

EFFECTIVE FLOOR CAVITY REFLECTANCE 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	94	89	83	79	86	81	77	73	68	64	61	55	53	50	44	42	40	35
2	85	75	68	62	77	69	63	57	58	52	48	47	43	40	37	34	31	27
3	76	65	57	50	69	60	52	46	50	44	39	40	36	32	31	28	25	21
4	69	57	48	41	63	52	44	38	43	37	32	35	30	26	27	24	21	17
5	63	50	41	34	57	46	38	32	38	32	27	31	26	22	24	21	18	14
6	58	45	36	29	53	41	33	27	34	28	23	28	23	19	22	18	15	12
7	53	40	31	25	49	37	29	23	31	24	20	25	20	16	20	16	13	10
8	49	36	28	22	45	33	26	20	28	22	17	23	18	14	18	14	11	9
9	46	33	25	19	42	30	23	18	25	19	15	21	16	13	16	13	10	8
10	43	30	22	17	39	27	20	16	23	17	13	19	14	11	15	11	9	7

ALL CANDELA, LUMENS, LUMINANCE, AND VCP VALUES IN THIS REPORT ARE BASED ON ABSOLUTE PHOTOMETRY. THE COEFFICIENT OF UTILIZATION VALUES ARE BASED ON THE TOTAL ABSOLUTE LUMEN OUTPUT OF THIS LUMINAIRE SAMPLE.

Project Number
16.00246



Date
2/2/2016

Goniophotometer Calibration

Calibration Lamp: GE 1000W, 120V, T6, CL (FEL)

Lamp Number: ITL78966-1000-14

Calibration Current: 8.300 Amps DC

Total Luminous Flux: 23413.0 Lumens

Calibration Date: 07/18/2015

Test Equipment Used

<i>Instrument</i>	<i>Manufacturer / Model</i>	<i>S/N</i>	<i>Calibration Due:</i>
<i>Goniophotometer</i>	ITL / HLI LAB 6 - Test Distance: 31.3'	N/A	N/A
<i>Power Analyzer</i>	Yokogawa / WT 332	C2QA27076V	11/10/2016
<i>Power Source</i>	Voltage-Regulated House Power	N/A	N/A
<i>Thermometer</i>	National Instruments / USB-TC01	1912745	11/10/2016

Hubbell Lighting, Inc.

701 Millennium Boulevard
Greenville, SC 29607
www.hubbellighting.com

This report shall not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.