



Bifacial 200W Monocrystalline Solar Panel

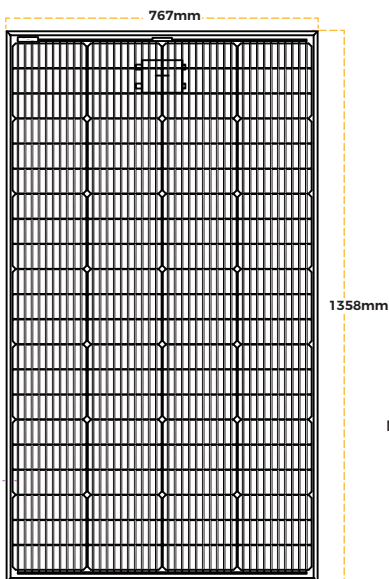


Front Profile (unit mm)

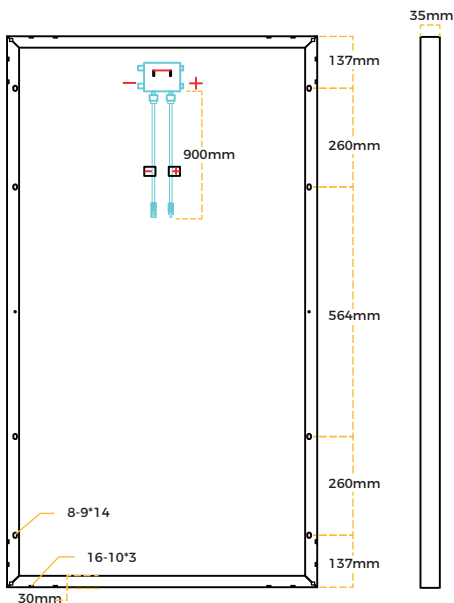

Back Profile (unit mm)

Side Profile (unit mm)



Electrical Data (STC)

Maximum Power (Pmax)	200W±5%
Solar cells Efficiency	23%
Max. Power Voltage (Vmp)	23.96V±5%
Max. Power Current (Imp)	8.35A±5%
Open Circuit Voltage(Voc)	28.56V±5%
Short Circuit Current(Isc)	8.8A±5%
Max. System Voltage	1000V DC
Max. Series Fuse Rating	20A

"STC": Irradiance: 1000W/m², Temperature: 25°C, Air Mass: 1.5"

Mechanical Data

Mono Solar Cells	10BB 7.2 x 2.4 in (182 x 61 mm)
Number of Cells	84 (4 x 21)
Dimension	53.5 x 30.2 x 1.4 in (1358 x 767 x 35 mm)
Weight	24.3lb (11KG)
Front Tempered Glass	0.13in (3.2mm)
Junction Box	IP68
MC4 Cables	12 AWG(4.0mm ²) 3FT (900mm)
Frame	Anodized Aluminum Alloy

Temperature Characteristics

Temperature Coefficient of Pmax	-0.39%/C
Temperature Coefficient of Voc	-0.33%/C
Temperature Coefficient of Isc	-0.06%/C
Operating Temperature Limits	-40 °F~+185F / -40 °C~+85 °C

Warranty

- 10 years Material & workmanship warranty
- 25 years Linear power output warranty
- (Please refer to product warranty for details)

WARNING ELECTRICAL HAZARD

Before using this product, please read the user manual carefully and properly keep for reference.

CONTACT US

- ✉ (US/CA) service@bougeRV.com
(BougeRV Website) support@bougeRV.com
- ☎ 1-408-656-8402 (Mon.-Fri. 9 am - 6 pm PST)
- 🌐 www.bougeRV.com
- 📞 1-669-232-7427