
ASSEMBLY INSTRUCTIONS



- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- ◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

Stem

TOOLS REQUIRED

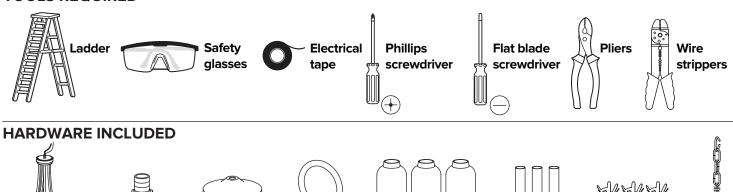



Canopy

Fixture



Screw Collar

Ring

Nipple and Nut





Cover



Screws

Fixture

Finial






Wire Nuts


*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE



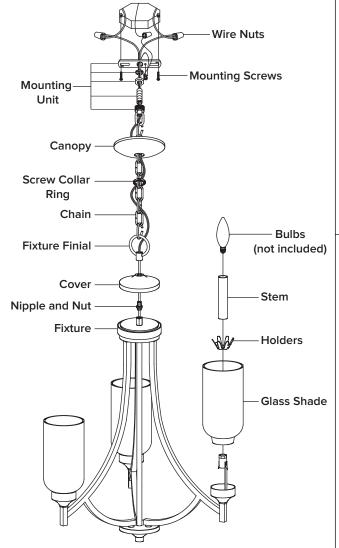


INSTALLATION STEP 1

Adjust arms to proper position.



STEP 2

- 1. Weave the fixture wire and fixture ground wire through the nipple and nut, cover and fixture finial.
- 2. Tighten the nipple and nut, cover




STEP 3

Use the **mounting screws** to attach the mounting unit to the junction box.

Holders


Chain

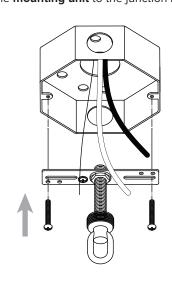


ASSEMBLY INSTRUCTIONS (INSTALLATION)

STEP 4

- Choose the length of the **chain** you need (Open the chain using
 a phillips screwdriver (not included)
 and pliers (not included).)
- 2. Attach the end of the **chain** to the **fixture finial**.



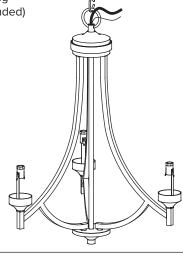


STEP 5


- Pass the chain and the branch wires through the screw collar ring and canopy.
- 2. Attach the end of the **chain** to the **mounting unit**.
- 3. Feed the branch wires through the pipe nipple on the **mounting unit**.




STEP 6

Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

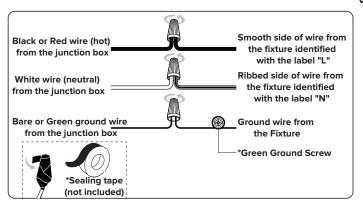

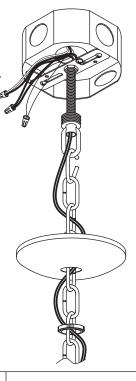

STEP 7
Secure the canopy to the mountring unit with the screw collar ring.

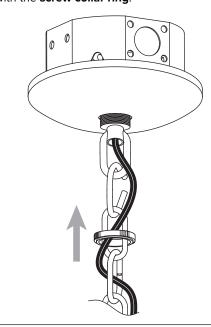

STEP 8

Attach the glass shade onto fixture using holders and stem.

