


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0365 / C0366

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. Read and save these instructions.

Hardware Package (included):

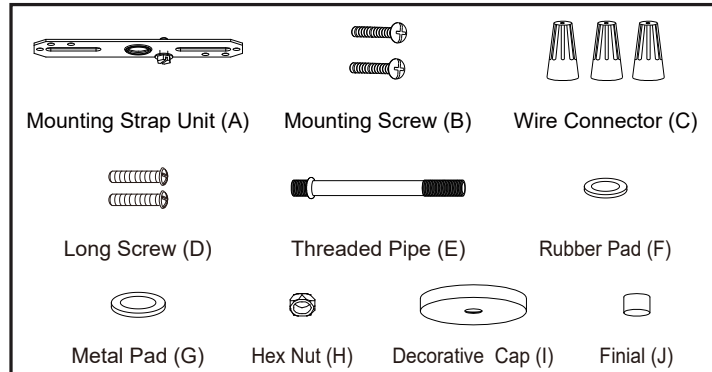


Installation Steps

Turn off the power at fuse or circuit box



1. Attach the two long screws (D) to the mounting strap unit (A), and screw in 2 to 3 turns.
2. Attach the mounting strap unit (A) to the outlet box by using two mounting screws (B).
3. Pull out the source wires from the outlet box. Make wire connections using wire connectors (C) as follows:
 - Connect the hot wires (black insulation) from the fixture to the black wire from the power source.
 - Connect the neutral wires (white insulation) from the fixture to the white wire from the power source.
 - Attach the fixture ground wire (bare wire) to the mounting strap unit (A) with the green ground screw, then connect it to the house ground wire with the wire connector (C).Carefully put all of the wires back into the outlet box.
4. Attach the ceiling pan to the mounting strap unit (A) by inserting two long screw (D) heads into the keyhole slots. Rotate the ceiling pan until it is locked into place, then tighten the long screws to secure it.
5. Attach the threaded pipe (E) to the coupling.
6. Install 2 x 60W Max. medium base bulbs (not included).
See relamping label at socket area or packaging for maximum wattage allowed.
7. Attach the glass shade to the ceiling pan by inserting the threaded pipe (E), and then secure it with the rubber pad (F), metal pad (G), hex nut (H), decorative cap (I) and finial (J).


Turn on the power at fuse or circuit box

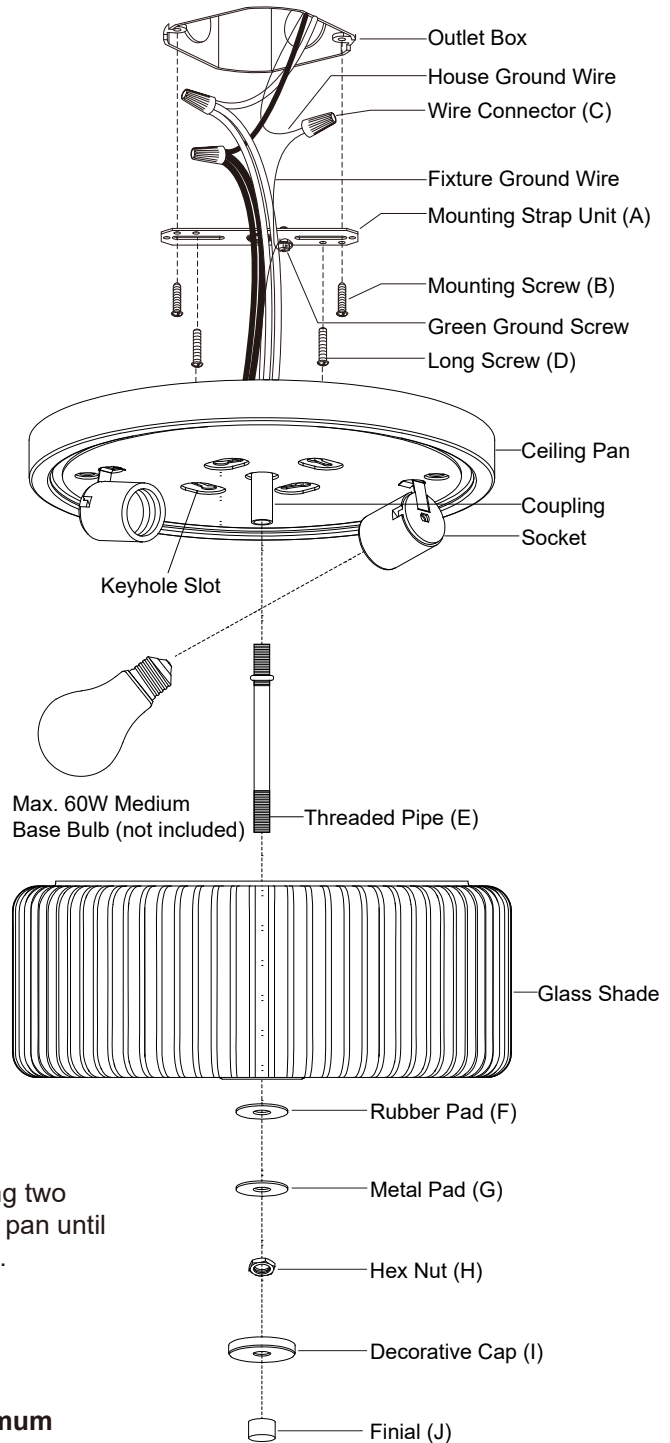

The following parts are available for reorder if damaged or missing.

Spare Parts List:

					Assembly Kit 7164MM (1SET) for C0365 7165MM (1SET) for C0366
Mounting Strap Unit (A)	Mounting Screw (B)	Wire Connector (C)	Long Screw (D)	Threaded Pipe (E)	
					 Glass Shade 10586CR
Rubber Pad (F)	Metal Pad (G)	Hex Nut (H)	Decorative Cap (I)	Finial (J)	

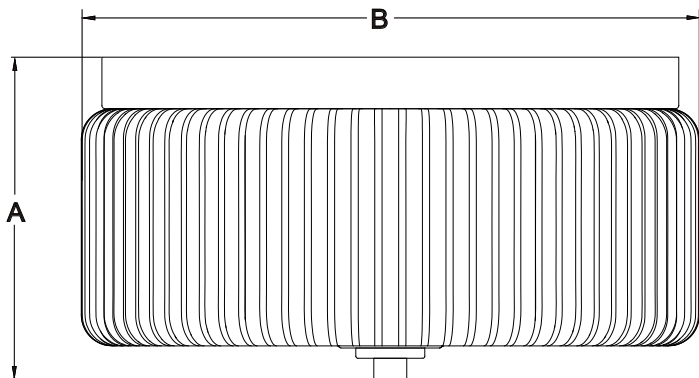

A: 6"
B: 11-3/4"

1 Year Warranty

Vaxcel warrants all of our products against defects in workmanship and finishes for one year following the date of shipment.

Exclusions: This warranty does not include the failure of products from extreme acts of nature; environmental conditions not suited for the products intended use; operation in temperatures outside of the range specified in the instruction manual; usage with improper power supply, power surges or dips. For coastal locations, some corrosion is considered normal for the environment.

Vaxcel reserves the right to repair, replace or issue a credit for any properly installed product, provided it is returned per RMA instruction. This warranty is limited to the cost of the product only and does not extend to transportation, installation or replacement costs.

How can warranty service be obtained?
 info@vaxcel.com
 1-800-482-9235