

## Features

- Includes mirror defogging
- Dimmable LED task lighting to 1%
- Compatible with most Triac/Phase-cut dimmers
- Energy efficient LED lighting:

|                                    |          |          |
|------------------------------------|----------|----------|
| Kelvin                             | 2700     | 4000     |
| CRI                                | 90+      | 90+      |
| Lumens*                            | 746-1488 | 746-1488 |
| Lux**                              | 485      | 485      |
| R9 Value*                          | 50+      | 50+      |
| Foot-candles**                     | 45       | 45       |
| Watt Output - LED                  | 42       | 42       |
| Watt Output - LED with defogger on | 70       | 70       |

\* Based on a measurement of subset of sizes, shapes and lighting styles

† Measured at 18" from center of the mirror

## Construction

- Anodized aluminum back frame
- Quality polished edge mirror
- Power cords installed for easy plugin installation
- Constructed for surface mounting
- Includes installation hardware

## Codes/Standards Applicable

Vitality Mirror is UL certified to:


- UL 962
- CSA-C22.2, No. 12-82

## Dimensions

Height: 30" (762 mm)

Width: 36" (914 mm)

Depth: 1-3/4" (45 mm)

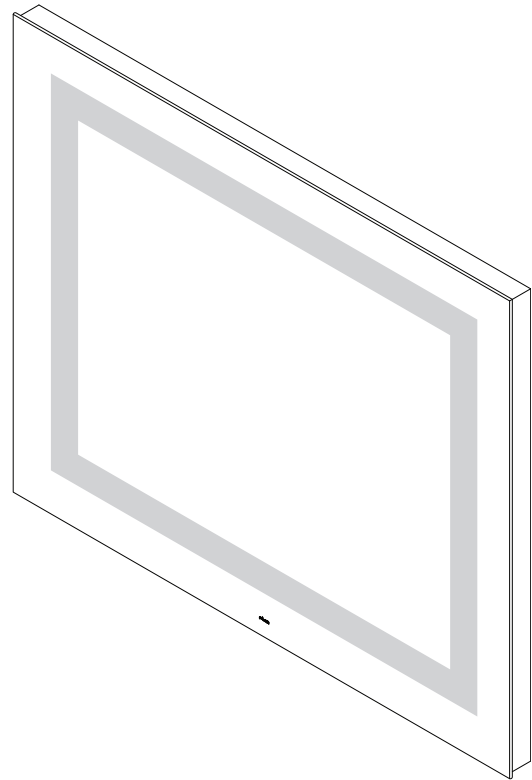


## Model Number Key

| Vitality | Mirror | Width | Height | Shape         | Light Pattern | Edge Type           | Options      | Color Temp             |
|----------|--------|-------|--------|---------------|---------------|---------------------|--------------|------------------------|
| Y        | M      | 36    | 30     | R = Rectangle | I = Inset     | FP = Flat, Polished | D = Defogger | 3 = 2700K<br>4 = 4000K |

## Electrical System

- 120 Vac 60Hz (TBD) recessed wall outlet as shown in drawing

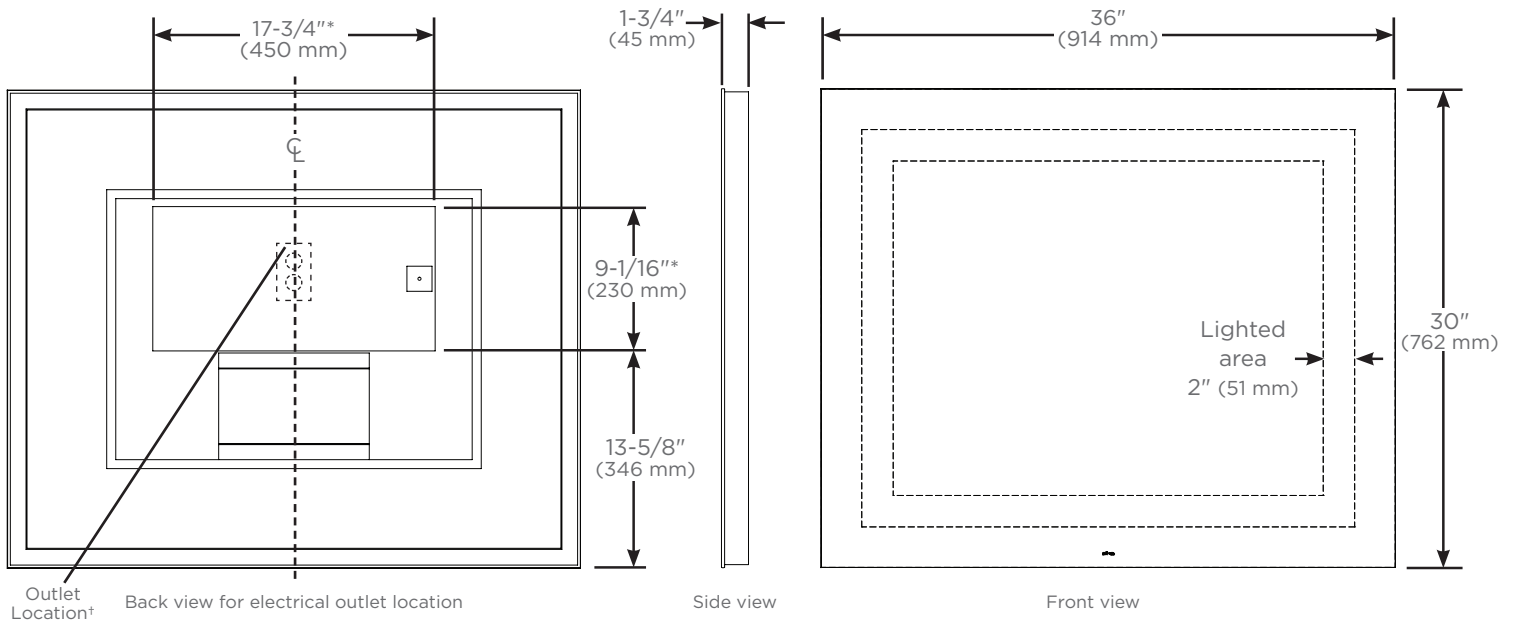

\* Defogger Size

† See instructions for wiring and location