
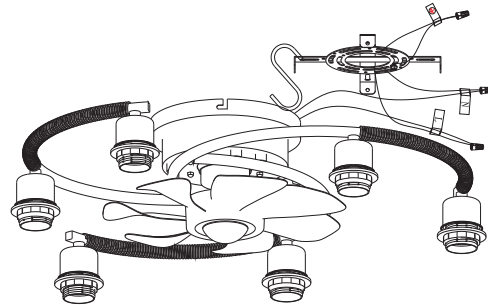


INSTALLATION INSTRUCTIONS


NO.2004

7. Secure the ceiling mount to the motor head shell (as shown in the figure) with M3*6 screws using a screwdriver.


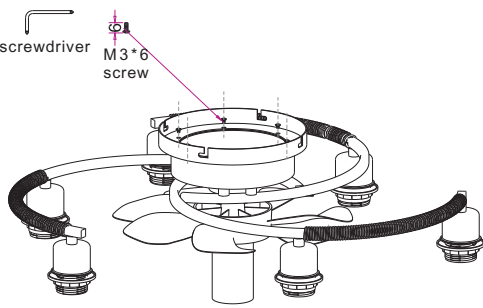


9. Turn off the power. Hang the lamp body on the hook, then connect the L/N power lines to the corresponding lamp lines using wiring nuts.

8. Drive the hanging bracket into the ceiling with special screws.

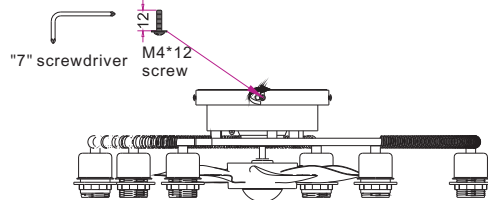


10. Align the canopy with the hanging plate holes, push it flush with the ceiling, and tighten it with M4 * L12 screws.

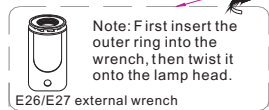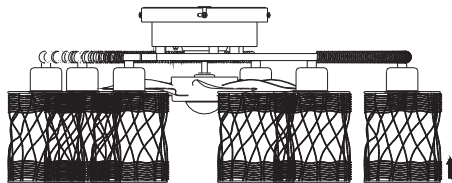


12. Refer to the figure and use an E26/E27 external wrench to screw the lamp head rings onto the corresponding lamp heads, then tighten them securely.

11. Unscrew all the lamp head rings.

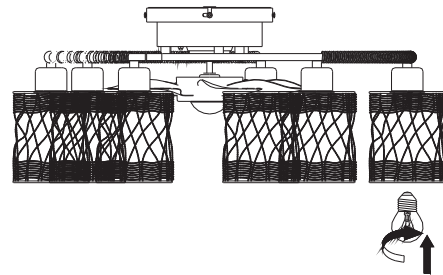

13. With the power disconnected, install the light source (bulbs not included) to complete the full fixture installation.

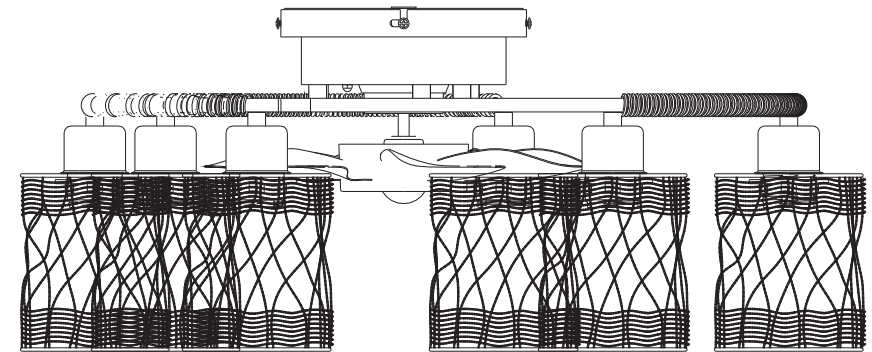

Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Please Scan the QR code to watch the installation video. If you have any questions, please feel free to contact us through the order page.




Warning!

1. Installation should be performed by a professional.
2. To prevent electric shock, please turn off the power before installing, repairing, or cleaning the light fixture.
3. This light fixture operates only within 110V-265V.
4. Do not install the light fixture in damp conditions.
5. Keep the light fixture away from acidic and corrosive materials.


Package Includes

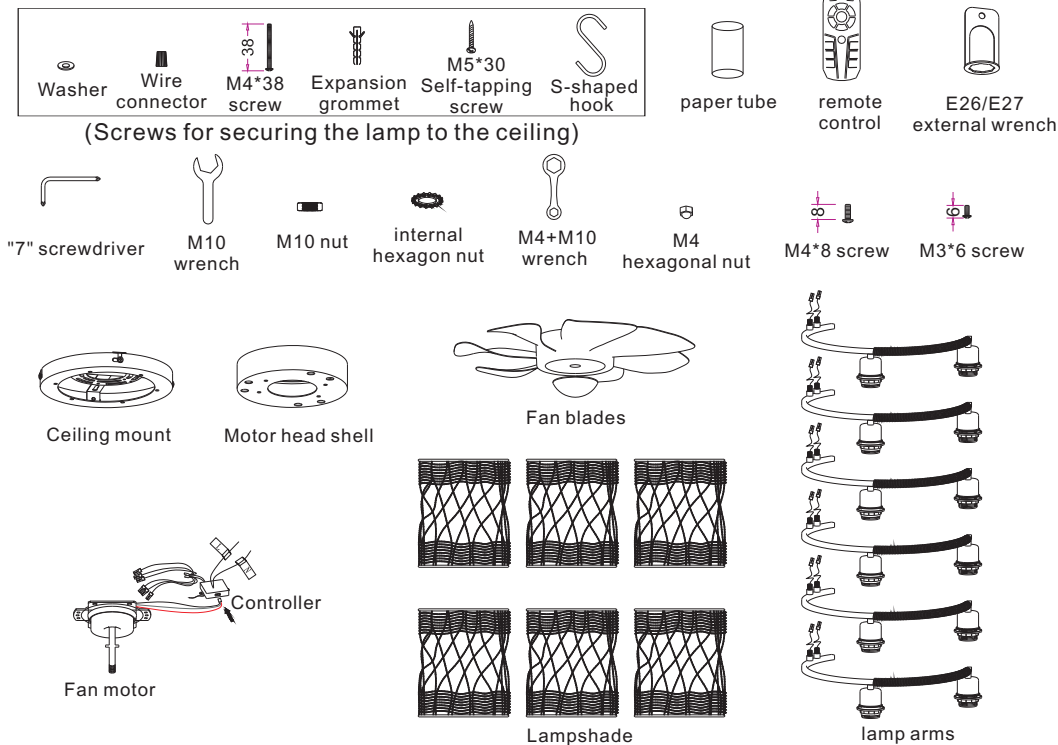


Installation Steps

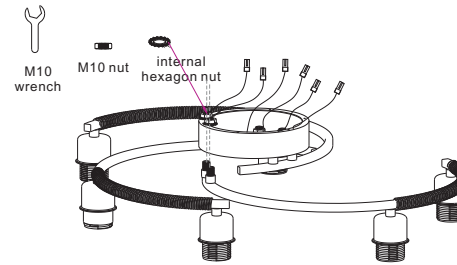


1. Pass the lamp arm through the bottom hole of the motor head shell (as shown in the figure) and tighten with an internal hexagon nut + M10 nut + wrench.

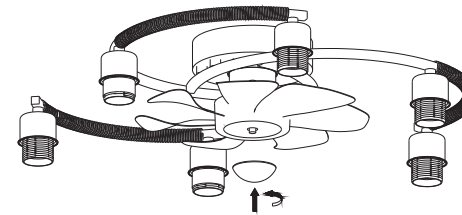


3. Attach the fan blades and tighten the fan blade cap by rotating counterclockwise.

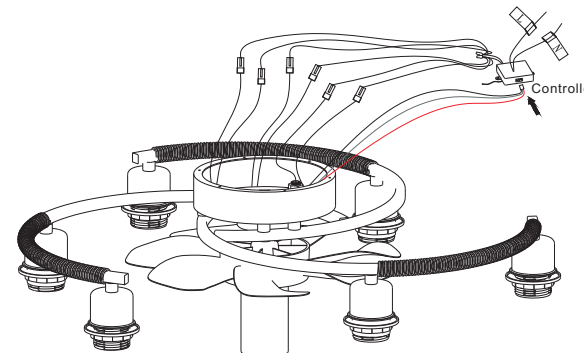


5. Connect the controller + lighting wire properly.

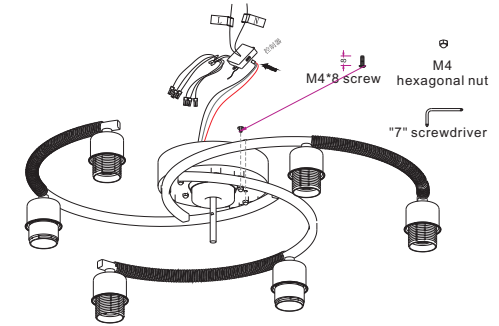

2. Secure the fan motor to the motor head shell (as shown in the figure) with M4*8 screws + M4 hexagonal nut using a screwdriver.

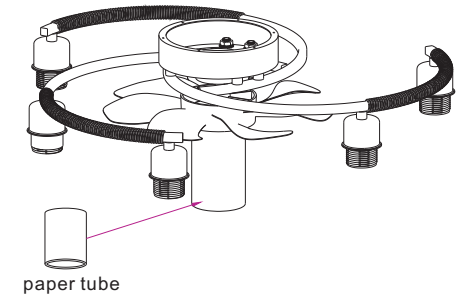

4. Place a paper tube at the bottom of the fan.



6. Disassemble the hanging bracket from the ceiling mount.