


# RUBIK SERIES

## VMDL000603A009WH

**VONN**

|          |       |            |       |
|----------|-------|------------|-------|
| PROJECT: | TYPE: | CATALOG #: | DATE: |
|----------|-------|------------|-------|

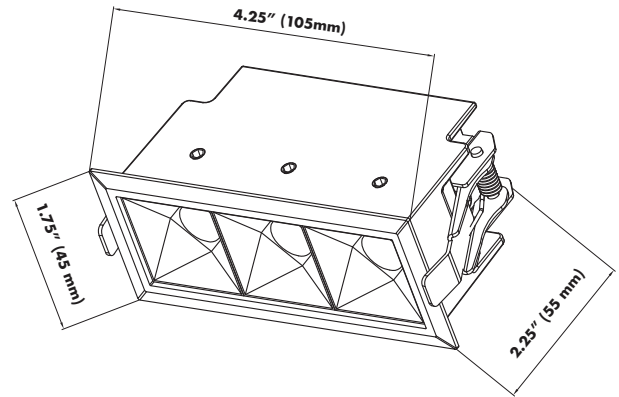

### NOMINAL STANDARD SPECIFICATIONS

|                    |                  |
|--------------------|------------------|
| SKU:               | VMDL000603A009WH |
| FINISH:            | WHITE            |
| LUMEN OUTPUT:      | 173.93           |
| INPUT VOLTAGE:     | 100 - 277V       |
| COLOR TEMPERATURE: | 3000K            |
| CRI: 90            | 90               |
| DIMMING:           | 0-10V            |
| POSITIONING:       | FIXED            |
| BEAM ANGLE:        | 34°              |
| WATTAGE:           | 8.6 W            |
| CUT OUT:           | 0.59"            |
| ENVIRONMENT:       | DRY / IP20       |
| MOUNTING:          | SURFACE          |

### FEATURES

- LED Fixed trim downlight, RUBIK Series
- Aluminum body structure available in White finish
- Integrated LED 3-spot fixture, recessed installation
- IC Rated
- DIMENSIONS: 4.25"L x 1.75"W x 2.25"H
- HOLE SIZE: 4"L x 1.5"W
- BRIGHTNESS: 555.03 Lumens
- IP Rate: IP20
- ETL, cETL, Title 20 Compliant, Title 24 Compliant, Prop 65 Compliant, Energy Star Compliant
- 3 Year Limited Warranty

\*\*\*THE MEASUREMENTS ARE ROUNDED TO THE NEAREST 1/4"\*\*\*

### SAMPLE ORDERING SKU

| 1                | 2           | 3           | 4               | 5              | 6                       |
|------------------|-------------|-------------|-----------------|----------------|-------------------------|
| VMDL000603A009WH | 03          | WH          | 30K             | B34            |                         |
| 1 - SKU          | 2 - WATTAGE | 3 - FINISH  | 4 - COLOR TEMP. | 5 - BEAM ANGLE | 6 - OTHER OPTIONS       |
| VMDL000603A009   | 009 - 8.6 W | WH - White  | 27K - 2700*     | B12 -12°*      | EMD - EMERGENCY DRIVER  |
|                  |             | BL - Black* | 30K - 3000      | B20 -20°*      | EMC - EMERGENCY CIRCUIT |
|                  |             |             | 35K - 3500*     | B34 -34°       |                         |
|                  |             |             | 40K - 4000*     | B48 -48°*      |                         |
|                  |             |             |                 |                |                         |

### NOTES


\*ANY CUSTOM MODIFICATION WILL SUBJECT TO MINIMUM ORDER QUANTITY. (M.O.Q.)

### RELATED PRODUCTS AVAILABLE:


VMDL000601B003BL  
VMDL000601B003WH  
VMDL000601R003BL  
VMDL000601R003WH

|          |       |            |       |
|----------|-------|------------|-------|
| PROJECT: | TYPE: | CATALOG #: | DATE: |
|----------|-------|------------|-------|

PHOTOMETRICS  
30K - 3000 - STANDARD

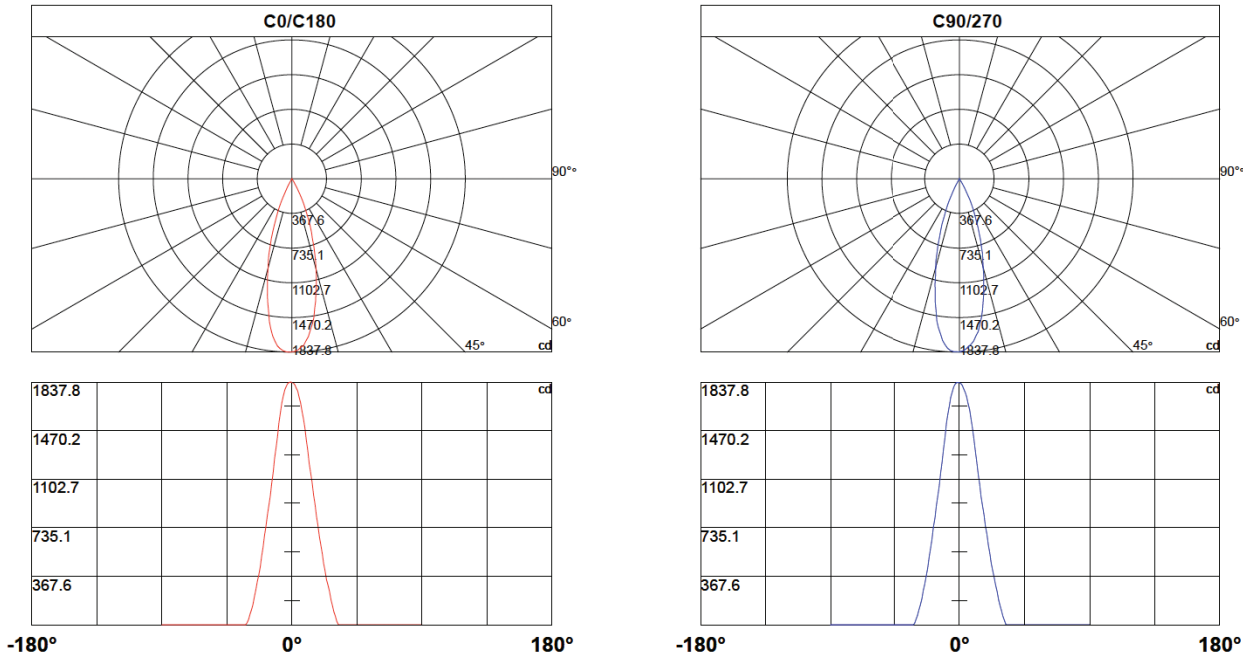

BEAM ANGLE  
30K - 3000 - STANDARD

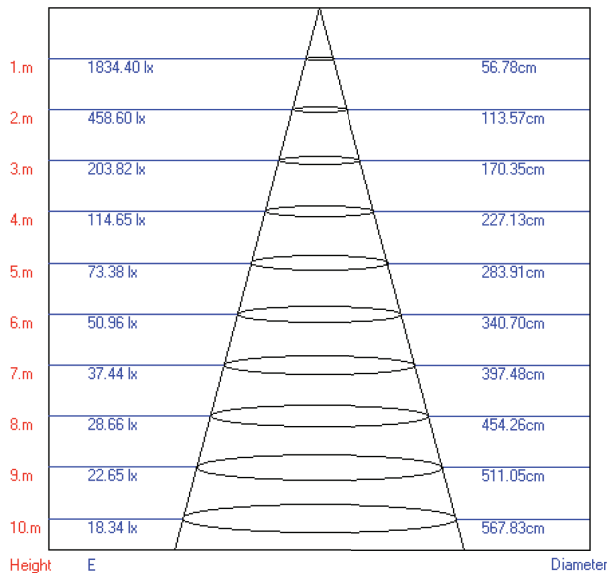

Beam Angle:31.70°