

Bruton™ Pull-Down Culinary Faucet

- GT529-BRUB Finish(B) ☐
- GT529-BRUBG Finish(BG) ☐
- GT529-BRUC Finish(C) ☐
- GT529-BRUS Finish(S) ☐



Specifications

Features

- 1.8 GPM Flow Rate
- 3 Function Pull-Down Sprayer (Spray, Stream, and Pause)
- 3/8" Connections
- 360° Rotating Spout
- 11' Pull-Down Hose Length
- Braided Nylon Hose
- AccuDock™ Sprayhead Docking
- MagnePfit™ Sprayhead Docking
- Forward Handle Operation
- Optional Deckplate, Order 961-258* Separately
- Nylon Flex-Line Supply Lines
- Wipe Clean™ Nozzles
- Pfist Connect™
- TiteSeal™ Technology
- Pforever Seal™ Ceramic Disc Valve
- Pforever Warranty*




Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- NSF 61/9 AnnexG Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

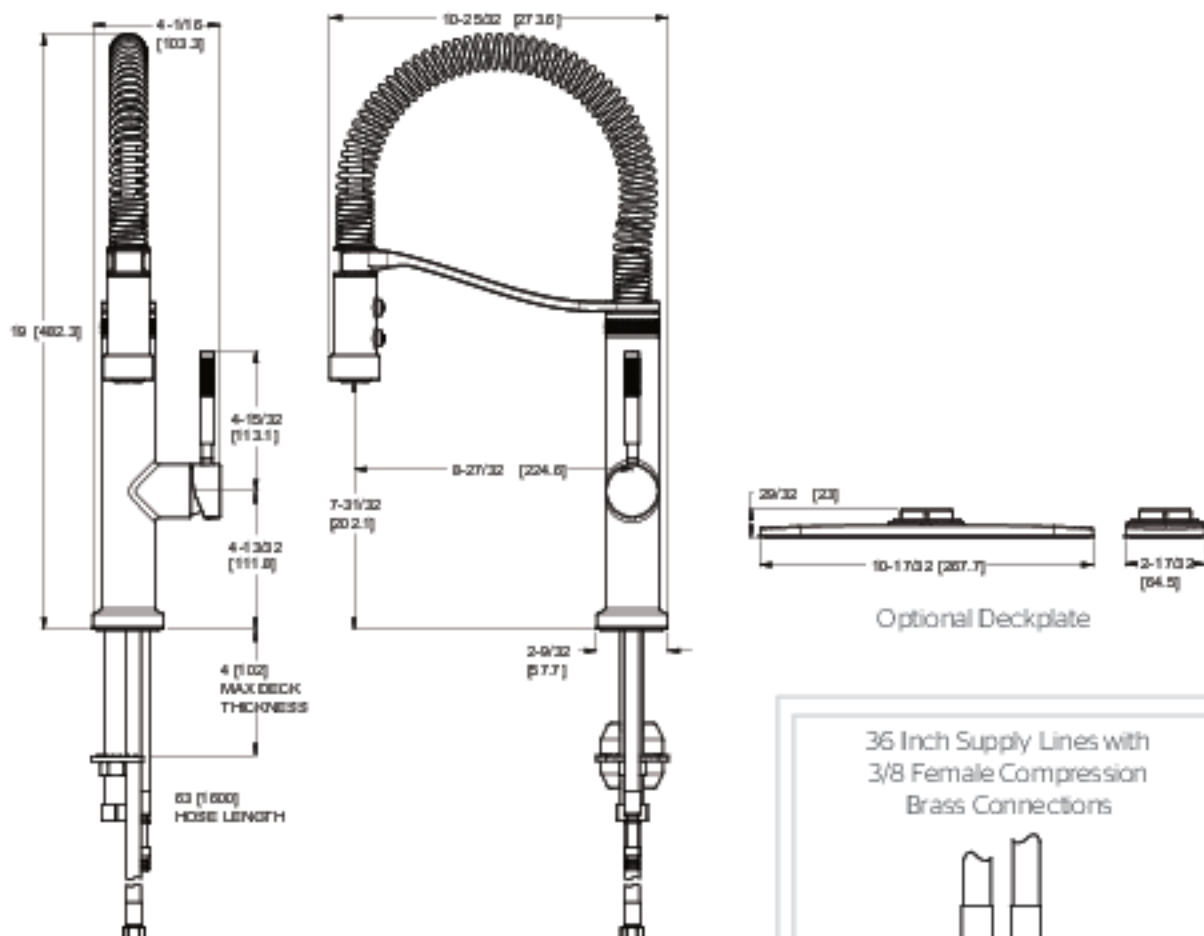

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings