

## LED Decorative Surface Mount

Ceiling flush mounted • Wet location listed **PROGRESS LED**

### Description:

The all-in-one LED Surface Mount uses an intuitive snap-in system that allows easy flush mount installation to a junction box. 7" round with decorative glass ring. 3000K, 1050 lumens, 90+ CRI. Dimming with many ELV dimmers. Wet location listed.

### Specifications:

- Brushed Nickel (-09) (Plated)
- Aluminum construction
- Diffused polycarbonate lens, Etched glass accent
- An intuitive snap-in system that allows easy flush mount installation to a junction box.
- 7" round with decorative glass ring.
- 1050 lumens, 3000K 90 CRI
- Wet location listed.
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting bracket for outlet box included
- 6" of wire supplied
- Meets Colifornia Title 24 - JA8 - 2016

### Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	1050/63 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Wet location listed
	Meets Colifornia Title 24 - JA8 - 2016


**P8147-0930K9**

### Images:




### Dimensions:

Diameter: Diameter: 7-1/4"  
Height: 2-3/4"




#### Recessed Mount with Quick-Link




Order option: P8595-01

Recessed Adapter


E26 Edison  
Base Adapter



#### J-Box Mount with Quick-Link



J-Box Adapter (included)



# LED Decorative Surface Mount


Ceiling flush mounted • Wet location listed 

## Photometrics:

## P8147-0930K9

ELECTRICAL DATA	P8147-0930K9
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	17
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

**P8147-0930K9**  
 LED Light Engine: 3000 K 90 CRI CRI  
 System Wattage: 17  
 Fixture delivered lumens: 1050  
 Fixture Efficacy: 63  
 Spacing Criteria:

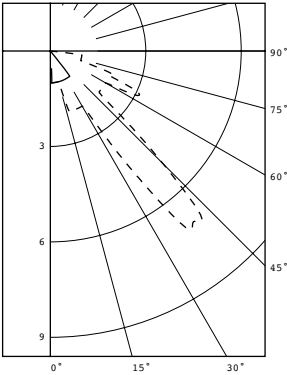

**P8147-0930K9****Dimming Notes:**

---

P8147 is designed to be compatible with many Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls**

---

Lutron AYCL-153P

Lutron AY-600

Lutron TGCL-153P

Leviton 6674

Leviton 6672

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.