

SPECIFICATIONS

REEF™ TWO HANDLE MINI-WIDSPREAD LAVATORY FAUCET


Model

D304533

Description

- Ceramic disc valves
- 4 1/2" high spout, 4 5/8" spout length, laminar flow
- With 50/50 touch down drain assembly
- 3 hole mount, 4" - 12" installation
- 1.2gpm (4.5L/min) maximum flow rate @60 psi
- Meets CEC Requirement

Flow Rate

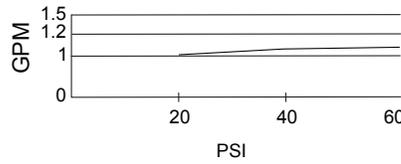

Standards



NSF/ANSI 372

- NSF/ANSI 372

MEETS ASME A112.18.1M/A112.18.1

- ASME A112.18.1M/A112.18.1



- ADA Accessibility Guidelines for Buildings and Facilities - 309.4 Operation for Operable Parts


- WaterSense Pending

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

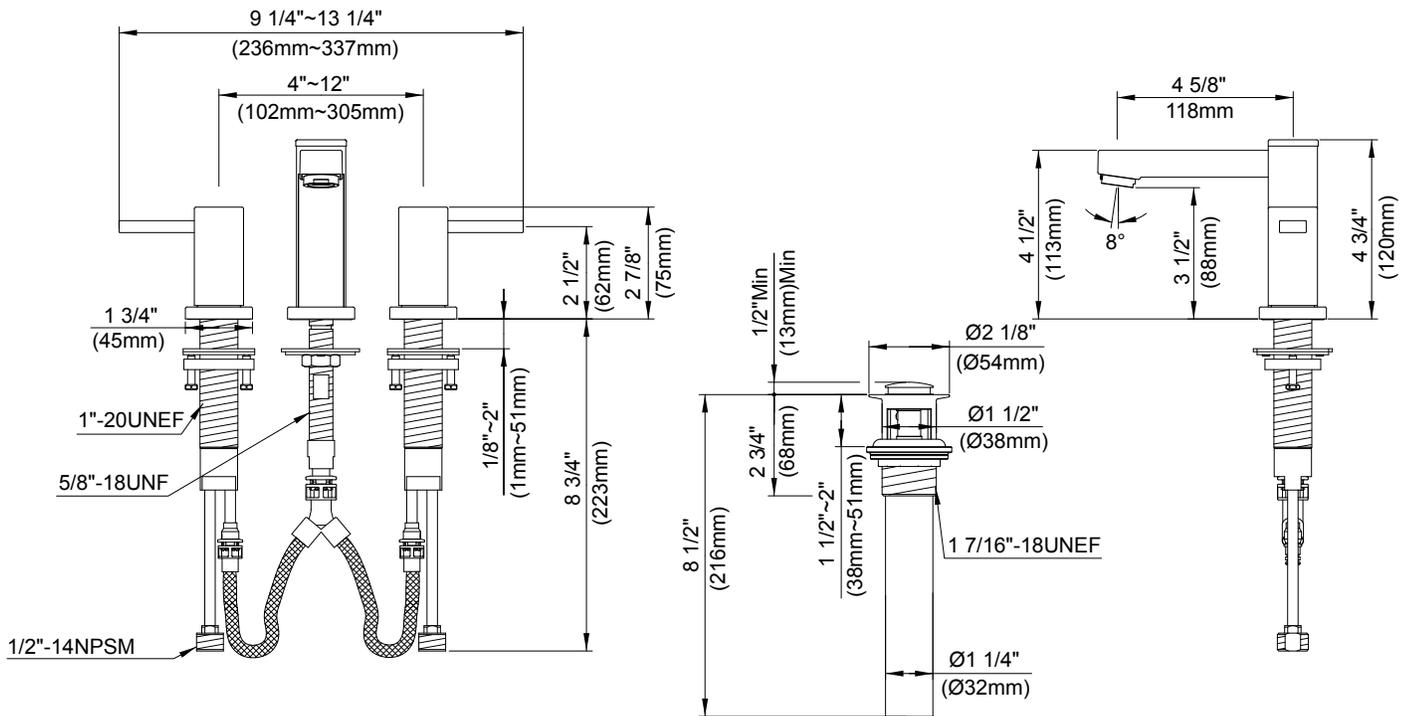

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____