


Catalog Number: UAB417-200

Features and Ratings

- Ringless Meter Cover
- 1 Phase, 3 Wire, 240 VAC
- Painted G90 Steel Enclosure
- 200A Breaker Factory Installed
- Meter Socket Rating: 200A Continuous
- 4 Jaw Meter Socket
- 10,000 AIC Max. Rated (See Wiring Diagram for Details)
- For Overhead or Underground Service
- RX Type (Small) Hub Provision with Closure Plate Installed

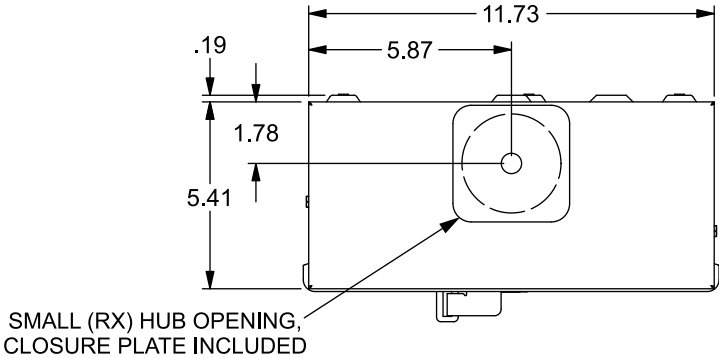


Accessories

CONDUIT HUBS (RX Type)	
TRADE SIZE	CATALOG No.
1-1/4 INCH	EC38597 or H38597-2
1-1/2 INCH	EC38598 or H38598-2
2 INCH	EC38599 or H38599-2
2-1/2 INCH	EC38600 or H38600-2
Hub Cover Plate	EC38595 or H38595-1

5th Jaw Kit
Cat No: EC5J2

Schematic,
Torques & Wire Size

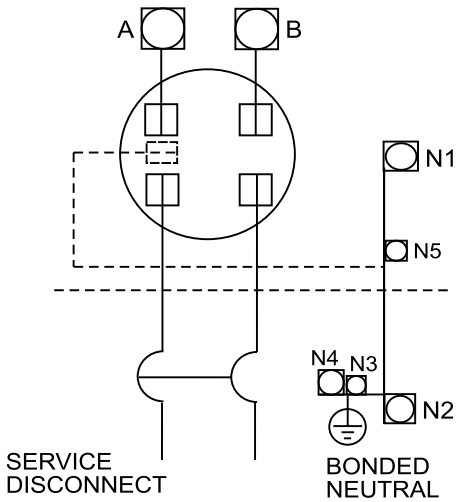





Terminal	Wire Size	Torque
A, B, N1 & N2	#6-250 kcmil	250 lb-in
N4, N5	#14-2/0 AWG	50 lb-in
N3	#14-2 AWG	50 lb-in

Use 60/75°C Copper or Aluminum Conductors in Terminals A, B, N1, N2, N3, N4, and N5.

Main Breaker Terminals
See markings on breaker for torque requirements and conductor rating.

VIEW SHOWN WITH COVERS AND DEADFRONT REMOVED

VIEW SHOWN WITH LOWER COVER REMOVED

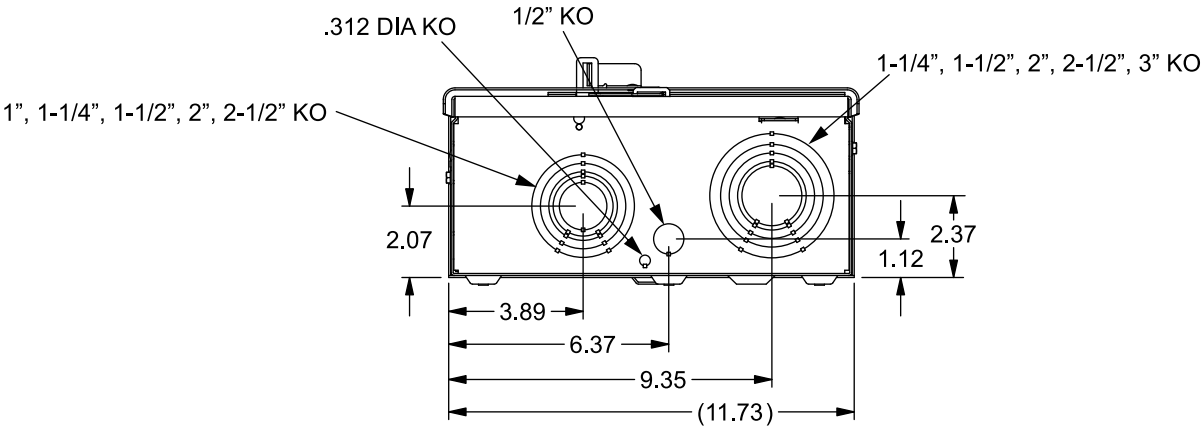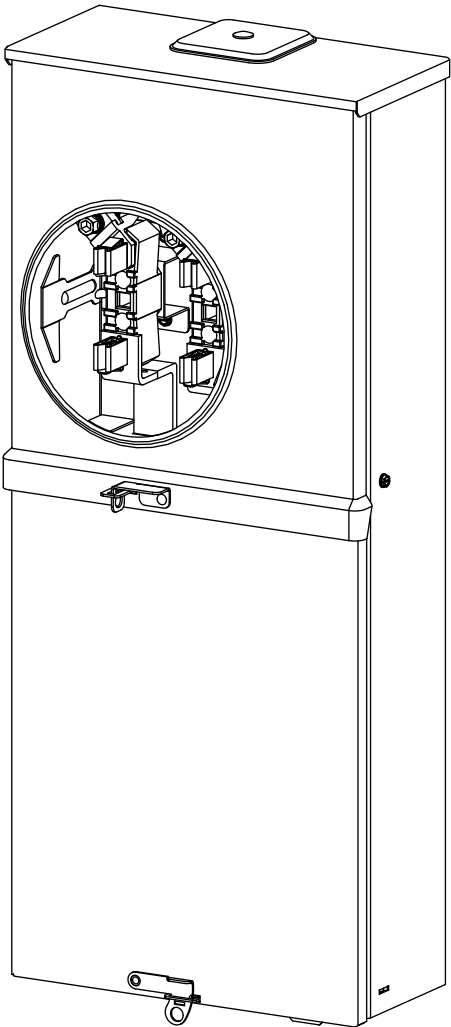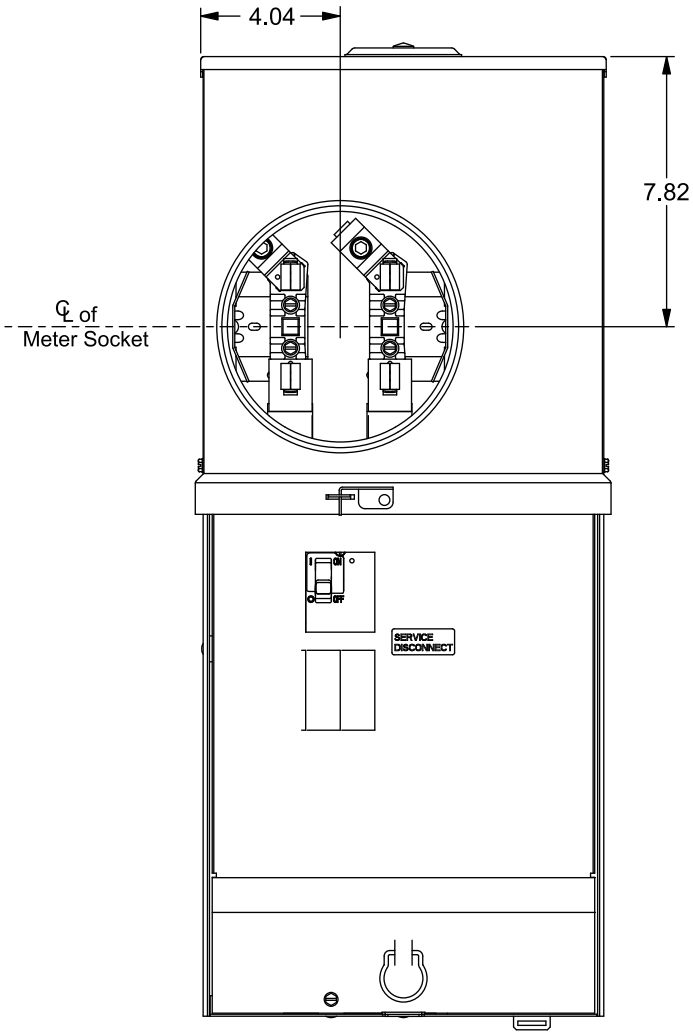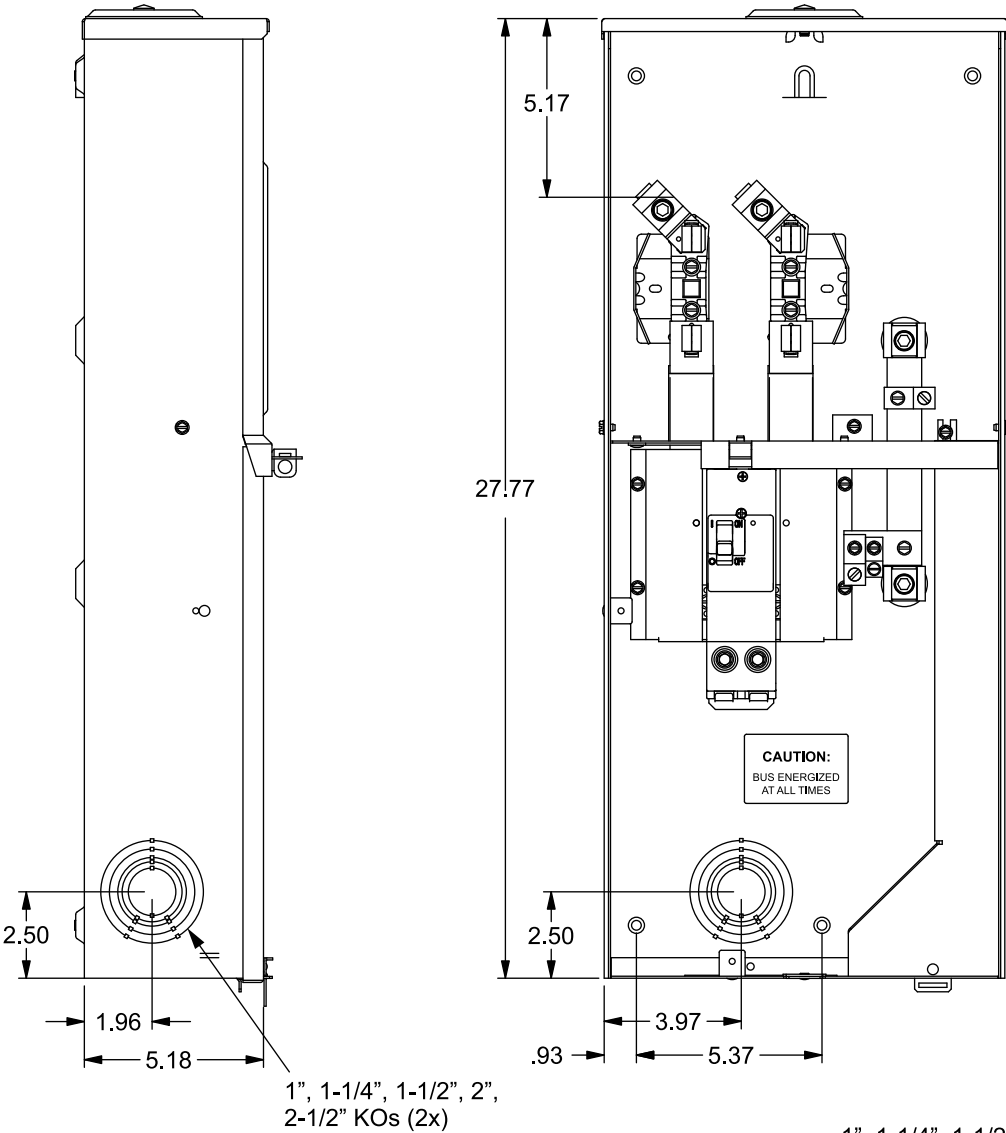

© 2020 Copyright Siemens Industry, Inc.

TALON

Outdoor Combination Metering

Description: 200A Breaker, Ringless, 4 Jaw,
OH/UG Service, Painted Steel Enclosure

KAM 12/9/20 DO NOT SCALE DRAWING Dwg No: UAB417-200