



## Sika® Level Self-Leveling Underlayment

### Surface - Sika Level Primer

Seal surface and promote adhesion to the Sika® Level Underlayment.

- Fast drying & requires no dilution
- Reduces outgassing and the formation of bubbles in your underlayment
- Prevents water loss from the underlayment to the substrate, improving crack resistance



### Mixing

Mix for a minimum of **3 minutes** or until a uniform mixture is achieved.




### Application

Pour mixture immediately onto your surface. You have an extended working time of approx 30 min.



### Level

Can be walked on it **2 to 3 hours**.

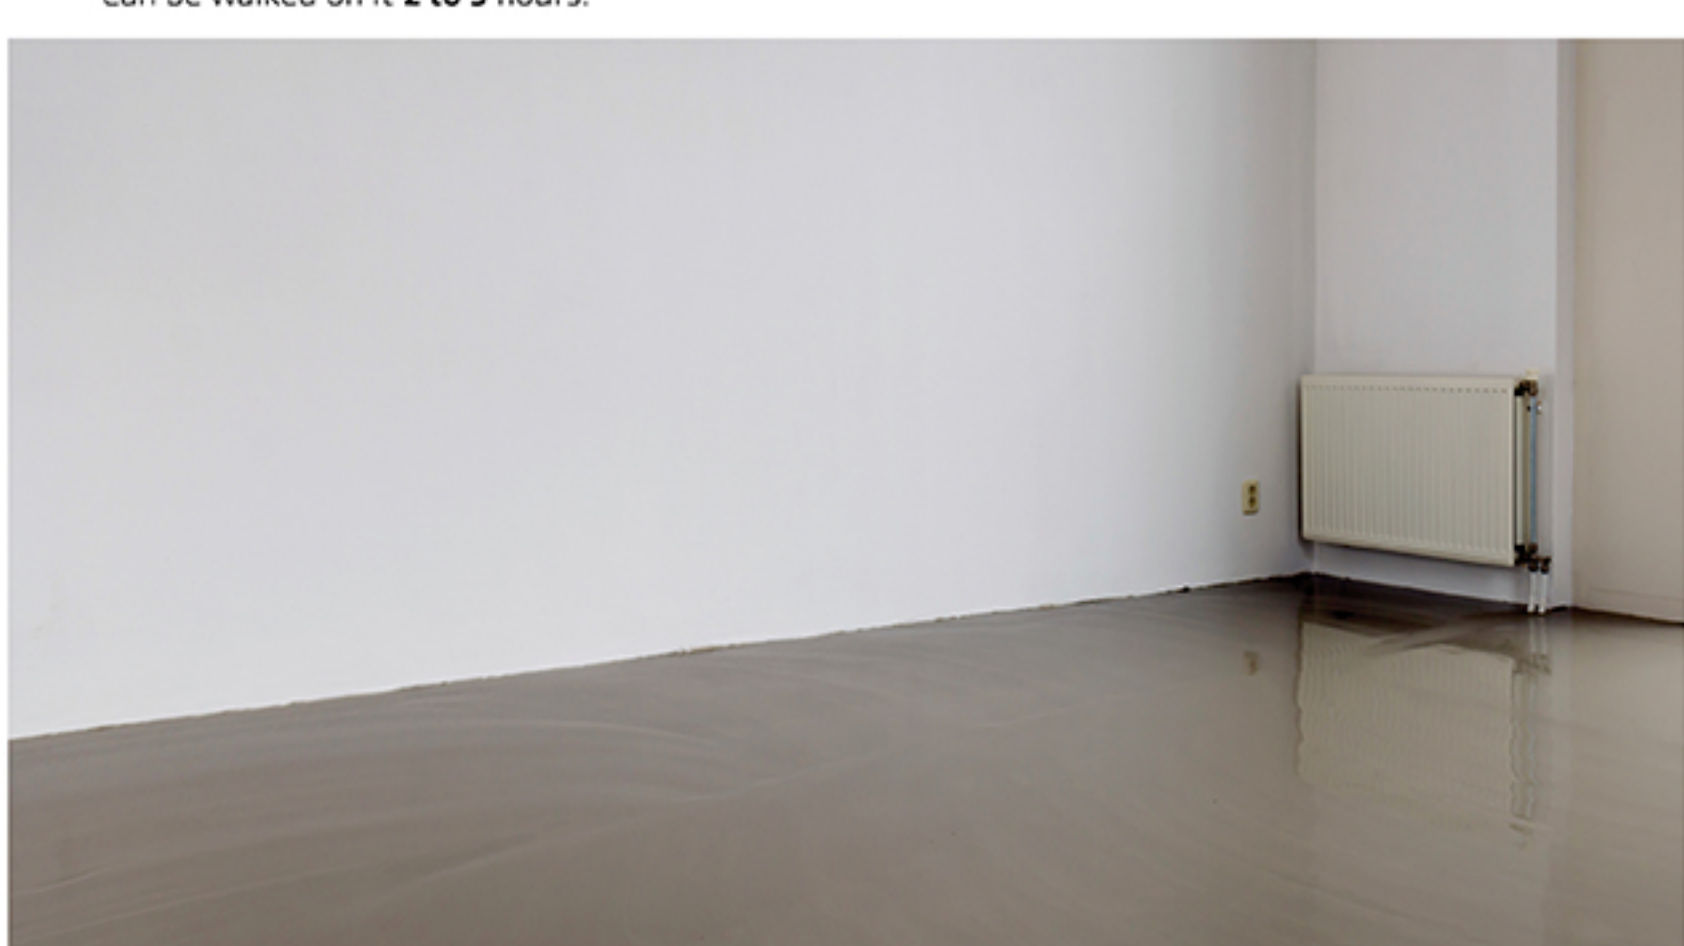

### Floor Installations

