

sunlite®

INSTALLATION INSTRUCTIONS

LED WALL SCONCE FIXTURE | 88685-SU LFX/WS/30K/6W/LT/BN/8"
LED WALL SCONCE FIXTURE | 88685-SU LFX/WS/50K/6W/LT/BN/8"


Please read and understand this entire manual before attempting to assemble, operate or install the product.

WARNING: Avoid fire or electric shock. Follow installation instructions carefully. If unsure about electrical installation, consult a qualified electrician. Wear rubber-soled shoes and work on a sturdy wooden ladder. Ground fixture to avoid potential electric shock. Handle metal parts carefully to prevent cuts. To avoid a hazard to children, account for all parts and destroy all packing materials.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Turn off the power at fuse or circuit breaker box before installation and maintenance. NOTE: This fixture is suitable for 120Volts fused circuit. Fixture must be installed according to National Electric Code and local building codes. If you are unsure about wiring, consult a qualified electrician. Suitable for wet Locations.

Introduction




Part	Item Name
A	LED WALL SCONCE FIXTURE
BB	Wire Nuts
CC	4X30MM Screws

Before beginning assembly and installation of product, make sure all parts are present. Compare parts with package contents list and diagram above. If any part is missing or damaged, do not attempt to assemble, install or operate the product. Contact customer service for replacement parts.

MIN 75°C SUPPLY CONDUCTOR



Installation

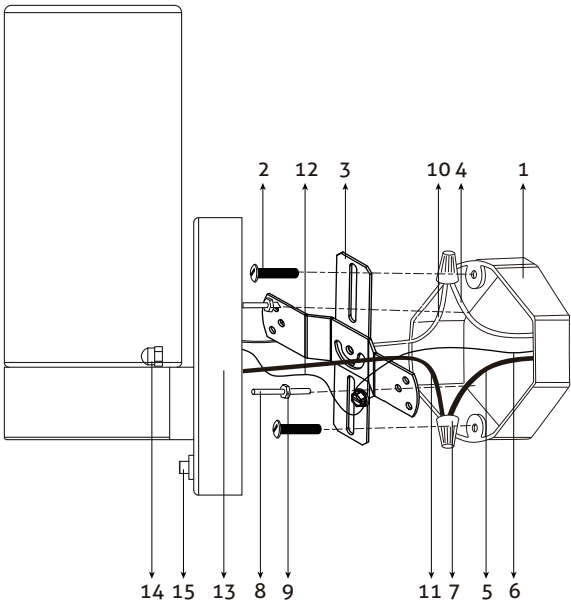

- 1. OUTLET BOX (NOT INCLUDED)
- 2. MOUNTING SCREW
- 3. MOUNTING BRACKET
- 4. WHITE SUPPLY WIRE
- 5. BLACK SUPPLY WIRE
- 6. SUPPLY GROUND WIRE
- 7. WIRE NUT
- 8. #8-32 FIXTURE SCREW
- 9. WASHERS
- 10. WHITE FIXTURE WIRE
- 11. BLACK FIXTURE WIRE
- 12. FIXTURE GROUND WIRE
- 13. BACK PLATE
- 14. CAP NUT
- 15. ON/OFF SWITCH

WARNING :

Make sure power is off before installing or servicing any part of this fixture.

1. Screw the fixture screws (8) into the mounting bracket (3)
2. Pull the power supply wires out from the OUTLET BOX (1). Attach the mounting bracket (3) to the outlet box (1) using mounting screws (2).
3. Make wire connections, connect the black supply wire (5) to black fixture wire (11), white supply wire (4) to white fixture wire (10) and the fixture ground wire (12) to supply ground wire (6) using wire nuts (7). Wrap all wire connections with electrical tape for secure connection.
4. After wires are connected, tuck them carefully inside the outlet box. Position back plate (13) over the outlet box and feed fixture screws (8) through two holes of the back plate until they protrude out from the back plate approximately 1/4" and secure using two cap nuts (14) with washers (9).
5. After installing the fixture, caulk upper 3/4 of wire connection enclosure to mounting surface. Leave bottom 1/4 un-caulked for drainage of any water that might leak into the enclosure. The manufacturer recommends a non-drying exterior caulking material. A good example is a clear silicone rubber sealant for exterior use.

Sunshine Lighting Company

744 Clinton Street Brooklyn, NY 11231, USA

T. 718.768.7000

F. 718.768.0970

www.sunlite.com