



# **Archer®**

66" x 32" alcove bath, left drain **K-1948-LA** 

#### **Features**

- Comfort Depth® design offers a convenient 19" step-over height while retaining the same depth as a standard 21" bath
- Integral lumbar support
- Slotted overflow allows for deep soaking
- Integral apron
- Integral flange helps prevent water from seeping behind wall and simplifies alcove installation
- Textured bottom surface
- Coordinates with other products in the Archer collection

#### Material

Acrylic

## Installation

- Left drain
- Alcove

## **Required Products/Accessories**


K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

#### **Recommended Products/Accessories**

K-23726 Drain treatment



# ADA

#### Codes/Standards

CSA B45.5/IAPMO Z124 ADA ICC/ANSI A117.1

# **KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty**

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	95	Ice™ Grey
	7	Black Black™








# **Archer®**


66" x 32" alcove bath, left drain K-1948-LA

No change in measurements if connected with drain illustrated. (K-7272)



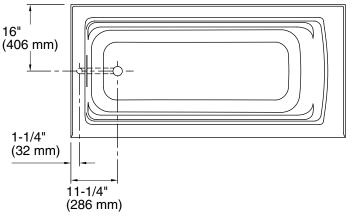

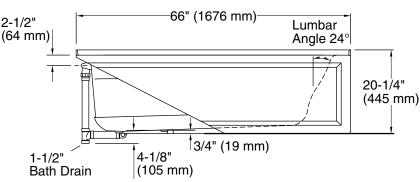



## **Technical Information**

All product dimensions are nominal.

**Drain location:** Left

Basin area, bottom: 50-3/8" x 19-5/8" (1280 mm x 498 mm)

57-5/16" x 24-1/16" (1456 mm x Basin area, top:

611 mm)

Weight: 80 lbs (36.3 kg)

Minimum floor load: 45 lbs/ft2 (219.7 kg/m2) Water depth: 15-5/16" (389 mm) 66 gal (249.8 L) Water capacity: 2-5/8" (66 mm) Minimum flat for

door:

#### **Notes**

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

ADA compliant when installed to the specific

requirements of these regulations.

