




Item Number: A03513

WARNING (To reduce the risk of fire, electric shock, or injury to persons):

1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the “**OFF**” position. B). Place the wall switch in the “**OFF**” position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4” larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16” should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **40W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

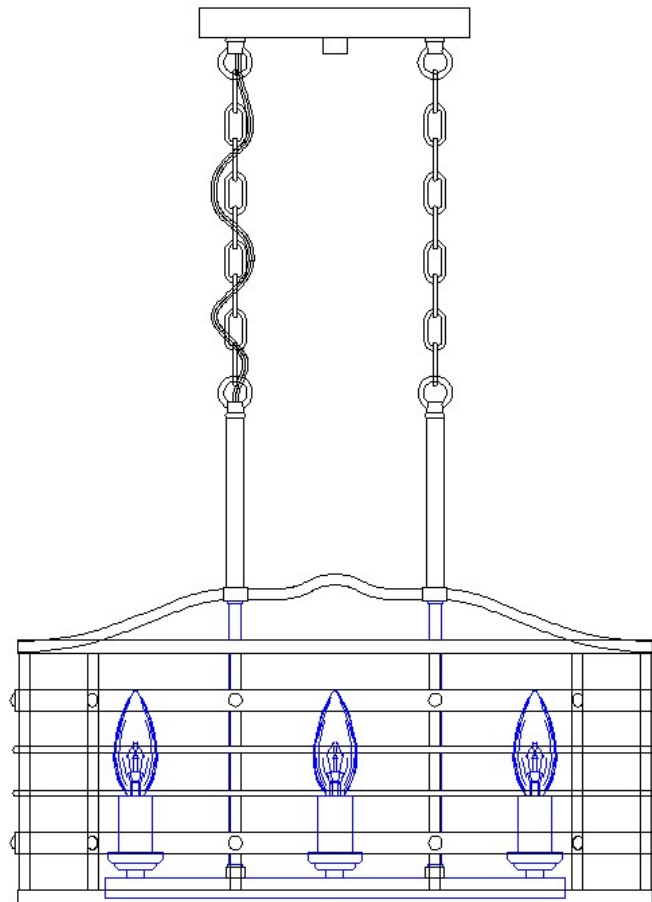


**TOOLS REQUIRED (NOT INCLUDED):**

Before doing assembly and installation please prepare the needed tools as below picture

Ladder	Phillips head, flat blade screwdriver	Electrical tape	Pliers	Wire cutter/Stripper

PARTS TYPE & QTY INCLUDING:

- (A) Hex nut (1)
- (C) Nipple (1)
- (E) Single bar (1)
- (F) Green ground screw (1)
- (G) Canopy (1)
- (H) Loop (4)
- (I) Decorative finial (1)
- (J) Quick link (4)
- (K) Chain (2)
- (L) Tube (2)
- (M) Fixture body (1)

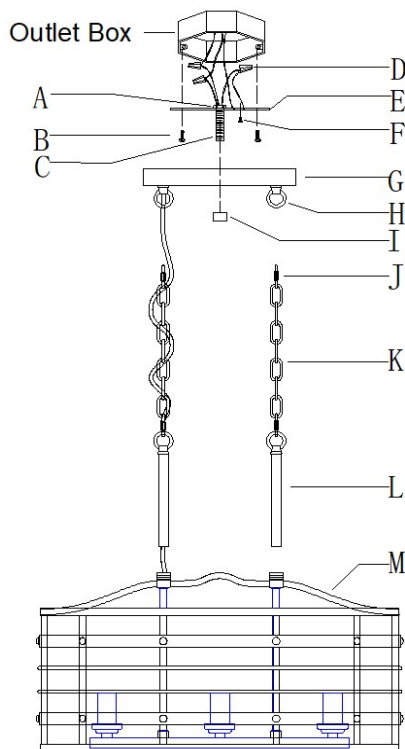**ACCESSORIES & QTY ENCLOSED:**

- (B) Mounting screw (2)
- (D) Plastic wire connector (3)

ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration.

2. Turn off power

Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.

3. Make single bar E installation

A1 CEILING&OUTLET BOX	A2 CEILING&OUTLET BOX	A3 CEILING&OUTLET BOX	A4 CEILING&OUTLET BOX
---	---	---	---

Step A1: Attach the single bar E to the outlet box with the head of the green ground screw facing you. Secure it with mounting screws B, tighten until snug




Step A2/A3: Place the canopy G over the nipple against the ceiling to determine the correct position of nipple C should be screwed through the single bar E.

Note: The canopy (G) should be snug against the ceiling and the exposed threads at the bottom of canopy G should be at least 6 threads for more secure hanging .If not, adjust the nipple (C)on the single bar assembly by screwing in or out of the single bar (E) until the length is achieved, then tighten the hex nut A

Step A3: Tighten the hex nut A to secure single bar E in place.

4. Make assembly

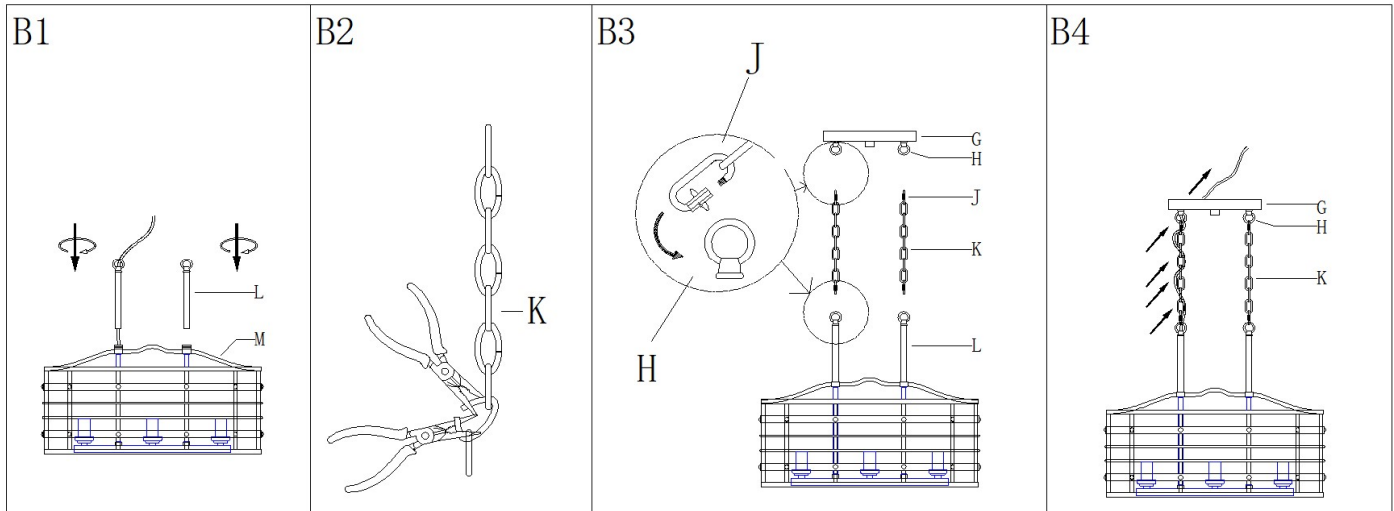


Step B1: Slip the tube (L) along wires then thread onto the nipple of top fixture body (M) till snug, thread another tube (L) onto the nipple of top fixture body (M) till snug.

Step B2: By measuring, determine the correct number of links needed for proper hanging height. Using the chain pliers, disconnect and discard the remaining chain.

Step B3: Attach the quick links (J) to connect the chains (K) and the loops (L) of the canopy (G) and tubes (L)

Step B4: Carefully lace the wires through the chain (K) (every other link) and stop just before you reach the top of canopy (G).

5. Make installation

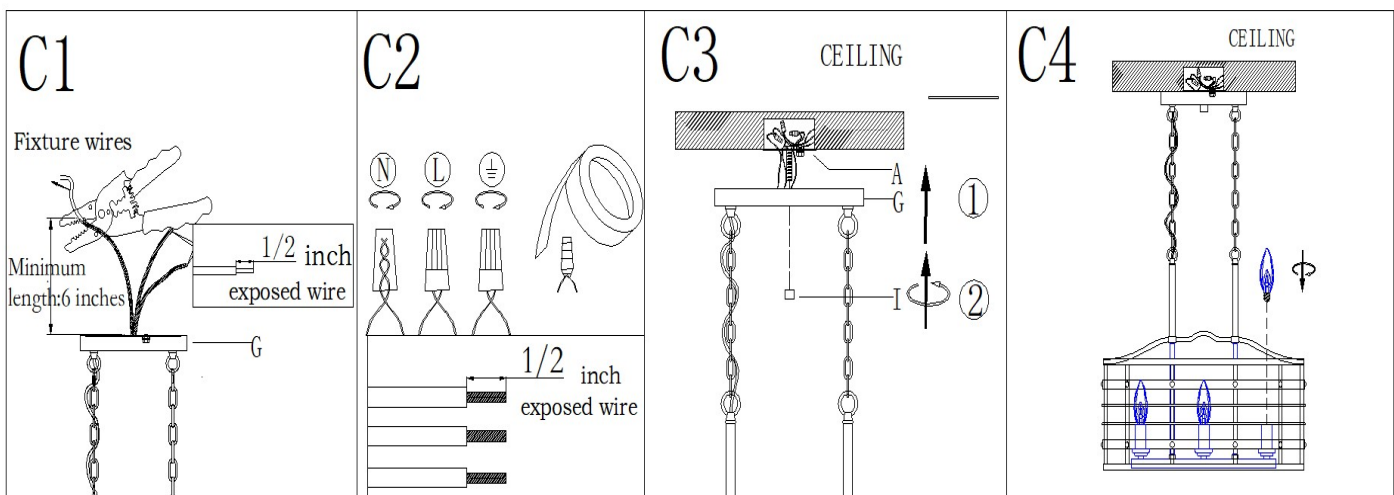


Step C1: If needed, cut off the wires length of fixture. At this point, the remaining wire length measured from the top center of canopy G is at least 6".

**Step C2: Make wire connections**

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR COLOR OF FIXTURE ,NEVER CONNECT WIRES TO GROUND WIRES**

Connect ground wire according to below chart

Connect wires according to below chart

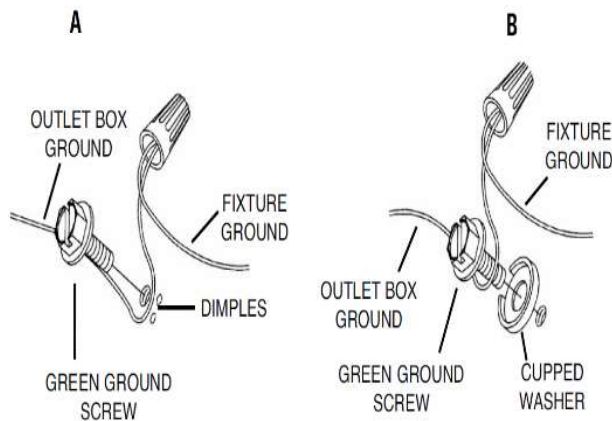

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)

Neutral Wire

Twist plastic wire connector(D) until wires are tightly joined together,wrap each connector with approved electrical tape for more secure connection, then carefully stuff all wires into the outlet box.

Step C3: Raise canopy (G) to ceiling and secure canopy (G) in place by tightening decorative finial (I) onto nipple.

Step C4: Install bulbs (not included) (Please do not exceed the maximum capacity recommended on the socket.)

6. Check everything is already installed properly, then you could turn on the light. Enjoy!

CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.