



Ducted under cabinet range hood, constructed of premium stainless steel to deliver elegance and easy cleaning. stainless steel baffle filters with handles and grease collector that remove odors and grease from your cooking area and are dishwasher safe. Low noise level operation provides quiet while 330 CFM This model also comes with 2 bright energy saver LED lights and 3-level fan speed push button. Winflo patented QUICKINSTALL hardware is included to make one person installation a breeze.


SIZE	STAINLESS	BLACK
30"/36 in.	LRU12B30DHP/LRU12B36DHP; LRU12B30DP; LRU12C30DHP, LRU12C30DP	LRU12B30DHPB; LRU12C30DHPB

### Specifications

Description	30"/36" 330 CFM Max Velocity Ducted Under Cabinet Range Hood
Mount Type	Under Cabinet
Size	29.5"/35.5" W x 22" D x 9.8" H
Duct Dimension	6" or 7" round
Product Weight	32/35 lbs.
Exhaust Method	Ducted
Exhaust Location	Top
Power Source	Hardwired
Voltage	120
Amperage	1.5 A
Residential Use	Yes
Commercial Use	No
Certification	ETL (compatible w/UL and CSA)
Filter	Baffle Filters
No. of Fan Speeds	3
Speed Control Type	Push Button
Max. Sound Level	65 dB
No. of Lights	2 LED
Bulb Wattage	2 W
CFM	330 (Max Velocity)
Grease Collector	Included
Installation Hdwe. Incl.	Yes (Easy Installation Hardware)

### Warranty


3-Year Limited on parts

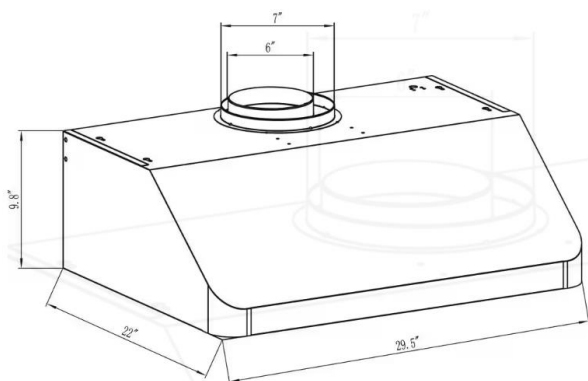

### Scene Display



### Plot of Static Pressure vs. Airflow

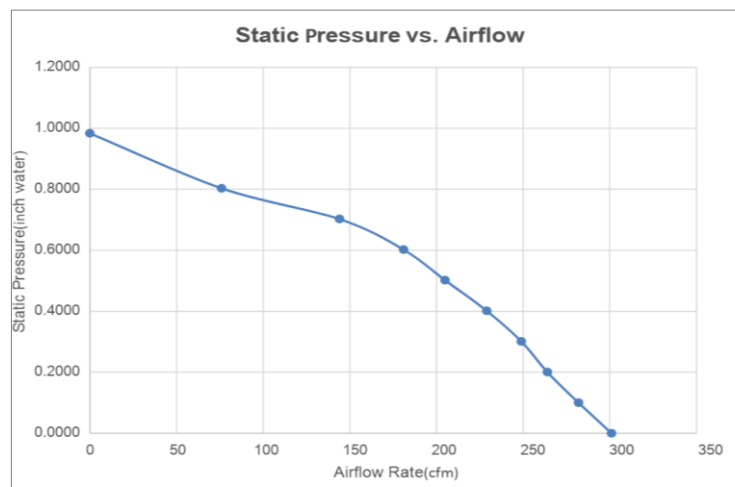

\* Max velocity CFM of blower measure in open air environment\*



TEL: 630-401-8050  
E-Mail: support@winslyn.com

ADD:1850 East Fabyan Parkway Batavia, IL 60510

Website: <https://www.winslyn.com>  
Company: Winslyn Industries, LLC