



Instruction Manual

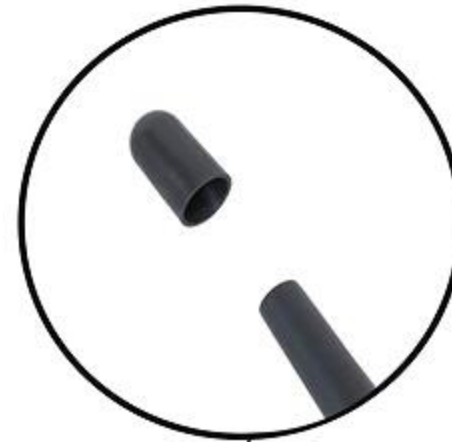

3. Insert tube A into seat tube A
Insert tube B into seat tube B

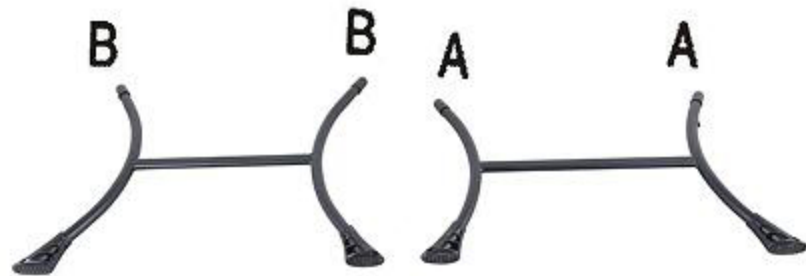


1. Front leg tube (A)
Back leg tube (B)



2. Take off plastic cap before assembling



4. Buckle the crossbar,
Zipper the back fabric

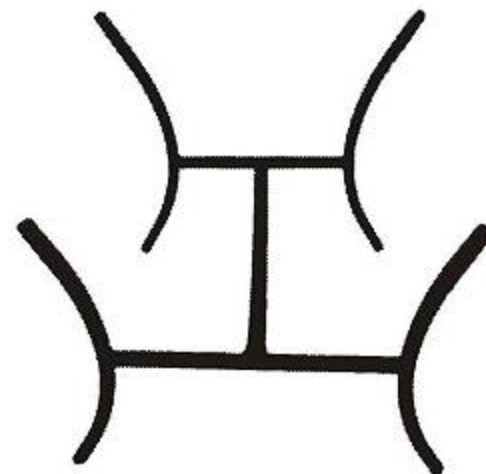

5. Put the supporting tube in
front and back crossbars slot



6. Tie the fabric ties to cross bar

