

ASSEMBLY INSTRUCTIONS



CAUTION

◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

◆ Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver



Flat blade screwdriver




Pliers



Wire strippers


HARDWARE INCLUDED



Fixture



Canopy



Chain



Monuting Unit



Ball Nuts




Mounting Scrwes



Wire Nuts

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


EXPLODED PARTS

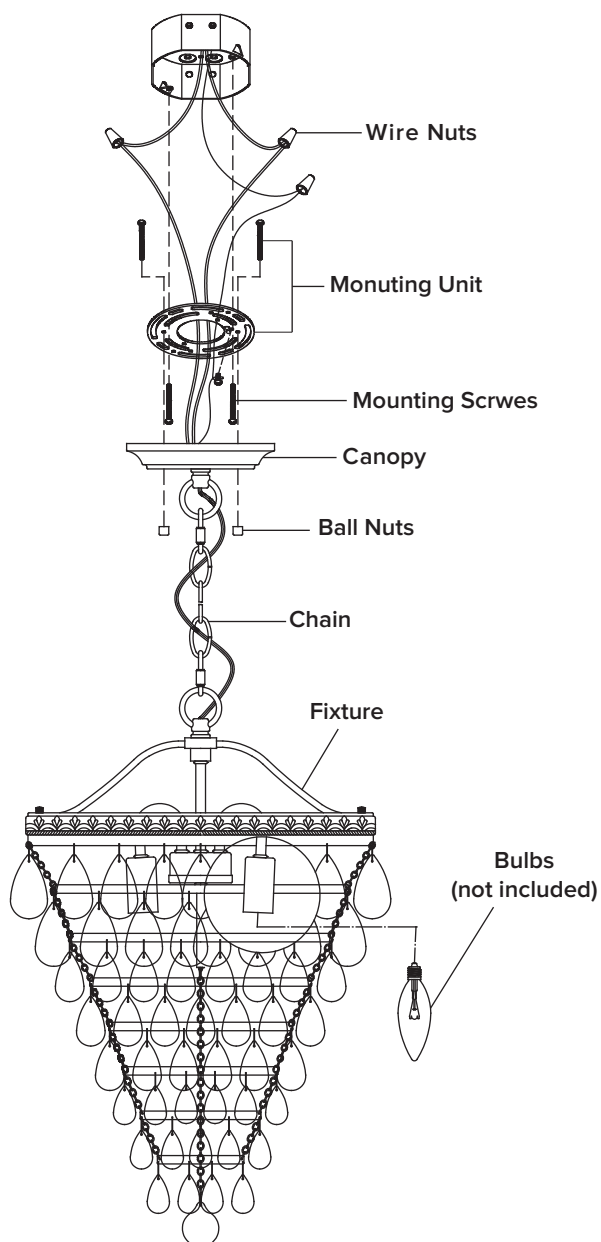

INSTALLATION



STEP 1

Unscrew the **ball nuts** from the **mounting unit**. Use the **mounting screws** to attach the **mounting unit** to the junction box.

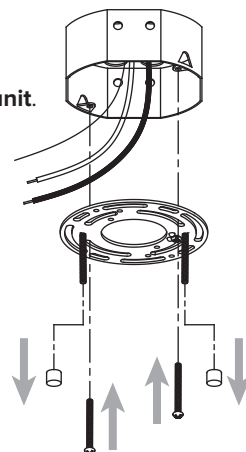

STEP 2


1. Choose the length of the **chain** you need (Open the chain using a phillips screwdriver (not included) and pliers (not included).)
2. Open the quick link. Then attach it to the **fixture**. Close the quick link.

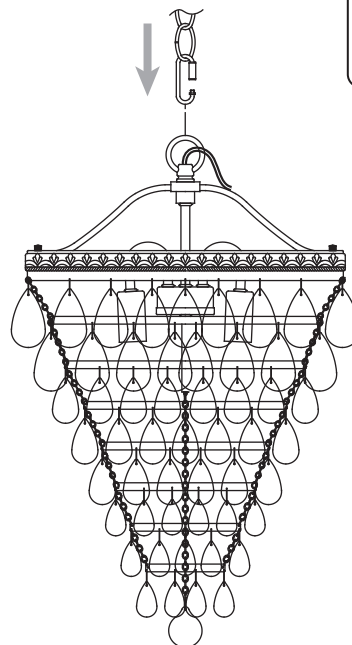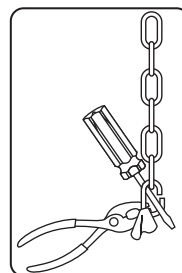

ASSEMBLY INSTRUCTIONS (INSTALLATION)



STEP 3

1. Weave the fixture wire and the fixture ground wire through the **chain** and **canopy**.
2. Open the quick link. Then attach it to the **canopy**. Close the quick link.

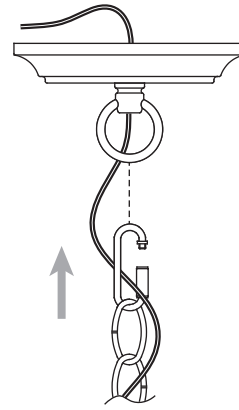


STEP 4

Make the electrical connection from the junction box to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.

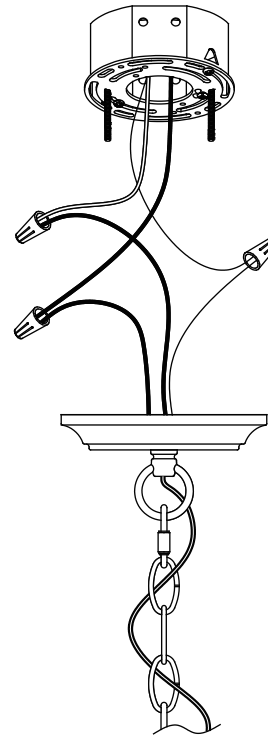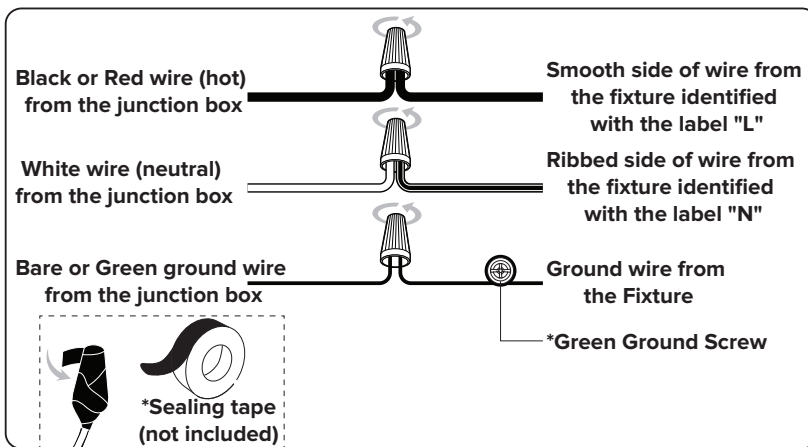

STEP 5

Attach the **canopy** to the **mounting screws** through screw holes as shown, and secure it with **ball nuts**.

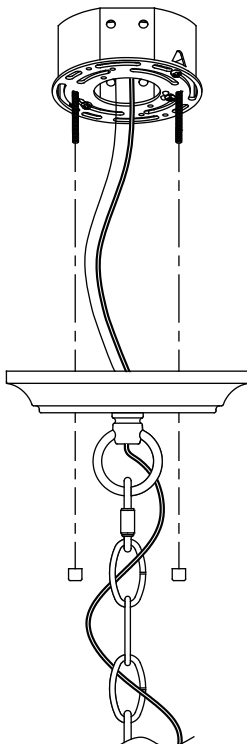

STEP 6

Install bulbs (not included)

