ASSEMBLY INSTRUCTIONS




- ◆ Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.



If you need further assistance, please contact us by Email: customersupport@superiordecorinc.com

TOOLS REQUIRED



HARDWARE INCLUDED


















Canopy Screw Collar Ring

Mounting Unit

Mounting Screws

Wire Nuts


*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE





STEP 1


Use the **mounting screws** to attach the **mounting unit** to the junction box (not included).







 Choose the length of the **chain** you need (Open the chain using a phillips screwdriver (not included) and pliers (not included).

2. Attach the end of the **chain** to the **fixture**.



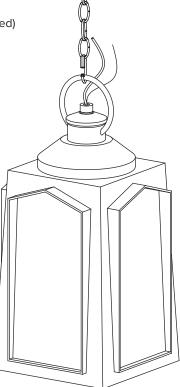


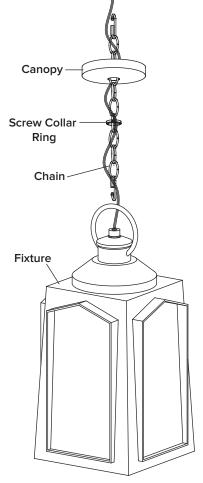

ASSEMBLY INSTRUCTIONS (INSTALLATION)


STEP 3


- Pass the chain and the branch wires through the screw collar ring and canopy.
- 2. Attach the end of the **chain** to the **mounting unit**.
- 3. Feed the branch wires through the pipe nipple on the **mounting unit**.

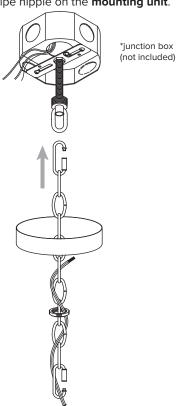

STEP 4

Make the electrical connection from the junction box (not included) to the **fixture**. Connect the ground wire to the **mounting unit** using the preinstalled green ground screw. Next, connect the positive, negative and ground wires with the supplied **wire nuts**. Secure with electrical tape.



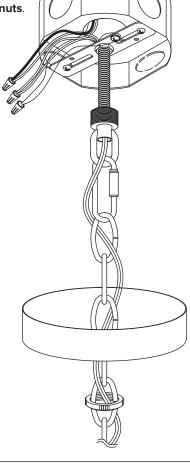

STEP 5Secure the **canopy** to the **mountring unit** with the **screw collar ring**.

