

One-light Wall Bracket

Wall mounted • Wet location listed



Description:

Experience a one-of-a-kind lighting experience with this LED wall sconce. This other wordly light fixture features a circle within a circle structure mimicking the design of planets circling in our solar system. When illuminated, the wall light produces a stunning eclipse-inspired glow much like when the moon quietly passes in front of the Sun.

Specifications:

- Oil Rubbed Bronze (-108) (Painted)
- Aluminum Construction
- Etched Glass Shade
- Experience a one-of-a-kind lighting experience with this LED wall sconce.
- This other wordly light fixture features a circle within a circle structure mimicking the design of planets circling in our solar system.
- When illuminated, the wall light produces a stunning eclipse-inspired glow much like when the moon quietly passes in front of the Sun.
- Ideal for any hallway, foyer, bathroom, foyer, sitting room, living room, or stairway.
- Perfect for transitional, modern, or contemporary settings.
- Measures 12-inch width by 12-inch height.
- Uses one integrated LED bulb (9w max).
- Able to be fully dimmable with dimmable bulbs.
- Includes installation instructions and mounting hardware.
- Progress Lighting products are designed for exceptional quality, reliability, and functionality.
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting Mounting Strap for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	9w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	670/71 (LM-82)
Lumens/LPW (Delivered)	/
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-30 °C
Warranty	5-year limited warranty
Labels	cCSAus Wet location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

P560132-108-30

Images:



Dimensions:

Width: Depth: 2-3/16"
Height: 12"
H/CTR: 6"

Width: 3-1/2"
Height: 3-1/2"

One-light Wall Bracket

Wall mounted • Wet location listed **PROGRESS LED**



Photometrics:

P560132-108-30

ELECTRICAL DATA		P560132-108-30
Input Voltage	120 V	
Input Frequency	60 Hz	
Input Current	0.079	
Input Power	9	
Power Factor	Greater than 0.90	
THD	<20%	
FCC	FCC Title 47, Part 15, Class B	
Operating Temperature	-30 °C to	
Dimming	Yes*	

*See Dimming Notes for more information

P560132-108-30


LED Light Engine: 3000 K 90 CRI

System Wattage: 9

Fixture delivered lumens: 88

Fixture Efficacy: 9.3

Spacing Criteria:

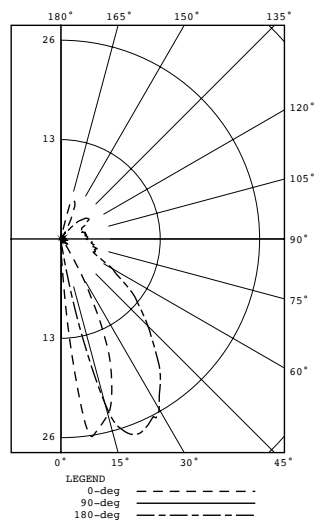

One-light Wall Bracket

Wall mounted • Wet location listed



P560132-108-30

Dimming Notes:

P560132 is designed to be compatible with many Triac/ELV controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Leviton SureSlide 6672

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYLV-600P

Lutron NOVA T NTLV-600

lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Lutron Nova N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.