

# IMPORTANT UNFINISHED DOOR INFORMATION

In case of questions or missing parts, please contact



✉ [aftersaledoor@outlook.com](mailto:aftersaledoor@outlook.com)

- It is important that you properly finish this wood door to extend its lifespan. After you have removed the door from its carton, it's recommended to be finished and sealed on all six sides ideally within 24 hours. Sealing the door properly will prevent door movement, such as warping and twisting

---

## Best Practice for Paint or Stain

- Do not clean with solvents or commercial cleaners as they may damage the finish and / or distort the natural texture of the wood. When cleaning, wipe with a damp cloth or sponge. For persistent stains, try baking soda and water in small test area before attempting to remove the stain.
- Immediately clean spills with terry cloth or micro fiber to avoid damaging the surface. Do not use any hard tools or such that may scratch the surface, including pressure washers.
- For painted doors, a good quality oil based primer and oil based paint to be used in finishing. Consult a paint professional where you purchased this door for their recommendations. Typically sanding the entire door with 220 grit sandpaper, then applying two coats of your desired finish is adequate to get your desired finish.
- For stained doors, a high quality water-based or oil-based stain is recommended. Follow the stain manufacturer's instructions, and do not thin the stain with any chemicals or water. In a high humidity environment use an oil based stain.
- **BE SURE TO FINISH ALL SIX SURFACES.** Your door, as typical of all wood products, is subject to swelling and shrinkage when changes occur in temperature and the relative humidity in your home.
- Inspect your door's finish at least once a year and re-finish as necessary, clean only twice a year or as needed.

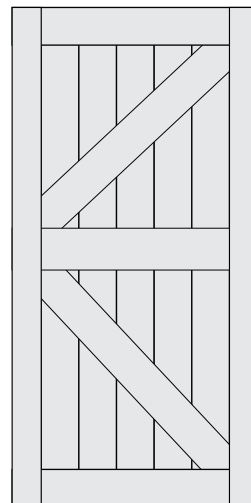

We advise that the door is acclimatized in the room you plan to install the door for 24 hours.