

Juvenile™ Ultra

Elongated, Floor Mount, Flushometer Bowl K-96059

Features

- Elongated bowl, Juvenile height bowl.
- 1-1/2" top spud.
- Trap passageway 2-1/8".
- 10" x 7" water surface size .
- Also available with antimicrobial finish K-96059-SS.

Material

Vitreous china.

Technology

- Designed to outperform competitors in bowl cleanliness and plug resistance.
- Maximum waste removal.
- Engineered for toilet seat cover removal.
- Excellent bowl rinse.
- Engineered to flush effectively in buildings with low supply pressure and flow.
- Maximum drain line carry at all flush volumes per ASME Standard.

Installation

- 25-15/16" L x 14-5/8" W x 13-3/4" H
- 10" or 12" rough-in.
- Meets ADA and Texas Accessibilty Standard (TAS) height requirements for elementary school children, 5 through 8 years of age (12" to 15" to the top of the seat).

Water Conservation & Rebates

- 1.1 to 1.6 gpf flush range (1.1, 1.28 and 1.6 gpf).
- WaterSense compliant when used with a 1.1 or 1.28 gpf WaterSense flushometer.

Components

Additional included component/s: Spud, and Bolt Cap Accessory Pack.





ADA CSA B651

1 OBC

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 Texas Accessibility Standard (TAS) CSA B651 OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color Code Description


0 White





Juvenile™ Ultra

Elongated, Floor Mount, Flushometer Bowl K-96059

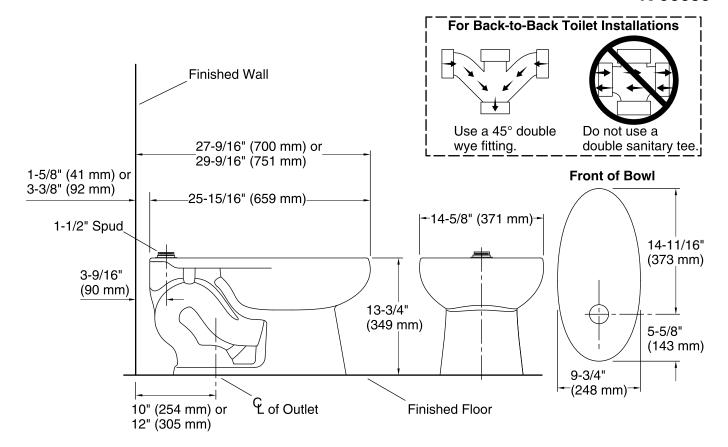

Technical Information

All product dimensions are nominal.

Toilet type: Flushometer, Floor-mount

Waste Outlet: Floor

Bowl shape: Elongated front

Flush type: Flushometer valve siphon

Spud size: 1-1/2", Inlet, Top Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.1 gpf (4.3 lpf) or 1.28 gpf (4.8 lpf)

or 1.6 gpf (6 lpf)

Water surface size: 10" x 7" (254 mm x 178 mm)

Rim to water surface: 6" (152 mm)

Rough-in: 12

Seat-mounting holes: 5-1/2" (140 mm)

Fixture Supply Requirements

Min static pressure: 35 psi (241.3 kPa)
Max static pressure: 80 psi (551.6 kPa)
Min flowing pressure: 25 psi (172.4 kPa)
Min flow rate: 25 gpm (94.6 lpm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Requires flushometer valve to match desired water consumption 1.1 gpf (4.3 lpf) or 1.28 gpf (4.8 lpf) or 1.6 gpf (6 lpf).

ADA, OBC, CSA B651, TAS compliant when installed to the specific requirements of these regulations.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

Accessibility standards may require controls to be located on the open side of the toilet.

