

# ECL1 LED Exit sign Combo

The ECL Series LED Emergency Exit Combo features an attractive low profile design to fit any environment. This series is available in white and offers universal mounting with testing button, Ni-Cad battery with remote capabilities, and is damp location listed. The ECL Series generates only 1.2 watts per lamp head, making it a perfect energy savings solution.

## Construction

- Injection molded thermoplastic ABS housing
- UL-94 V-0 flame rating - Flame Retardant
- Red or Green text options available
- 6" Letter Height
- Double Face Configuration

## Electrical

- 1.2 Watts per head
- 120/277 Dual Voltage Operation
- LED Indicator Light & Push Button Test Switch
- Minimum 90 minute capacity on emergency mode (including remote heads)
- Operating temperature: 32°F - 104°F (0°C - 40°C)

## Installation

- Universal mounting plate with EZ quick connect
- Damp Location Rated

## Listings


- Meets FCC Part 15, Subpart B, Class B standards for conducted and radiated emissions



**±45° TILT WITH 330° ROTATION**  
**±90° SWING**



Compatible with Remote Heads: ERL1|2 ERL3|4

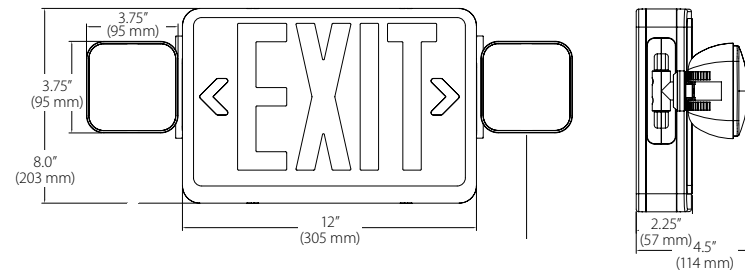

| Product Information |                    |
|---------------------|--------------------|
| Input Voltage (VAC) | 120/277            |
| Power Draw (W)      | 4.2                |
| Emergency Operation | Minimum 90 Minutes |




# Applications



The ECL series can be installed in many applications such as hospitals, event venues, conference spaces, and more.

# Installation

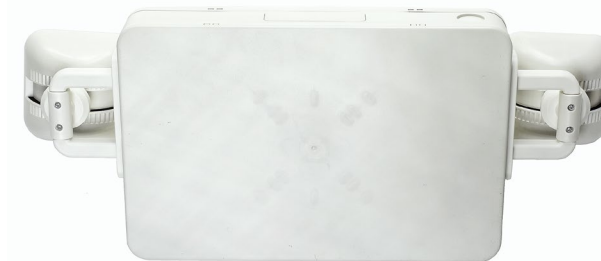

The ECL1 installs with a universal mounting plate with EZ quick connect, for a quick and easy installation.



The ECL1 has adjustable lamp heads with the exit sign available in green or red.

| Ordering Information |          |                  |               |                        |
|----------------------|----------|------------------|---------------|------------------------|
| Series               | Version  | Voltage          | Housing Color | Lettering              |
| ECL1                 | 10 (1.0) | UNV (120/277VAC) | WH (White)    | R-2 (red)              |
|                      |          |                  |               | G-2 (green)            |
|                      |          |                  |               | R-2-R (red w/remote)   |
|                      |          |                  |               | G-2-R (green w/remote) |