

DESCRIPTION

- Metal construction with Chrome plated or Classic Brushed Nickel (CBN) finish
- Pressure balancing cycle valve design with 1/4 turn stops
- 3 function transfer valve
- 1/2" CC connections
- Contains: stationary showerhead, hand-held shower with non-positive pause, 69" metal hose, 30" slide bar, drop ell, vacuum breaker

Slide bar is NOT DESIGNED TO BE A GRAB BAR

- Applicable components are supplied with vandal resistant screws

OPERATION

- Temperature and transfer valves both have ADA compliant lever style handles
- Temperature handle operates counterclockwise through a 270° arc with off at 6 o'clock, and the maximum hot at the 9 o'clock position
- Adjustable temperature limit stop
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 2^\circ$
- Transfer valve operates 3 distinct functions

FLOW

- ☐ **T8342** (2.5 gpm/9.5 L/min) - Chrome finish
- ☐ **T8342CBN** (2.5 gpm/9.5 L/min) - Classic Brushed Nickel finish
- ☐ **T8342EP15** (1.5 gpm/5.7 L/min) - Chrome finish, **WaterSense®** certified
- ☐ **T8342EP15CBN** (1.5 gpm/5.7 L/min) - Classic Brushed Nickel finish, **WaterSense®** certified

CARTRIDGE

- Pair with a brass Posi-Temp rough-in valve:
- 8370HD*: 1/2" CC connection without integral stops
- 8371HD*: 1/2" CC connection with integral stops
- 8372HD*: 1/2" IPS connection with integral stops
- 8373HD*: 1/2" PEX connection with integral stops
- 8374HD*: 1/2" CPVC connection with integral stops
- 8375HD*: 1/2" UPONOR connection with integral stops
- *Includes the 1222HD Brass Posi-Temp Cartridge
- Nonmetallic/nonferrous and stainless steel materials
- Also requires the 3360 3 function transfer rough-in valve
- Accommodates back to back installations


STANDARDS

- Third party certified to: WaterSense® (only applies to 1.5 gpm), ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

- **ADA**  for lever handles

WARRANTY


- Warranted for 5 years against material or manufacturing defects

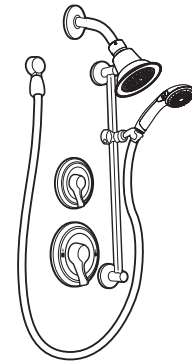

Three-Function Commercial Shower System



Certified by
IAPMO R&T
EP Models Only

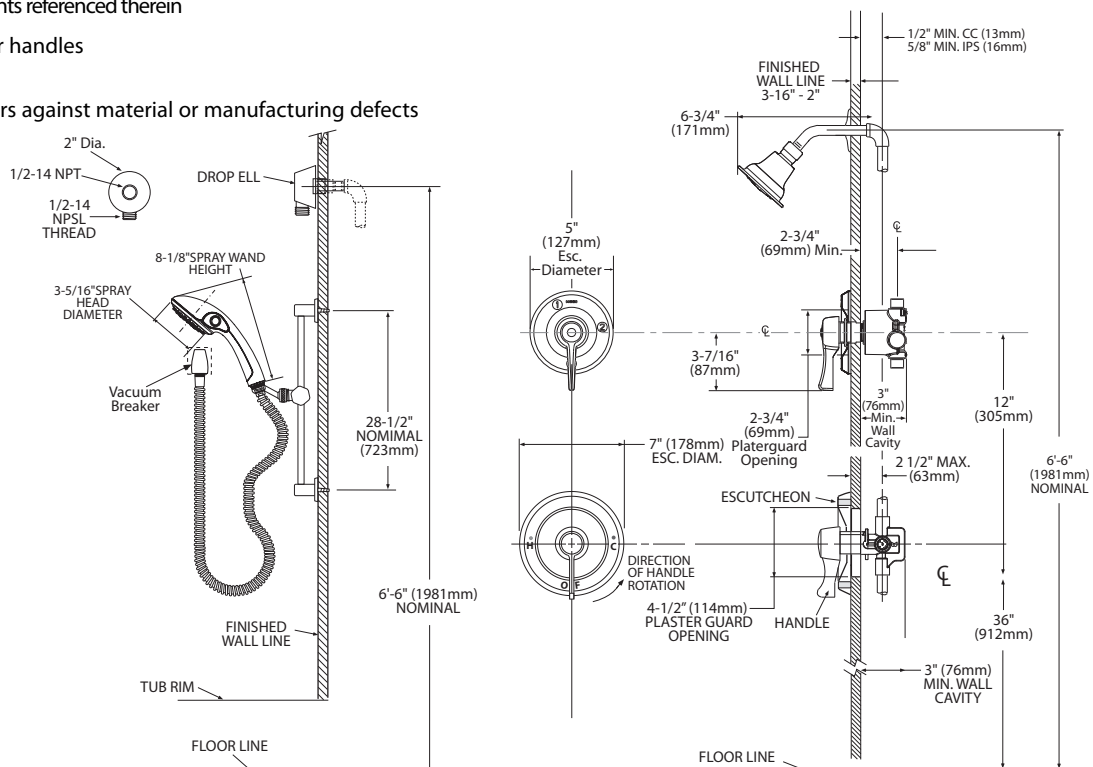

NOTE: This valve is not intended to be used as a shut-off valve. To prevent the potential of cross flow, check valves must be integral to the supply valve or installed in both hot and cold water supply lines.

CRITICAL DIMENSIONS

(DO NOT SCALE)

DESCRIPTION

- Brass construction
- 1/2" CC or IPS Uponor connections (with 1/4 turn)
- Pressure balancing, four port, cycle valve

OPERATION

- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintain selected discharge temperature to $\pm 3.6^{\circ}\text{F}$

CARTRIDGE


- 1222HD brass cartridge design
- Brass construction stainless steel materials
- Accommodates back to back installations

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF61/9
- Moen's Posi-Temp® and Moentrol® valves with graphite composite spools combined with Moen's Eco-performance showerheads meet the performance requirements of pressure and temperature variation of ASSE1016 when tested as low as 1.5 gpm


WARRANTY

- Warranted for five years against material or manufacturing defects

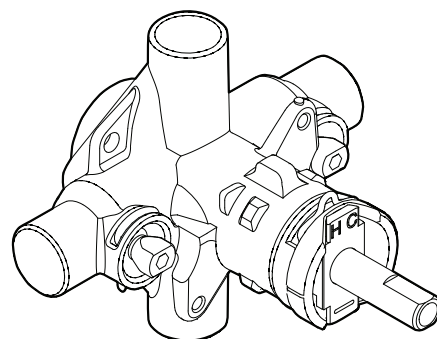

POSI-TEMP® VALVE Pressure-Balancing Valve with 1/4 Turn Stops

Models: 8370HD (CC) without 1/4 Turn Stops,
8371HD (CC), 8372HD (IPS), 8375HD (Uponor)

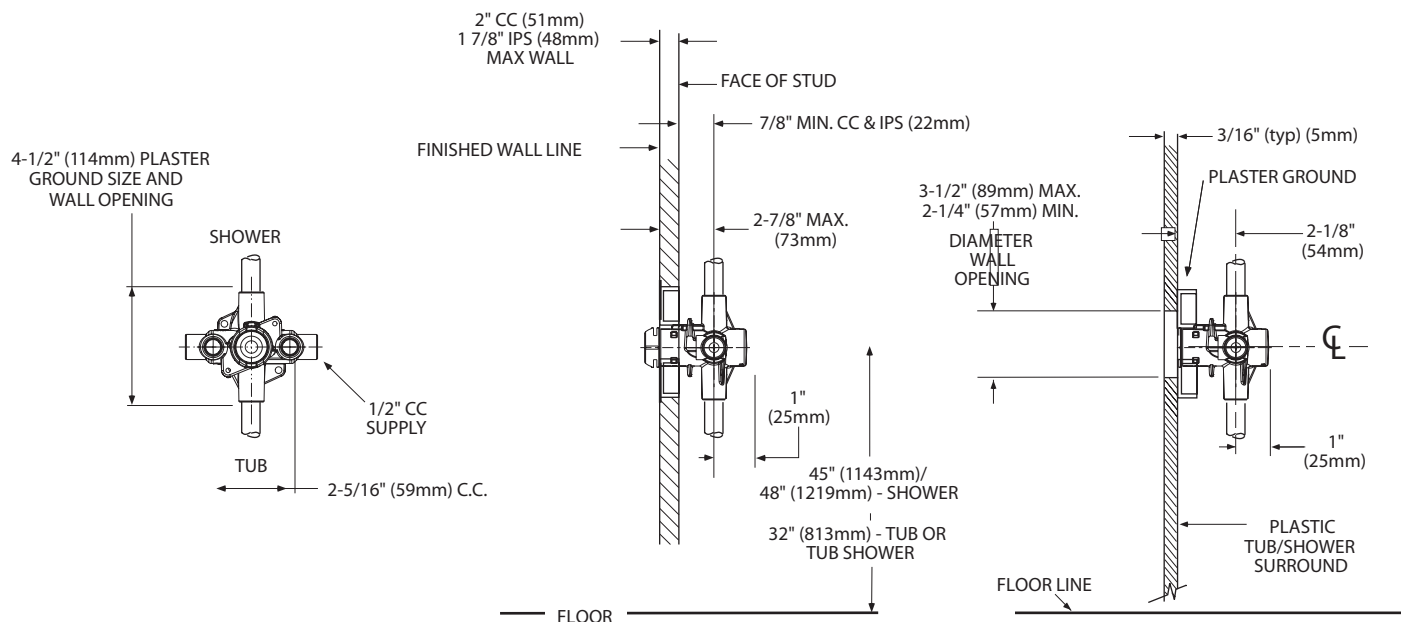

CRITICAL DIMENSIONS

(DO NOT SCALE)