


INSTALLATION INSTRUCTIONS

Drop In Kitchen Sink

INSTALLATION INSTRUCTION MAINTENANCE INSTRUCTIONS OF DROP IN KITCHEN SINK

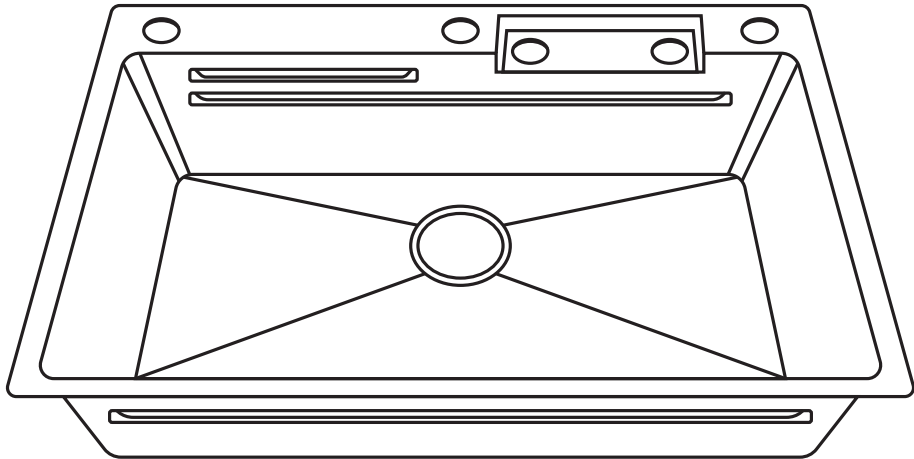

INSTALLATION IN STRUCTION OF DROP IN KITCHEN SINK

IMPORTANT:

1. We strongly recommend that the product be installed by A licensed plumber.
2. We recommend at least two people to lift or mount the sink .



TOOLS NEEDED:

Safety glasses/silicone adhesive sealant/tape measure/Jigsaw/rags/
wood braces/evel/screws/bladed screwdriver



INSTALLATION STEPS:

Step1: Position the Template in the desired location on the countertop.

(Please put the cutout template against the sink and confirm it is suitable. If not,please contact after-sale service)

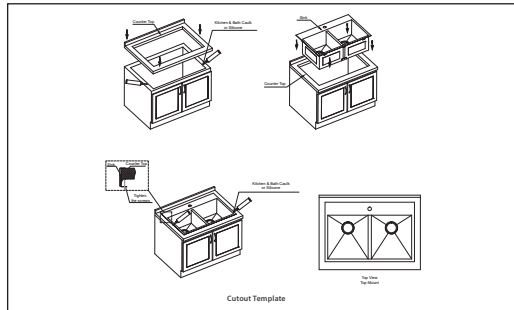



Step2: Trace the Template on countertop with a pencil and Cut the Countertop Accordingly.





Step3: Fix the Sink to Countertop.



1. Put some silicone-based adhesive along the edge of the hole.
2. Insert the sink into the opening, confirm it fits the countertop opening , and press firmly.



3. Tighten the Clips with the sink.



4. Remove excess silicone-based adhesive and allow the sealant to settle for 30-60 minutes.




Step4: Install Plumbing Fixtures

Connect the drain to the sink. Connect the trap to the drain. Connect the watersupply connections to the faucet according to manufacturer's instructions. Drain water into the sink and check for leaks.

FINISH THE INSTALLATION

Step 5: Install Faucet

Pull Out Kitchen Faucet Installation Instructions

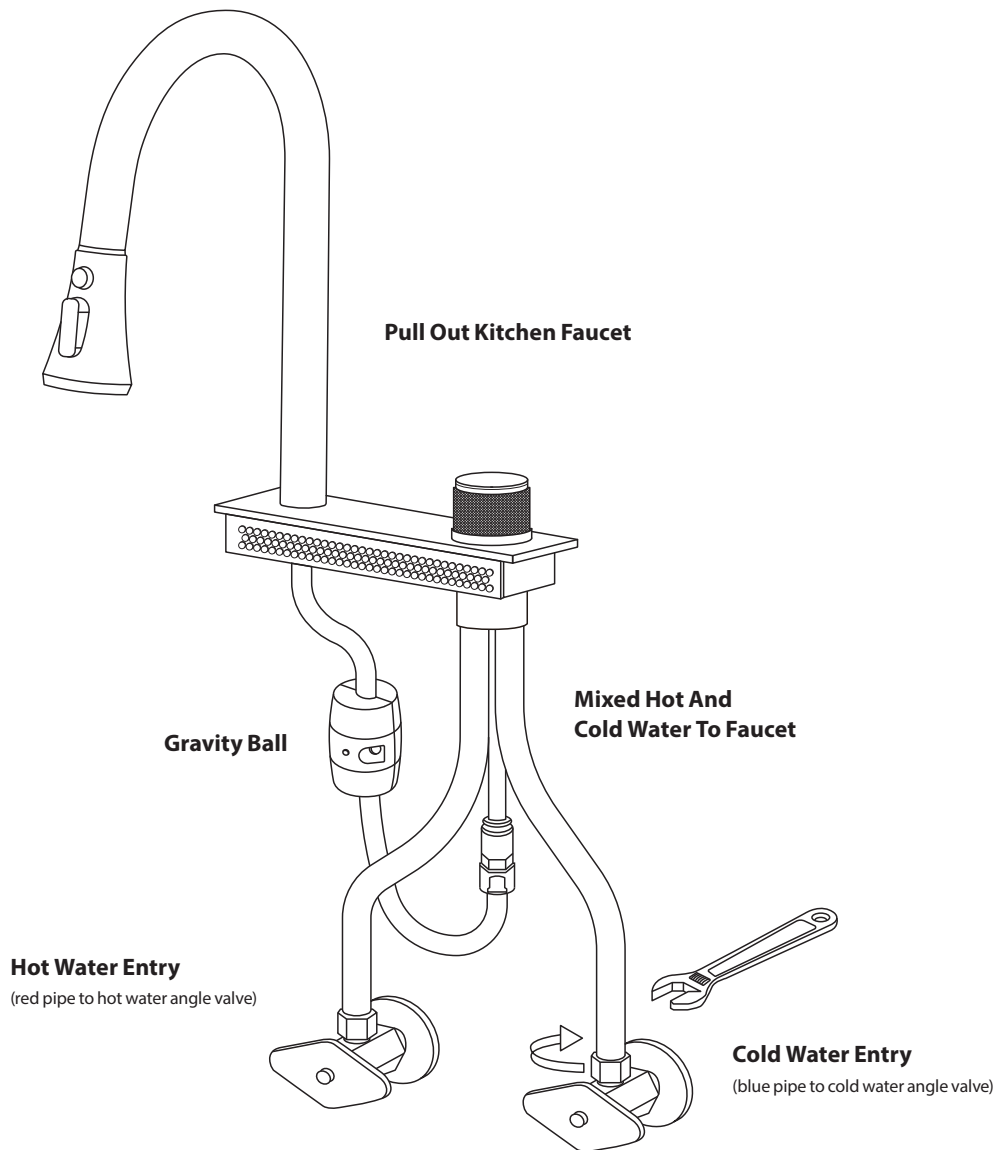

NOTE

The hot water pipe and the cold water pipe are strictly differentiated to prevent the hot and cold water from tempering in the opposite direction.


Step 6: Install Glass Rinser

Read all instructions steps before installation.

Turn off hot and cold water supplies at angle stops before installing glass rinser.



1. For sinks with levelled edges/Granite, Don't need the plastic spacer



2. Put the base on the sink hole



3. Insert the shank into the hole.



4. Put the silicon nozzle into the actuator arms.



5. Screw the actuator arms with the silicon nozzle onto the sink clockwise



6. Screw the black gasket and the metal nut onto the sink, and tighten.



7. Thread the 1/2" end of provided supply line to mounting shank with wrench.



8. Choose cold or hot water for your glass rinser. Unthread existing faucet supply line from angle stop on the chosen side. Thread provided tee onto angle stop with wrench. Thread both the faucet supply line and the 3/8" end of provided supply line to tee. When supply line is installed check alignment and retighten mounting nut.



9. Turn on both water supplies at angle stops and check for leaks at all connections. Finish and enjoy your easy life

MAINTENANCE INSTRUCTIONS

MAINTENANCE INSTRUCTIONS

DO:

1. Clean Daily with soft towel to wipe the sink with warm water, Mixing in some wash-er-fluid is advisable. Remember to wipe it dry.
2. If any mineral substance is built up on the sink, clean it up as soon as possible.
3. Properly remove the rust, molds, or scratches with a scouring pad. Rubbing the sink in the direction of the brush.
4. Rub it slightly with a soft towel in the direction of brushed lines

DO NOT

1. Leave water spots, utensils, or steel cool-ware in the sink for a long time, which could become rust spots on your sink surface.
2. Leave cleaning agents or bleach sitting in your sink for a long time which may cause the sink to discolor or damage the surface.
3. Use steel wool or a scouring pad to rub.
4. Leave rubber mats, cleaning pads, or sponges in the sink for a long time as this may ruin the finish of your sink.
5. Cut food in the sink.
6. The hard water may also cause rust stains.

FAQs

1. Why are there rusts in my new kitchen sink?

Reasons: Rusts and stains on a stainless steel sink can be caused by a variety of factors, including:

- 1.1 Air on pan or other metal pans are left in the sink for days.
- 1.2 Utensils or flatware are left in the sink for days.
- 1.3 Metal cans (pet food cans, vegetables cans, etc.) are left in the sink for days.
- 1.4 The water contains iron (suggestion: get an iron filter to help alleviate this issue).
- 1.5 Certain dish soaps contained by metal bottle or built-in soap dispenser.
- 1.6 Wet sponges or colored towels are left in the sink for days.

Prevention and Treatments:

- 1.1 Install the sink after all innovation project is done and clean your sink right after installation.
- 1.2 Clean your sink after each use.
- 1.3 Properly remove the rusts and molds using a scouring pad.

2. What will scratch or harm the sink?

- 2.1 Improper packaging and accessories can lead to scratch marks during transit.
- 2.2 The sink can be easily scratched by sharp objects, please use soft cloth to clean the sink.

Prevention and Treatments:

- 1.1 Minor scratch: Use a sponge with toothpaste to polish it repeatedly.
- 1.2 Moderate scratch: Use a scouring pad to polish small areas.
- 1.3 Serious scratch: Purchase stainless steel polisher.

