

PRO SERIES RISER COVER INSTALLATION

Part No. 102550




Septic tanks contain dangerous gases that **may cause serious injury or death**. Never enter a septic tank for any reason. Wear appropriate protective equipment during installation and servicing.

Pro Series covers are manufactured using the highest quality UV inhibitor package available to ensure superior resistance to sunlight degradation. However, prolonged exposure to UV radiation will inevitably cause some degree of fading or color change over time. The rate and extent of fading will vary depending on factors such as geographic location, sun intensity, and duration of exposure.

To restore the original appearance, the cover may be recoated using Krylon[®] Fusion for Plastic – Spring Grass (Part No. K02724007) or an equivalent product suitable for outdoor plastic applications.

INSTALLATION STEPS:

① Apply gasket. DO NOT OVERLAP

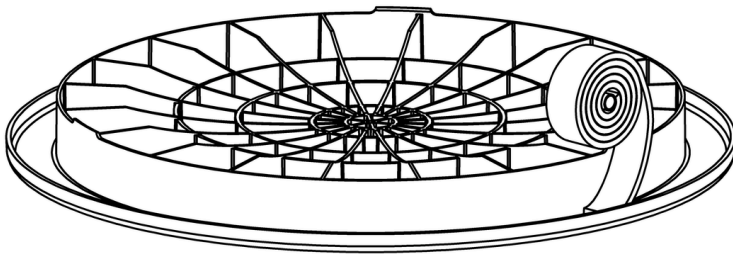


TOOLS REQUIRED:

- Safety Glasses
- Nitrile Gloves
- Drill with Bit Holder

PARTS INCLUDED:

- Pro Series Cover
- Foam Gasket
- (4) Screws, #10 x 1-1/2" Square Drive
- (4) Washers, #10 x 1/2"
- Bit, #2 Square Driver

② Center cover on pipe

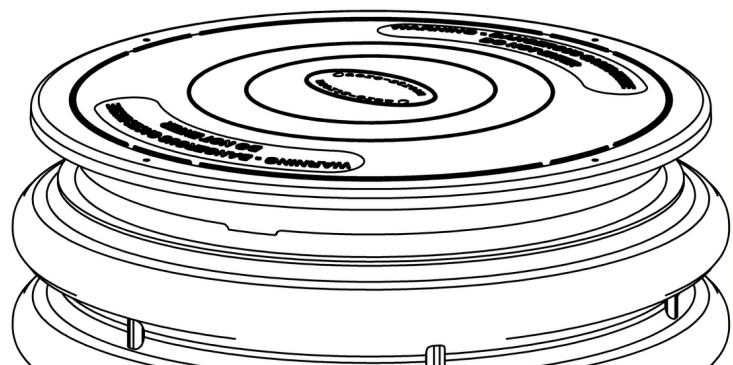

③ Drive screws until washer contacts cover. Tighten an additional ¼ turn to compress gasket. DO NOT OVERTIGHTEN.

