

JOB NAME:

CONTRACTOR:



DATE:

PROFIT



PLASTIC STRIP COLLATION FOR FRAMING NAILS

TYPES

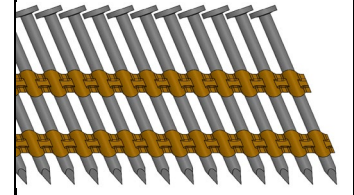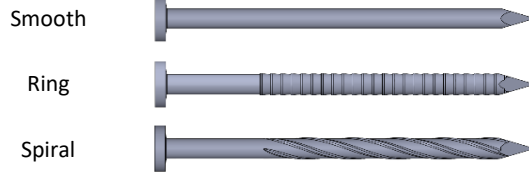

FUNCTION

For general construction framing, sub-flooring, roof sheathing, deck, and fence building
Fits most 20°-22° framing nailers

FEATURES

Collated Fasteners meet or exceed the ASTM F1667 Standard (if applicable)
Smooth Shanks provide lower withdrawal strength when compared to ring shanks and spiral shanks
Ring Shanks are deformed to have repeated ridges to increase withdrawal strength
Spiral Shanks are designed to ease installation into hardwoods and still provide improved withdrawal strength

CORROSION

Hot Dip Galvanized (HDG) in accordance with ASTM A153 Class D standards
300-series Stainless Steel is suitable for all marine applications
316 Stainless Steel is the recommended steel for salt water or chlorinated environments
Brite finishes offer little to no corrosion protection

CAUTION



Proper personal protection equipment (PPE), i.e. safety glasses, must be worn during installation of any fastener
All materials and finish options shall be used in accordance with the recommendation of the treated lumber manufacturer

TECHNICAL	Length x Dia	Penny Length	Gauge (W&M)	Head Diameter	Ring Shank Length, MIN	Nails per Strip	ASTM F1667 Bend Yield*
	2 x .113	6d	11.5	Ø 0.266 in	1.13 in	25	100,000 psi
	2-1/4 x .148	7d	9	Ø 0.312 in	1.13 in	25	100,000 psi
	2-3/8 x .113	-	11.5	Ø 0.266 in	1.25 in	25	100,000 psi
	2-1/2 x .131	8d	10.25	Ø 0.281 in	1.25 in	25	100,000 psi
	3 x .120	10d	11	Ø 0.281 in	1.50 in	25	100,000 psi
	3 x .131	10d	10.25	Ø 0.281 in	1.50 in	25	100,000 psi
	3 x .148	10d	9	Ø 0.312 in	1.50 in	25	100,000 psi
	3-1/4 x .120	12d	11	Ø 0.281 in	1.50 in	25	100,000 psi
	3-1/4 x .131	12d	10.25	Ø 0.281 in	1.50 in	25	100,000 psi
	3-1/4 x .148	12d	9	Ø 0.312 in	1.50 in	25	100,000 psi
	3-3/8 x .131	-	10.25	Ø 0.281 in	1.50 in	25	100,000 psi
	3-1/2 x .131	16d	10.25	Ø 0.281 in	1.50 in	25	100,000 psi
	3-1/2 x .162	16d	8	Ø 0.344 in	1.50 in	25	100,000 psi

* ASTM F1667 Bend Yield is a minimum average value appropriate for non-hardened products only

PLASTIC STRIP COLLATION FOR FRAMING NAILS

TYPES

Smooth



Ring



Spiral



PROFIT



PRODUCT	Size	Box Count QTY	Brite sku	EG sku	HDG sku	304 SS sku	316 SS sku
Smooth	2 x .113	2000	616131	-	-	-	-
Smooth	2-1/2 x .131	5000	616153	-	-	-	-
Smooth	2-1/4 x .148	4000	616240	-	-	-	-
Smooth	2-3/8 x .113	1000	-	-	-	710155	-
Smooth		2000	616151	-	705451	-	-
Smooth		5000	616150	-	705450	-	-
Smooth	3 x .120	2000	616173	-	808171	-	-
Smooth		4000	616171	-	808172	-	-
Smooth	3 x .131	1000	-	-	-	710185	-
Smooth		2000	616172	-	705471	-	-
Smooth		4000	616170	-	-	-	-
Smooth	3-1/4 x .120	2000	-	-	705883	-	-
Smooth		4000	616191	-	-	-	-
Smooth	3-1/4 x .131	2000	616192	-	705882	-	-
Smooth		4000	616190	-	-	-	-
Smooth	3-1/2 x .131	2000	616202	-	-	-	-
Smooth		4000	616200	-	-	-	-
Ring	2 x .113	2000	616141	-	807131	-	-
Ring	2-3/8 x .113	1000	-	-	-	710156	710258
Ring		2000	710151	-	807151	-	-
Ring		5000	710150	-	807150	-	-
Ring	3 x .120	1000	-	-	-	710176	710176S
Ring		2000	616183	-	808181	-	-
Ring		4000	710171	-	808182	-	-
Ring	3 x .131	2000	-	-	705461	-	-
Ring	3-1/4 x .120	1000	-	-	-	-	710286
Ring		4000	-	-	705680	-	-
Spiral	2-3/8 x .113	5000	702150	-	809150	-	-
Spiral	3 x .120	4000	-	-	809171	-	-
Spiral	3 x .131	4000	-	-	809170	-	-
Spiral	3-1/4 x .120	4000	-	-	809191	-	-