



# Cairn®

## 33-1/2" undermount single-bowl kitchen sink

### K-8206

#### Features

- 36" minimum base cabinet width.
- Single bowl.
- 9-1/2" (241 mm) depth provides generous workspace.
- Offset drain increases workspace in the sink and storage space underneath.
- Includes K-5196 sink rack.
- Includes cutout templates and installation clips.
- Matte finish offers rich, dimensional color.

#### Material

- KOHLER Neoroc® composite is durable and built to withstand day-to-day cleaning tasks.
- Solid color throughout the sink.
- Heat-resistant up to 750°F.
- Scratch-, stain-, chip-, and thermal-shock-resistant.

#### Installation

- Undermount.
- Easy to install in a one-person, single-day project.

#### Required Products/Accessories

K-5192 Small stainless steel sink rack for K-8206

or

K-11352 Disposal Flange with Stopper

or

K-8801 Sink drain and strainer with tailpiece

or

K-8799 Sink drain and strainer basket

#### Recommended Products/Accessories

K-23730 Neoroc® cleaner

K-23726 Drain treatment

#### Optional Products/Accessories

K-9000 P-Trap

#### Included Components

Additional Components:

5196



#### Codes/Standards







CSA B45.5/IAPMO Z124


#### KOHLER® Neoroc® Sinks Lifetime Limited Warranty

See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CM6	Matte White
	CM7	Matte Graphite
	CM1	Matte Black
	CM2	Matte Brown
	CM3	Matte Taupe
	CM4	Matte Grey

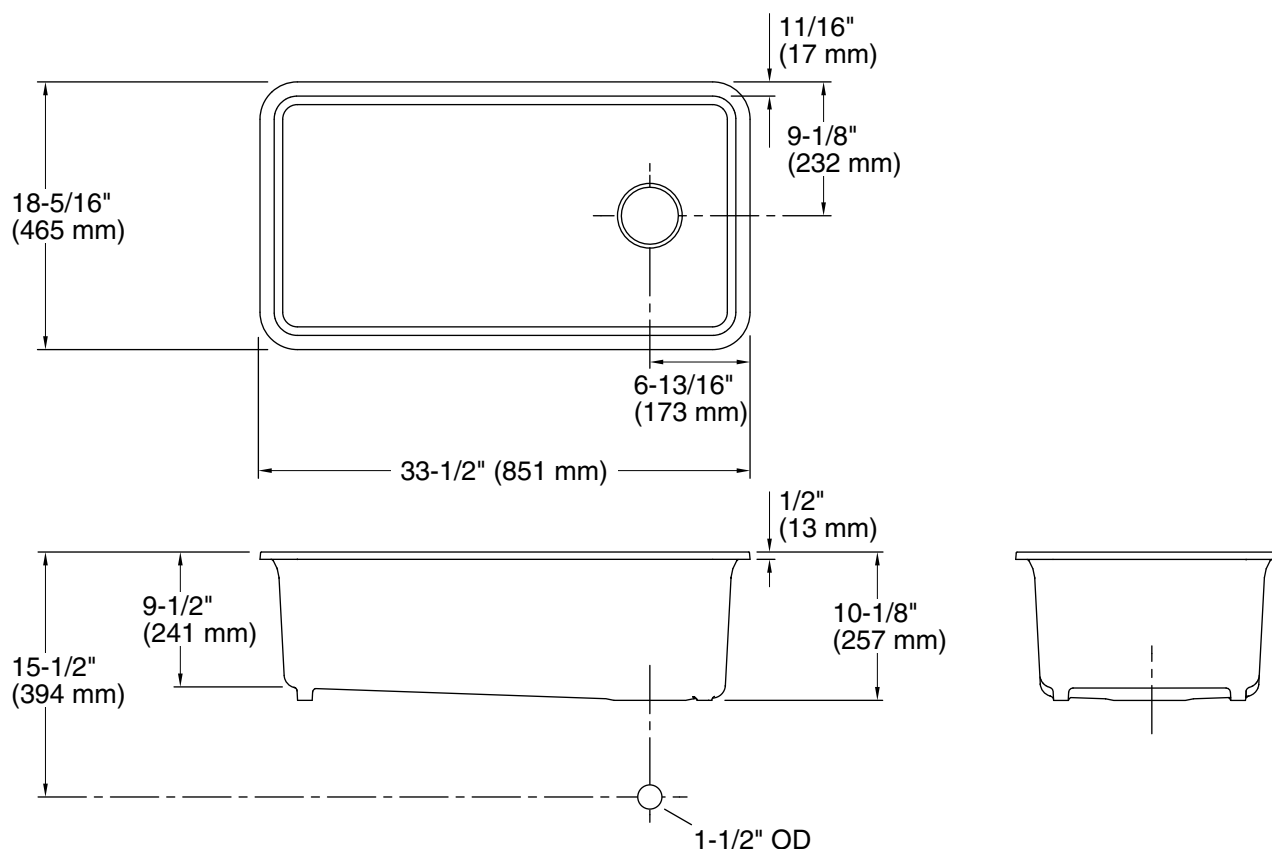

### Technical Information

All product dimensions are nominal.

Bowl configuration: Single

Installation: Undermount

Min. base cabinet width: 36" (914 mm)

Bowl area (Only): Length: 30-9/16" (777 mm)  
Width: 15-3/8" (391 mm)  
Bowl depth: 9-1/2" (241 mm)  
Water depth: 9-1/2" (241 mm)

Drain hole: 3-7/8" (98 mm)

Template: 1256394-7, required, included

### Notes

Install this product according to the installation instructions.

Allow a minimum of 2" (51 mm) clearance around the sink rim for clip attachment.