


# ATLANTIS

## F-072L

52" Ceiling Fan

# WAC FANS LIMITED

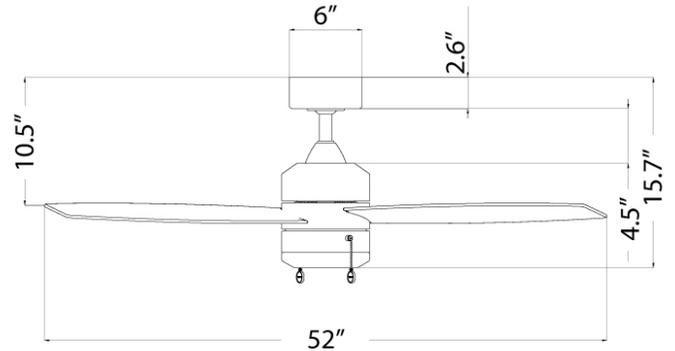

### PRODUCT DESCRIPTION

ATLANTIS from WAC LIMITED offers a Damp rated, high-value fan with three speed options and can be reversed from the housing to pull hot air up during winter months. Enhance your interiors with the gently-curved shape of this elegant fan.

### FEATURES

- 3 fan speeds
- Silent AC motor
- Pull chain operation
- Fan is reversible from housing
- Dim using 0-10v dimmer

### AIRFLOW/ENERGY EFFICIENCY

<b>Weighed-Average Airflow/High:</b>	3717/5001 CFM
<b>Energy Use (W):</b>	40/63 (High)
<b>Estimated Yearly Energy Cost (\$):</b>	11
<b>Efficiency (CFM/W):</b>	92 (High)
<b>Max RPM:</b>	188

### ORDER NUMBER

Model	Housing	Blade
F-072L	<b>BN</b> <i>Brushed Nickel</i>	<b>TT</b> <i>Titanium Silver</i>
	<b>MB</b> <i>Matte Black</i>	<b>MB</b> <i>Matte Black</i>
	<b>MW</b> <i>Matte White</i>	<b>MW</b> <i>Matte White</i>

### F-072L-\_\_

Example: F-072L-MB

### SPECIFICATIONS

<b>Construction:</b>	Steel, Plywood
<b>Blade:</b>	13° Pitch, 52" sweep
<b>Downrod:</b>	3/4"W X 6"H included
<b>Mounting Slope:</b>	Up to 30°
<b>Wire:</b>	80"
<b>Hanging Weight:</b>	18 lbs
<b>Total Power:</b>	83W
<b>Standards:</b>	Title 24 Compliant, Title 20 Compliant, Energy Star Rated, UL, cUL
<b>Motor Type:</b>	AC-153 x 16

### LUMINAIRE PERFORMANCE

<b>Light Source:</b>	LED
<b>Light Wattage:</b>	19.5W
<b>Lumens/Delivered Lumens:</b>	1600/708
<b>Dimming:</b>	0-10v
<b>CRI:</b>	90
<b>Color Temperature:</b>	3000K
<b>Rated Life:</b>	50,000 hours

wacighting.com  
Phone (800) 526.2588  
Fax (800) 526.2585

Headquarters/Eastern Distribution Center  
44 Harbor Park Drive  
Port Washington, NY 11050

Central Distribution Center  
1600 Distribution Ct  
Lithia Springs, GA 30122

Western Distribution Center  
1750 Archibald Avenue  
Ontario, CA 91760

# ATLANTIS

## F-072L

52" Ceiling Fan

### OPTIONAL ACCESSORIES

Downrod		<b>DR12-</b> 12IN <b>DR18-</b> 18IN <b>DR24-</b> 24IN <b>DR36-</b> 36IN <b>DR48-</b> 48IN <b>DR60-</b> 60IN <b>DR72-</b> 72IN	<b>BN</b> Brushed Nickel <b>MB</b> Matte Black <b>MW</b> Matte White	All of our downrods are .75" O.D. and are threaded on the motor end to create an extra layer of security and allow for adjustments in the field.
Downrod Couplers		<b>DC-</b>		Connects two downrods together.
Sloped Ceiling Kit		<b>SC-</b>		Designed to accommodate buildings with steeper sloped ceilings up to 45° or 12/12 pitch.

Examples: Downrod - **DR12-BN**, Downrod Coupler - **DC-MB**, Sloped Ceiling Kit - **SC-MW**

### SUGGESTED DOWNROD HEIGHT USAGE

Ceiling Height	15'	14'	13'	12'	11'	10'	9'
Downrod	72"	60"	48"	36"	24"	18"	12"

### SLOPED CEILING DEGREE CONVERSION CHART

Degree	4-8°	9-13o	14-17o	18-21o	22-25o	26-29o	30-32o	33-35o	36-38o	39-41o	42-44o	45o
Ceiling Slope	1/12	2/12	3/12	4/12	5/12	6/12	7/12	8/12	9/12	10/12	11/12	12/12
Pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch	pitch

Supplied mounting brackets allow mounting on ceiling slopes up to 30° (7/12 pitch). Optional slope kit allows mounting on ceilings up to 45° (12/12 pitch). The receiver will mount inside canopy up to 45°.

**NOTE:** Recommended maximum downrod length of 72" with 80" lead wire