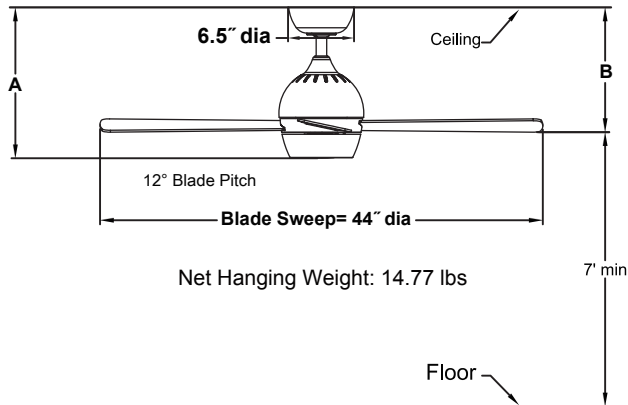


KWAD™ 44**FP7644******44" Ceiling Fan**

	A	B
Fan w/4.5" downrod	15.05"	12.27"
Fan w/12" downrod	22.55"	19.77"
Fan w/18" downrod	28.55"	25.77"
Fan w/24" downrod	34.55"	31.77"
Fan w/36" downrod	46.55"	43.77"
Fan w/48" downrod	58.55"	55.77"
Fan w/60" downrod	70.55"	67.77"
Fan w/72" downrod	82.55"	79.77"

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 13 AC motor is designed for optimal performance with this fan.

BLADE SETS:

A set of four 19.49" plywood blades is included.

CONTROL OPTIONS:

TR500 hand-held remote control is included. Push button remote control with variable fan speeds, infinite light levels and off button. Optional WC2WH, WR501WH and CWRL4 wall controls, BTRC9 and CRL4WH hand-held remote controls and BTR9 receiver unit and WFR50 WiFi receiver unit are available—sold separately. Instructions are provided with each control.

LIGHTING OPTIONS:

One 18-watt dimmable LED included.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-4.5). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 4.5" downrod. Optional sloped ceiling kits (SCB1-52) are available for slope an angles up to 42°. Optional close-to-ceiling kit is available as well—sold separately. Call technical support for more information.

LOCATION USE:

Fan is rated for dry locations only.

Available Finishes

BL	Black with Black Blade and Opal Frosted Glass
BN	Brushed Nickel with Brushed Nickel/Black Blade and Opal Frosted Glass
CH	Chrome with Black Blade and Opal Frosted Glass
DZ	Dark Bronze with Cherry/Dark Walnut Blade and Opal Frosted Glass
GR	Matte Greige with Weathered Wood Blade and Opal Frosted Glass
MW	Matte White with Matte White Blade and Opal Frosted Glass

Airflow / Energy Efficiency Info (120V)

Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	195	3533	80	0.37	44
Med	140	2633	105	0.28	25
Low	84	1497	147	0.18	10

Energy Guide FTC

Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
29	2579	8	88

Light Bulb Information (120V)

Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1500	3000	90%